SCOPE OF WORK

Window Wall Curb and Parking Garage Repair

Motor Vehicle Commission Building Trenton, Mercer County, N.J.

PROJECT NO. A1138-00

STATE OF NEW JERSEY

Honorable Chris Christie, Governor Honorable Kim Guadagno, Lt. Governor

DEPARTMENT OF THE TREASURY

Andrew P. Sidamon-Eristoff, Treasurer



DIVISION OF PROPERTY MANAGEMENT AND CONSTRUCTION

Steven Sutkin, Director

Date: March 6, 2012

PROJECT NO: A1138-00 DATE: March 6, 2012

TABLE OF CONTENTS

SEC	ECTION	
I.	OBJECTIVE	6
II.	CONSULTANT QUALIFICATIONS	6
A.	CONSULTANT & SUB-CONSULTANT PRE-QUALIFICATIONS	
III.	PROJECT BUDGET	6
A. B. C. D.	CONSTRUCTION COST ESTIMATE (CCE)CURRENT WORKING ESTIMATE (CWE)COST ESTIMATINGCONSULTANT'S FEES	6 6
IV.	PROJECT SCHEDULE	7
A. B. C. D. E.	SCOPE OF WORK DESIGN & CONSTRUCTION SCHEDULE	8 8
V.	PROJECT SITE LOCATION & TEAM MEMBERS	10
	PROJECT SITE ADDRESS	10 10
VI.	PROJECT DEFINITION	11
A. B.	BACKGROUNDFUNCTIONAL DESCRIPTION OF THE BUILDING	11
VII.	. CONSULTANT DESIGN RESPONSIBILITIES	12
3 B.	DESIGN REQUIREMENTS 1. Window Wall: 2. Entrance Pier: 3. Parking Garage: GENERAL DESIGN OVERVIEW 1. Design Detail: 2. Specification Format:	

PROJECT NO: A1138-00 DATE: March 6, 2012

C. PROJECT COMMENCEMENT	
1. Project Directory:	
2. Site Access:	
3. Project Coordination:	13
4. Existing Documentation:	14
5. Scope of Work:	14
6. Project Schedule:	14
D. BUILDING & SITE INFORMATION	14
1. Building Classification:	
2. Building Block & Lot Number:	15
3. Building Site Plan:	
4. Site Location Map:	
E. DESIGN MEETINGS & PRESENTATIONS	
1. Design Meetings:	
2. Design Presentations:	
VIII. CONSULTANT CONSTRUCTION RESPONSIBILITIES	16
A. GENERAL CONSTRUCTION ADMINISTRATION OVERVIEW	16
B. PRE-BID MEETING	
C. BID OPENING	
D. POST BID REVIEW MEETING, RECOMMENDATION FOR AWARD	
1. Post Bid Review:	
2. Review Meeting:	
3. Substitutions:	
4. Schedule:	
5. Performance:	
6. Superintendent:	
7. Letter of Recommendation:	
8. Conformed Drawings:	
E. DIRECTOR'S HEARING	
F. CONSTRUCTION JOB MEETINGS, SCHEDULES, LOGS	
e	
 Schedules:	
H. SUB-CONSULTANT PARTICIPATION	
I. DRAWINGS	
1. Shop Drawings:	
2. As-Built & Record Set Drawings:	
J. CONSTRUCTION DEFICIENCY LIST	
K. INSPECTIONS: SUBSTANTIAL & FINAL COMPLETION	
L. CLOSE-OUT DOCUMENTS	
M. CLOSE-OUT ACTIVITY TIME	23

N.	TESTING, TRAINING, MANUALS AND ATTIC STOCK	23
1	ϵ	
2	\boldsymbol{c}	
3	1	
4		
Ο.		
1		
2		
3		
4		
5		
6		
7		
8		
9	. Consultant Fee:	
IX.	PERMITS & APPROVALS	27
Α.	REGULATORY AGENCY PERMITS	27
A.		
2		
3	• • •	
В.	BARRIER FREE REQUIREMENTS	
C.	STATE INSURANCE APPROVAL	
D.	PUBLIC EMPLOYEES OCCUPATIONAL SAFETY & HEALTH PROGRAM	
E.	MULTI-BUILDING OR MULTI-SITE PERMITS	
F.	PERMIT MEETINGS.	
G.	MANDATORY NOTIFICATIONS	
H.	CONSTRUCTION TRAILER PERMITS	
I.	SPECIAL INSPECTIONS	
1		
2	. Responsibilities:	31
3	. Special Inspections:	31
Χ.	GENERAL REQUIREMENTS	31
A.	SCOPE CHANGES	31
В.	ERRORS and omissions	
C.	ENERGY INCENTIVE PROGRAM	
D.	AIR POLLUTION FROM ARCHITECTURAL COATINGS	
XI.	ALLOWANCES	32
A	PERMIT FEE ALLOWANCE	32
	Permits:	

PROJECT NO: A1138-00 DATE: March 6, 2012

2.	Permi	t Costs:	33
3.		cations:	
4.	Consi	ıltant Fee:	33
XII.	SUB	MITTAL REQUIREMENTS	33
Α.	CONTR	ACT DELIVERABLES	33
В.		OG CUTS	
C.		CT DOCUMENT BOOKLET	
D.		N DOCUMENT CHANGES	
E.		E-PRIME CONTRACT	
		SIGNATURE APPROVAL SHEETError! Bookmark rate of the state	
XV.	EXH	IBITS	40
	A. B. C. D.	SAMPLE PROJECT SCHEDULE FORMAT MOTOR VEHICLE COMMISSION BUILDING PROJECT SITE MAP PHOTOS OF PARKING GARAGE-EXPANSION JOINTS JOSEPH B. CALLAGHAN, INC. REPORT, EXTERIOR WINDOW WAL STUDY WITH MISCELLANEOUS PARKING GARAGE CONDITIONS	L CURB

PROJECT NO: A1138-00 DATE: March 6, 2012

I. OBJECTIVE

The objective of this project is to repair a window wall curb on the front of the building and sealant joints in the parking garage at the Motor Vehicle Commission Building in Trenton.

II. CONSULTANT QUALIFICATIONS

A. CONSULTANT & SUB-CONSULTANT PRE-QUALIFICATIONS

The Consultant shall be a firm pre-qualified with the Division of Property Management & Construction (DPMC) in the P007 Structural Engineering Professional Discipline and have inhouse capabilities or Sub-Consultants pre-qualified with DPMC in all other Architectural, Engineering and Specialty Disciplines necessary to complete the project as described in this Scope of Work (SOW).

III. PROJECT BUDGET

A. CONSTRUCTION COST ESTIMATE (CCE)

The initial Construction Cost Estimate (CCE) for this project is \$130,000.

The Consultant shall review this Scope of Work and provide a narrative evaluation and analysis of the accuracy of the proposed project CCE in their technical proposal based on their professional experience and opinion.

B. CURRENT WORKING ESTIMATE (CWE)

The Current Working Estimate (CWE) for this project is \$185,000.

The CWE includes the construction cost estimate and all consulting, permitting and administrative fees.

The CWE is the Client Agency's financial budget based on this project Scope of Work and shall not be exceeded during the design and construction phases of the project unless DPMC approves the change in Scope of Work through a Contract amendment.

PROJECT NO: A1138-00 DATE: March 6, 2012

C. COST ESTIMATING

On projects with a CCE under \$750,000, the estimate may be prepared by the Consultant's inhouse staff or their Sub-Consultant's staff during each design phase of the project. However, if the CCE is \$750,000 or larger, the Consultant or Sub-Consultant providing the estimate must be pre-qualified with DPMC in the P025 Estimating/Cost Analysis Specialty Discipline.

All cost estimates shall be adjusted for regional location, site factors, construction phasing, premium time, building use group, location of work within the building, temporary swing space, security issues, and inflation factors based on the year in which the work is to be performed.

All cost estimates must be submitted on a DPMC-38 Project Cost Analysis form at each design phase of the project with a detailed construction cost analysis in CSI format (2004 Edition) for all appropriate divisions and sub-divisions. The Project Manager will provide cost figures for those items which may be in addition to the CCE such as art inclusion, CM services, etc. and must be included as part of the CWE. This cost analysis must be submitted for all projects regardless of the Construction Cost Estimate amount.

D. CONSULTANT'S FEES

The construction cost estimate for this project *shall not* be used as a basis for the Consultant's design and construction administration fees. The Consultant's fees shall be based on the information contained in this Scope of Work document and the observations made and/or the additional information received during the pre-proposal meeting.

IV. PROJECT SCHEDULE

A. SCOPE OF WORK DESIGN & CONSTRUCTION SCHEDULE

The following schedule identifies the estimated design and construction phases for this project and the estimated durations.

PROJECT PHASE ESTIMATED DURATION (Calendar Days) 1. Design Development Phase • Project Team & DPMC Plan/Code Unit Review & Comment 14 2. Final Design Phase • Project Team & DPMC Plan/Code Unit Review & Approval 14

PROJECT NAME: Window Wall Curb and Parking Garage Repair

PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 DATE: March 6, 2012

3.	Permit Application Phase • Issue Permit	7
4.	Bid Phase	42
5.	Award Phase	28
6.	Construction Phase	90

В. CONSULTANT'S PROPOSED DESIGN & CONSTRUCTION **SCHEDULE**

The Consultant shall submit a project design and construction bar chart schedule with their technical proposal that is similar in format and detail to the schedule depicted in **Exhibit 'A'**. The bar chart schedule developed by the Consultant shall reflect their recommended project phases, phase activities, activity durations.

The Consultant shall estimate the duration of the project Close-Out Phase based on the anticipated time required to complete each deliverable identified in Section XIV of this document entitled "Contract Deliverables - Project Close-Out Phase" and include this information in the bar chart schedule submitted.

A written narrative shall also be included with the technical proposal explaining the schedule submitted and the reasons why and how it can be completed in the time frame proposed by the Consultant.

This schedule and narrative will be reviewed by the Consultant Selection Committee as part of the evaluation process and will be assigned a score commensurate with clarity and comprehensiveness of the submission.

C. CONSULTANT DESIGN SCHEDULE

The Project Manager will issue the Consultant's approved project schedule at the first design kickoff meeting. This schedule will be binding for the Consultant's activities and will include the start and completion dates for each design activity. The Consultant and Project Team members shall use this schedule to ensure that all design milestone dates are being met for the project. The Consultant shall update the schedule to reflect performance periodically (minimally at each design phase) for the Project Team review and approval. Any recommendations for deviations from the approved design schedule must be explained in detail as to the causes for the deviation(s) and impact to the schedule.

PROJECT NO: A1138-00 DATE: March 6, 2012

D. BID DOCUMENT CONSTRUCTION SCHEDULE

The Consultant shall include a construction schedule in Division 1 of the specification bid document. This schedule shall contain, at minimum, the major activities and their durations for each trade specified for the project. This schedule shall be in "bar chart" format and will be used by the Contractors as an aid in determining their bid price. It shall reflect special sequencing or phased construction requirements including, but not limited to: special hours for building access, weather restrictions, imposed constraints caused by Client Agency program schedules, security needs, lead times for materials and equipment, anticipated delivery dates for critical items, utility interruption and shut-down constraints, and concurrent construction activities of other projects at the site and any other item identified by the Consultant during the design phases of the project.

E. CONTRACTOR CONSTRUCTION PROGRESS SCHEDULE

The Contractor shall be responsible for preparing a coordinated combined progress schedule with the Sub-Contractors after the award of the contract. This schedule shall meet all of the requirements identified in the Consultant's construction schedule. The construction schedule shall be completed in accordance with the latest edition of the Instructions to Bidders and General Conditions entitled, "Article 9, Construction Progress Schedule" (No CPM).

The Consultant must review and analyze this progress schedule and recommend approval/disapproval to the Project Team until a satisfactory version is approved by the Project Team. The Project Team must approve the baseline schedule prior to the start of construction and prior to the Contractor submitting invoices for payment.

The Consultant shall note in Division 1 of the specification that the State will not accept the progress schedule until it meets the project contract requirements and any delays to the start of the construction work will be against the Contractor until the date of acceptance by the State.

The construction progress schedule shall be reviewed, approved, and updated by the Contractor of schedule, Consultant, and Project Team members at each regularly scheduled construction job meeting and the Consultant shall note the date and trade(s) responsible for project delays (as applicable).

PROJECT NO: A1138-00 DATE: March 6, 2012

V. PROJECT SITE LOCATION & TEAM MEMBERS

A. PROJECT SITE ADDRESS

The location of the project site is:

Motor Vehicle Commission Building 225 East State Street Trenton, New Jersey 08625

See Exhibit 'B' for the project site plan.

B. PROJECT TEAM MEMBER DIRECTORY

The following are the names, addresses, and phone numbers of the Project Team members.

1. **DPMC Representative:**

Name: Eugene Cardone, Project Manager

Address: <u>Division Property Management & Construction</u>

20 West State Street, 3rd Floor

Trenton, NJ 08625

Phone No: (609) 633-2648

E-Mail No: Eugene.cardone@treas.state.nj.us

2. Client Agency Representative:

Name: Gary Karr, Chief, Property Management

Address: Division Property Management & Construction

20 West State Street, 3rd Floor

Trenton, NJ 08625

Phone No: (609) 984-5933

E-Mail No: Gary.Karr@treas.state.nj.us

PROJECT NO: A1138-00 DATE: March 6, 2012

VI. PROJECT DEFINITION

A. BACKGROUND

In 2008, The State of New Jersey procured the services of Joseph B. Callaghan, Inc., Consulting Engineers to perform a condition survey of the exterior window wall along the north elevation, on East State Street, of the Motor Vehicle Commission Building in Trenton. In addition to the window wall, Callaghan investigated masonry distress at the west pier of the main entrance and concrete foundation wall distress and water intrusion in the basement and sub–basement parking levels. Test probes were conducted in two areas along the window wall to determine the sources of distress and verify the existing construction.

The results of the condition survey and the report from Callaghan with repair recommendations and photos are shown in **Exhibit 'D'**. This project will address <u>some</u> of the repair items mentioned in the Callaghan report and additional repair items that have been identified since the report was completed.

The window wall curb located west of the main entrance and identified as needing repair in the Callaghan report will be repaired in this project. In addition, the window wall curb located east of the main entrance in front of Dunkin Donuts will be repaired.

The cracked and displaced brick on the entrance pier on the west side of the main entrance as identified in the Callaghan report will be repaired in this project.

The parking level repairs for the construction joints in the basement and sub-basement level as mentioned in the Callaghan report will not be addressed in this project. Since Callaghan's report came out in February, 2009, problems with the urethane sealant joints on the fifth and sixth levels of the parking garage have been identified. Joint material has come loose allowing water infiltration into the joints and lower levels of the garage. The fifth and sixth level sealant joints are exposed to the elements and require repair. See **Exhibit 'C'** for photos.

B. FUNCTIONAL DESCRIPTION OF THE BUILDING

1. Building Description:

The Motor Vehicle Commission Building, also known as the Trenton Office Complex, was constructed in 1991 as a design-build project by the New Jersey Economic Development Authority (EDA). It is a nine story steel framed and panelized masonry façade office building with an attached six story parking garage. The building totals approximately 450,000 square feet and consists of retail and common space on the first floor of the building, while floors 2 through 9 are office and administrative space used by the Motor Vehicle Commission.

PROJECT NO: A1138-00 DATE: March 6, 2012

The window wall consists of aluminum framed windows that sit on cast stone curbs of varying heights. The curbs have exhibited uneven movement along their length. This is more evident along the window wall west of the main entrance. Test probes indicate that metal shims were used to set and level the stone curbs on top of the foundation wall below. The shims have been corroded in various places causing expansion and displacement of the supported stone curbs. The uneven displacement is creating deformation on the window frame.

VII.CONSULTANT DESIGN RESPONSIBILITIES

A. DESIGN REQUIREMENTS

1. Window Wall:

The Consultant shall provide the design and specifications to repair the window wall curb at the areas west of the main entrance to the building identified in the Callaghan report and in areas east of the main entrance in front of Dunkin Donuts. Included in the design shall be the installation of a sealant joint between the stone curbs and sidewalk and the repair of vertical and horizontal sealant joints in the above mentioned areas.

2. Entrance Pier:

The Consultant shall provide the design and specifications to repair the cracked and displaced brick at the pier west of the main entrance to the building as identified in the Callaghan report.

3. Parking Garage:

The Consultant shall provide the design and specifications to repair all of the existing urethane sealant joints on the fifth and sixth levels of the parking garage that are exposed to the elements. A traffic management plan will be required.

B. GENERAL DESIGN OVERVIEW

1. Design Detail:

Section VII of this Scope of Work is intended as a guide for the Consultant to understand the overall basic design requirements of the project and is not intended to identify each specific design component related to code and construction items. The Consultant shall provide those details during the design phase of the project ensuring that they are in compliance with all applicable codes, regulating authorities, and the guidelines established in the DPMC Procedures for Architects and Engineers Manual.

PROJECT NO: A1138-00 DATE: March 6, 2012

The Consultant shall understand that construction documents submitted to DPMC shall go beyond the basic requirements set forth by the current copy of the Uniform Construction Code NJAC 5:23-2.15(f). Drawings and specifications shall provide detail beyond that required to merely show the nature and character of the work to be performed. The construction documents shall provide sufficient information and detail to illustrate, describe and clearly delineate the design intent of the Consultant and enable all Contractors to uniformly bid the project.

The Consultant shall ensure that all of the design items described in this scope of work are addressed and included in the project drawings and specification sections where appropriate.

It shall be the Consultant's responsibility to provide all of the design elements for this project. Under no circumstance may they delegate the responsibility of the design; or portions thereof, to the Contractor unless specifically allowed in this Scope of Work.

2. Specification Format:

The Consultant shall ensure that the project design specifications are formatted in the revised and expanded version of the Construction Specifications Institute (CSI) format entitled "Master Format 2004 Edition: Numbers and Titles."

The Consultant shall review all of the CSI Master Format 2004 specification sections listed and remove those that do not apply and edit those that remain so they are consistent and specific to this project scope of work.

C. PROJECT COMMENCEMENT

A pre-design meeting shall be scheduled with the Consultant and the Project Team members at the commencement of the project to obtain and/or coordinate the following information:

1. Project Directory:

Develop a project directory that identifies the name and phone number of key designated representatives who may be contacted during the design and construction phases of this project.

2. Site Access:

Develop procedures to access the project site and provide the names and phone numbers of approved escorts when needed. Obtain copies of special security and policy procedures that must be followed during all work conducted at the facility and include this information in Division 1 of the specification.

3. Project Coordination:

PROJECT NO: A1138-00 DATE: March 6, 2012

Review and become familiar with any current and/or future projects at the site that may impact the design, construction, and scheduling requirements of this project. Incorporate all appropriate information and coordination requirements in Division 1 of the specification.

4. Existing Documentation:

Review any documents and additional information that may be provided at a later date such as reports, studies, surveys, equipment manuals, as-built drawings, etc. The State does not attest to the accuracy of the information provided and accepts no responsibility for the consequences of errors by the use of any information and material contained in the documentation provided. It shall be the responsibility of the Consultant to verify the contents and assume full responsibility for any determination or conclusion drawn from the material used. If the information provided is insufficient, the Consultant shall take the appropriate actions necessary to obtain the additional information required.

All original documentation shall be returned to the provider at the completion of the project.

5. Scope of Work:

Review the design and construction administration responsibilities and the submission requirements identified in this Scope of Work with the Project Team members. Items such as: contract deliverables, special sequencing or phased construction requirements, special hours for construction based on Client Agency programs or building occupancy, security needs, delivery dates of critical and long lead items, utility interruptions or shut down constraints for tie-ins, weather restrictions, and coordination with other project construction activities at the site shall be addressed.

This information and all general administrative information; including a narrative summary of the work for this project, *shall be included in Division 1* of the specification. The Consultant shall assure that there are no conflicts between the information contained in Division 1 of the specification and the DPMC General Conditions.

6. Project Schedule:

Review and update the project design and construction schedule with the Project Team members.

D. BUILDING & SITE INFORMATION

The following information shall be included in the project design documents.

1. Building Classification:

PROJECT NO: A1138-00 DATE: March 6, 2012

Provide the building Use Group Classification and Construction Type on the appropriate design drawing.

2. Building Block & Lot Number:

Provide the site Block and Lot Number on the appropriate design drawing.

3. Building Site Plan:

Only when the project scope involves site work, or when the design triggers code issues that require site information to show code compliance, shall a site plan be provided that is drawn in accordance with an accurate boundary line survey. The site plan shall include, but not be limited to, the following as may be applicable:

- The size and location of new and existing buildings and additions as well as other structures.
- The distance between buildings and structures and to lot lines.
- Established and new site grades and contours as well as building finished floor elevations.
- New and existing site utilities, site vehicular and pedestrian roads, walkways and parking areas.

4. Site Location Map:

Provide a site location map on the drawing cover sheet that identifies the vehicular travel routes from major roadways to the project construction site and the approved access roads to the Contractor's worksite staging area.

E. DESIGN MEETINGS & PRESENTATIONS

1. Design Meetings:

Conduct the appropriate number of review meetings with the Project Team members during each design phase of the project so they may determine if the project meets their requirements, question any aspect of the contract deliverables, and make changes where appropriate. The Consultant shall describe the philosophy and process used in the development of the design criteria and the various alternatives considered to meet the project objectives. Selected studies, sketches, cost estimates, schedules, and other relevant information shall be presented to support the design solutions proposed. Special considerations shall also be addressed such as: Contractor site access limitations, utility shutdowns and switchover coordination, phased construction and schedule requirements, security restrictions, available swing space, material and equipment delivery dates, etc.

PROJECT NO: A1138-00 DATE: March 6, 2012

It shall also be the responsibility of the Consultant to arrange and require all critical Sub-Consultants to be in attendance at the design review meetings.

Record the minutes of each design meeting and distribute within seven (7) calendar days to all attendees and those persons specified to be on the distribution list by the Project Manager.

2. Design Presentations:

The minimum number of design presentations required for each phase of this project is identified below for reference:

Design Development Phase: One (1) oral presentation at phase completion.

Final Design Phase: One (1) oral presentation at phase completion.

VIII.CONSULTANT CONSTRUCTION RESPONSIBILITIES

A. GENERAL CONSTRUCTION ADMINISTRATION OVERVIEW

This section of the Scope of Work is intended as a guide for the Consultant to understand their overall basic construction administration responsibilities for the project and does not attempt to identify each specific activity or deliverable required during this phase. The Consultant shall obtain that information from the current publication of the DPMC Procedures for Architects and Engineers Manual and any additional information provided during the Consultant Selection Process.

B. PRE-BID MEETING

The Consultant shall attend, chair, record and distribute minutes of the Contractor pre-bid meetings. When bidders ask questions that may affect the bid price of the project, the Consultant shall develop a Bulletin(s) to clarify the bid documents in the format described in the Procedures for Architects and Engineers Manual, Section 9.2 entitled "Bulletins." These Bulletins must be sent to DPMC at least seven (7) calendar days prior to the bid opening date. DPMC will then distribute the document to all bidders.

C. BID OPENING

The Consultant must attend the bid opening held at the designated location.

In the event that the construction bids received exceed the Consultant's approved final cost estimate by 5% or more, the Consultant shall redesign and/or set up sufficient approved alternate

PROJECT NO: A1138-00 DATE: March 6, 2012

designs, plans and specifications for the project work, to secure a bid that will come within the allocation specified by the State without impacting the programmatic requirements of the project. Such redesign work and changes to plans, including reproduction costs for submission in order to obtain final approval and permits, shall be undertaken by the Consultant at no additional cost to the State.

D. POST BID REVIEW MEETING, RECOMMENDATION FOR AWARD

The Consultant; in conjunction with the Project Manager, shall review the bid proposals submitted by the various Contractors to determine the low responsible bid for the project. The Consultant; in conjunction with the Project Manager, shall develop a post bid questionnaire based on the requirements below and schedule a post bid review meeting with the Contractor's representative to review the construction costs and schedule, staffing, and other pertinent information to ensure they understand the Scope of the Work and that their bid proposal is complete and inclusive of all requirements necessary to deliver the project in strict accordance with the plans and specifications.

1. Post Bid Review:

Review the project bid proposals including the alternates, unit prices, and allowances within seven (7) calendar days from the bid due date. Provide a bid tabulation matrix comparing all bids submitted and make a statement about the high, low, and average bids received. Include a comparison of the submitted bids to the approved current construction cost estimate. When applicable, provide an analysis with supporting data, detailing why the bids did not meet the construction cost estimate.

2. Review Meeting:

Arrange a meeting with the apparent low bid Contractor to discuss their bid proposal and other issues regarding the award of the contract. Remind the Contractor that this is a Lump Sum bid. Request the Contractor to confirm that their bid proposal does not contain errors. Review and confirm Alternate pricing and Unit pricing and document acceptance or rejection as appropriate.

Comment on all omissions, qualifications and unsolicited statements appearing in the proposals. Review any special circumstances of the project. Ensure the Contractor's signature appears on all post bid review documents.

3. Substitutions:

Inquire about any potential substitutions being contemplated by the Contractor and advise them of the State's guidelines for the approval of substitutions and the documentation required. Review the deadline and advise the Contractor that partial submissions are not acceptable. Submission after the deadline may be rejected by the State.

PROJECT NO: A1138-00 DATE: March 6, 2012

Equal substitutions that are proposed by the Contractor that are of lesser value must have a credit change order attached with the submittal (See Article 4 of the General Conditions). The State has the right to reject the submission if there is no agreement on the proposed credit. Contractor will be responsible to submit a specified item.

4. Schedule:

Confirm that the Contractor is aware of the number of calendar days listed in the contract documents for the project duration and that the Contractor's bid includes compliance with the schedule duration and completion dates. Particular attention shall be given to special working conditions, long lead items and projected delivery dates, etc. Review project milestones (if applicable). This could give an indication of Contractor performance, but not allow a rejection of the bid.

Review the submittal timeframes per the Contract documents. Ask the Contractor to identify what products will take over twenty-eight (28) calendar days to deliver from the point of submittal approval.

5. Performance:

Investigate the past performance of Contractor by contacting Architects and owners (generally three of each) that were listed in their DPMC pre-qualification package and other references that may have been provided. Inquire how the Contractor performed with workmanship, schedule, project management, change orders, cooperation, paper work, etc.

6. Superintendent:

Remind the Contractor that a full-time non-working superintendent is required per the General Conditions, who must be responsible to address Contract issues. (Article 4.3.2.).

7. Letter of Recommendation:

The Consultant shall prepare a Letter of Recommendation for contract award to the Contractor submitting the low responsible bid within three (3) calendar days from the post bid review meeting. The document shall contain the project title, DPMC project number, bid due date and expiration date of the proposal. It shall include a detailed narrative describing each post bid meeting agenda item identified above and a recommendation to award the contract to the apparent low bid Contractor based on the information obtained during that meeting. Describe any acceptance or rejection of Alternate pricing and Unit pricing.

PROJECT NO: A1138-00 DATE: March 6, 2012

Comment on any discussion with the Contractor that provides a sense of their understanding of the project and any special difficulties that they see, and how they might approach those problems.

Attach all minutes of the Post bid meeting and any other relevant correspondence with the Letter of Recommendation and submit them to the Project Manager.

8. Conformed Drawings:

The Consultant shall prepare and distribute two (2) sets of drawings stamped "Conformed Drawings" to the Project Manager that reflect all Bulletins and/or required changes, additions, and deletions to the pertinent drawings within fourteen (14) calendar days of the construction contract award date.

Any changes made in Bulletins, meeting minutes, post bid review requirements shall also be reflected in the specification.

E. DIRECTOR'S HEARING

The Consultant must attend any Director's hearing(s) if a Contractor submits a bid protest. The Consultant shall be present to interpret the intent of the design documents and answer any technical questions that may result from the meeting. In cases where the bid protest is upheld, the Consultant shall submit a new "Letter of Recommendation" for contract award. The hours required to attend the potential hearings and to document the findings shall be estimated by the Consultant and the costs will be included in the base bid of their fee proposal.

F. CONSTRUCTION JOB MEETINGS, SCHEDULES, LOGS

The Consultant shall conduct all of the construction job meetings, to be held bi-weekly for the duration of construction, in accordance with the procedures identified in the A/E manual and those listed below.

1. Meetings:

The Consultant and Sub-Consultant(s) shall attend the pre-construction meeting and all construction job meetings during the construction phase of the project. The Consultant shall chair the meeting, transcribe and distribute the job-meeting minutes for every job meeting to all attendees and to those persons specified to be on the distribution list by the Project Manager. The Agenda for the meeting shall include, but not be limited to the items identified in the Procedures for Architects and Engineers Manual, Section 10.3.1, entitled "Agenda."

Also, the Consultant is responsible for the preparation and distribution of minutes within three (3) calendar days of the meeting. The format to be used for the minutes shall comply with those

PROJECT NO: A1138-00 DATE: March 6, 2012

identified in the "Procedures for Architects and Engineers Manual," Section 10.3.4, entitled, "Format of Minutes." All meeting minutes are to have an "action" column indicating the party that is responsible for the action indicated and a deadline to accomplish the assigned task. These tasks must be reviewed at each job progress meeting until it is completed and the completion date of each task shall be noted in the minutes of the meeting following the task completion.

2. Schedules:

The Consultant; with the input from the Client Agency Representative and Project Manager, shall review and recommend approval of the project construction schedule prepared by the Contractor. The schedule shall identify all necessary start and completion dates of construction, construction activities, submittal process activities, material deliveries and other milestones required to give a complete review of the project.

The Consultant shall record any schedule delays, the party responsible for the delay, the schedule activity affected, and the original and new date for reference.

The Consultant shall ensure that the Contractor provides a two (2) week "look ahead" construction schedule based upon the current monthly updated schedule as approved at the biweekly job meetings and that identifies the daily planned activities for that period. This Contractor requirement must also be included in Division 1 of the specification for reference.

3. Submittal Log:

The Consultant shall develop and implement a submittal log that will identify all of the required project submittals as identified in the design specification. The dates of submission shall be determined and approved by all affected parties during the pre-construction meeting.

Examples of the submissions to be reviewed and approved by the Consultant and Sub-Consultant (if required) include: shop drawings, change orders, Request for Information (RFI), equipment and material catalog cuts, spec sheets, product data sheets, MSDS material safety data sheets, specification procedures, color charts, material samples, mock-ups, etc. The submittal review process must be conducted at each job progress meeting and shall include the Consultant, Sub-Consultant, Contractor, Project Manager, and designated representatives of the Client Agency.

The Consultant shall provide an updated submittal log at each job meeting that highlights all of the required submissions that are behind schedule during the construction phase of the project.

G. CONSTRUCTION SITE ADMINISTRATION SERVICES

The Consultant and Sub-Consultant(s) shall provide construction site administration services during the duration of the project. The Consultant and Sub-Consultant(s) do not necessarily have

PROJECT NO: A1138-00 DATE: March 6, 2012

to be on site concurrently if there are no critical activities taking place that require the Sub-Consultant's participation.

The services required shall include, but not be limited to; field observations sufficient to verify the quality and progress of construction work, conformance and compliance with the contract documents, and to attend/chair meetings as may be required by the Project Manager to resolve special issues.

Consultant and Sub-Consultant(s) shall conduct weekly site inspection/field observation visits. Site inspection/field observation visits may be conducted in conjunction with regularly scheduled bi-weekly construction job meetings, depending on the progress of work, for weeks that construction job meetings are scheduled. The Consultant and their Sub-Consultant(s) shall submit a field observation report for each site inspection to the Project Manager. Also, they shall conduct inspections during major construction activities including, but not limited to the following examples: concrete pours, steel and truss installations, code inspections, final testing of systems, achievement of each major milestone required on the construction schedule, and requests from the Project Manager. The assignment of a full time on-site Sub-Consultant does not relieve the Consultant of their site visit obligation.

The Consultant shall refer to Section XIV. Contract Deliverables of this Scope of Work subsection entitled "Construction Phase" to determine the extent of services and deliverables required during this phase of the project.

H. SUB-CONSULTANT PARTICIPATION

It is the responsibility of the Consultant to ensure that they have provided adequate hours and/or time allotted in their technical proposal so that their Sub-Consultants may participate in all appropriate phases and activities of this project or whenever requested by the Project Manager. This includes the pre-proposal site visit and the various design meetings and construction job meetings, site visits, and close-out activities described in this Scope of Work. Field observation reports and/or meeting minutes are required to be submitted to the Project Manager within three (3) calendar days of the site visit or meeting. All costs associated with such services shall be included in the base bid of the Consultant's fee proposal.

I. DRAWINGS

1. Shop Drawings:

Each Contractor shall review the specifications and determine the numbers and nature of each shop drawing submittal. Five (5) sets of the documents shall be submitted with reference made to the appropriate section of the specification. The Consultant shall review the Contractor's shop drawing submissions for conformity with the construction documents within seven (7) calendar days of receipt. The Consultant shall return each shop drawing submittal stamped with the

PROJECT NO: A1138-00 DATE: March 6, 2012

appropriate action, i.e. "Approved", "Approved as Noted", "Approved as Noted Resubmit for Records", "Rejected", etc.

2. As-Built & Record Set Drawings:

The Contractor(s) shall keep the contract drawings up-to-date at all times during construction and upon completion of the project, submit their AS-BUILT drawings to the Consultant with the Contractor(s) certification as to the accuracy of the information prior to final payment. All AS-BUILT drawings submitted shall be entitled AS-BUILT above the title block and dated.

The Consultant shall review the Contractor(s)' AS-BUILT drawings at each job progress meeting to ensure that they are up-to-date. Any deficiencies shall be noted in the progress meeting minutes.

The Consultant shall acknowledge acceptance of the AS-BUILT drawings by signing a transmittal indicating they have reviewed them and that they reflect the AS-BUILT conditions as they exist.

Upon receipt of the AS-BUILT drawings from the Contractor(s), The Consultant shall obtain the original mylars from DPMC and transfer the AS-BUILT conditions to the original full sized signed mylars to reflect RECORD conditions within fourteen (14) calendar days of receipt of the AS-BUILT information.

The Consultant shall note the following statement on the original RECORD-SET drawings. "The AS-BUILT information added to this drawing(s) has been supplied by the Contractor(s). The (Architect) (Engineer) does not assume the responsibility for its accuracy other than conformity with the design concept and general adequacy of the AS-BUILT information to the best of the (Architect's) (Engineer's) knowledge."

Upon completion, The Consultant shall deliver the RECORD-SET original mylars to DPMC who will acknowledge their receipt in writing. This hard copy set of drawings and three (3) sets of current release AUTO CAD discs shall be submitted to DPMC and the discs shall contain all AS-BUILT drawings in both ".dwg" (native file format for AUTO CAD) and ".tif" (Tagged Image File) file formats.

J. CONSTRUCTION DEFICIENCY LIST

The Consultant shall prepare, maintain and continuously distribute an on-going deficiency list to the Contractor, Project Manager, and Client Agency Representative during the construction phase of the project. This list shall be separate correspondence from the field observation reports and shall not be considered as a punch list.

PROJECT NO: A1138-00 DATE: March 6, 2012

K. INSPECTIONS: SUBSTANTIAL & FINAL COMPLETION

The Consultant and their Sub-Consultant(s) accompanied by the Project Manager, Code Inspection Group, Client Agency Representative and Contractor shall conduct site inspections to determine the dates of substantial and final completion. The Project Manager will issue the only recognized official notice of substantial completion. The Consultant shall prepare and distribute the coordinated punch list, written warranties and other related DPMC forms and documents, supplied by the Contractor, to the Project Manager for review and certification of final contract acceptance.

If applicable, the punch list shall include a list of attic stock and spare parts.

L. CLOSE-OUT DOCUMENTS

The Consultant shall review all project close-out documents as submitted by the Contractors to ensure that they comply with the requirements listed in the "Procedure for Architects and Engineers' Manual." The Consultant shall forward the package to the Project Manager within fourteen (14) calendar days from the date the Certificate of Occupancy/Certificate of Approval is issued. The Consultant shall also submit a letter certifying that the project was completed in accordance with the contract documents, etc.

M. CLOSE-OUT ACTIVITY TIME

The Consultant shall provide all activities and deliverables associated with the "Close-Out Phase" of this project as part of their Lump Sum base bid. The Consultant and/or Sub-Consultant(s) may not use this time for additional job meetings or extended administrative services during the Construction Phase of the project.

N. TESTING, TRAINING, MANUALS AND ATTIC STOCK

The Consultant shall ensure that all equipment testing, training sessions and equipment manuals required for this project comply with the requirements identified below.

1. Testing:

All equipment and product testing conducted during the course of construction is the responsibility of the Contractor. However, the Consultant shall ensure the testing procedures comply with manufacturers recommendations. The Consultant shall review the final test reports and provide a written recommendation of the acceptance/rejection of the material, products or equipment tested within seven (7) calendar days of receipt of the report.

PROJECT NO: A1138-00 DATE: March 6, 2012

2. Training:

The Consultant shall include in the specification that the Contractor shall schedule and coordinate all equipment training with the Project Manager and Client Agency representatives. It shall state that the Contractor shall submit the Operation and Maintenance (O&M) manuals, training plan contents, and training durations to the Consultant, Project Manager and Client Agency Representative for review and approval prior to the training session.

All costs associated with the training sessions shall be borne by the Contractor installing the equipment. A signed letter shall be prepared stating when the training was completed and must be accompanied with the training session sign-in sheet as part of the project close-out package.

3. Operation & Maintenance Manuals:

The Consultant shall coordinate and review the preparation and issuance of the equipment manuals provided by the Contractor(s) ensuring that they contain the operating procedures, maintenance procedures and frequency, cut sheets, parts lists, warranties, guarantees, and detailed drawings for all equipment installed at the facility.

A troubleshooting guide shall be included that lists problems that may arise, possible causes with solutions, and criteria for deciding when equipment shall be repaired and when it must be replaced.

Include a list of the manufacturer's recommended spare parts for all equipment being supplied for this project.

The Consultant shall ensure that the training session is videotaped by the Contractor. A transmittal copy must be presented to the Project Manager who will forward the document to the Client Agency for future reference.

A list of names, addresses and telephone numbers of the Contractors involved in the installations and firms capable of performing services for each mechanical item shall be included. The content of the manuals shall be reviewed and approved by the Project Manager and Client Agency Representative.

The Consultant shall include in the specification that the Contractor must provide a minimum of ten (10) "throwaway" copies of the manual for use at the training seminar and seven (7) hardbound copies as part of the project close-out package.

4. Attic Stock:

PROJECT NO: A1138-00 DATE: March 6, 2012

The Consultant shall determine and recommend whether "attic stock" should be included for all aspects of the project. If required, the Consultant shall specify attic stock items to be included in the project.

Prior to project close-out, the Consultant must prepare a comprehensive listing of all items for delivery by the Contractor to the Owner and in accordance with the appropriate specification/plan section. Items shall include, but not be limited to: training sessions, O&M manuals, as-built drawings, itemized attic stock requirements, and manufacturer guarantees/warranties.

O. CHANGE ORDERS

The Consultant shall review and process all change orders in accordance with the contract documents and procedures described below.

1. Consultant:

The Consultant shall prepare a detailed request for Change Order including a detailed description of the change(s) along with appropriate drawings, specifications, and related documentation and submit the information to the Contractor for the change order request submission. This will require the use of the current DPMC 9b form.

2. Contractor:

The Contractor shall submit a DPMC 9b Change Order Request form to the Project Manager within seven (7) calendar days after receiving the Change Order from the Consultant. The document shall identify the changed work in a manner that will allow a clear understanding of the necessity for the change. Copies of the original design drawings, sketches, etc. and specification pages shall be highlighted to clarify and show entitlement to the Change Order.

Copies shall be provided of job minutes or correspondence with all relative information highlighted to show the origin of the Change Order. Supplementary drawings from the Consultant shall be included if applicable that indicate the manner to be used to complete the changed work. A detailed breakdown of all costs associated with the change, i.e. material, labor, equipment, overhead, Sub-Contractor work, profit and bond, and certification of increased bond shall be provided.

If the Change Order will impact the time of the project, the Contractor shall include a request for an extension of time. This request shall include a copy of the original approved project schedule and a proposed revised schedule that reflects the impact on the project completion date. Documentation to account for the added time requested shall be included to support entitlement of the request such as additional work, weather, other Contractors, etc. This documentation shall contain dates, weather data and all other relative information.

PROJECT NO: A1138-00 DATE: March 6, 2012

3. Recommendation for Award:

The Consultant shall evaluate the reason for the change in work and provide a detailed written recommendation for approval or disapproval of the Change Order Request including backup documentation of costs in CSI format and all other considerations to substantiate that decision.

4. Code Review:

The Consultant shall determine if the Change Order request will require Code review and shall submit six (6) sets of signed and sealed modified drawings and specifications to the DPMC Plan & Code Review Unit for approval, if required. The Consultant must also determine and produce a permit amendment request if required.

5. Cost Estimate:

The Consultant shall provide a detailed cost estimate of the proposed Change Order Request, as submitted by the Contractor, in CSI format (2004 Edition) for all appropriate divisions and subdivisions using a recognized estimating formula. The estimate shall then be compared with that of the Contractor's estimate. If any line item in the Consultant's estimate is lower than the corresponding line item in the Contractor's estimate, the Consultant in conjunction with the Project Manager is to contact the Contractor by telephone and negotiate the cost differences. The Consultant shall document the negotiated agreement on the Change Order Request form. If the Contractor's total dollar value changes based on the negotiations, the Consultant shall identify the changes on the Change Order Request form accordingly.

When recommending approval or disapproval of the change order, the Consultant shall be required to prepare and process a Change Order package that contains at a minimum the following documents:

- DPMC 9b Change Order Request
- DPMC 10 Consultant's Evaluation of Contractor's Change Order Request
- Consultant's Independent Detailed Cost Estimate
- Notes of Negotiations

6. Time Extension:

When a Change Order Request is submitted with both cost and time factors, the Consultant's independent cost estimate is to take into consideration time factors associated with the changed work. The Consultant is to compare their time element with that of the Contractor's time request and if there is a significant difference, the Consultant in conjunction with the Project Manager is to contact the Contractor by telephone and negotiate the difference.

PROJECT NO: A1138-00 DATE: March 6, 2012

When a Change Order Request is submitted for time only, the Consultant is to do an independent evaluation of the time extension request using a recognized scheduling formula.

Requests for extension of contract time must be done in accordance with the General Conditions Section 14.2.2.

7. Submission:

The Consultant shall complete all of the DPMC Change Order Request forms provided and submit a completed package to the Project Manager with all appropriate backup documentation within seven (7) calendar days from receipt of the Contractor's change order request. The Consultant shall resubmit the package at no cost to the State if the change order package contents are deemed insufficient by the Project Manager.

8. Meetings:

The Consultant shall attend and actively participate at all administrative hearings or settlement conferences as may be called by Project Manager in connection with such Change Orders and provide minutes of those meetings to the Project Manager for distribution.

9. Consultant Fee:

All costs associated with the potential Contractor Change Order Requests shall be anticipated by the Consultant and included in the base bid of their fee proposal.

If the Client Agency Representative requests a scope change; and it is approved by the Project Manager, the Consultant may be entitled to be reimbursed through an amendment and in accordance with the requirements stated in paragraph 10.01 of this Scope of Work.

IX. PERMITS & APPROVALS

A. REGULATORY AGENCY PERMITS

The Consultant shall comply with the following guidelines to ensure that all required permits, certificates, and approvals required by State regulatory agencies are obtained for this project.

1. NJ Uniform Construction Code Permit:

The Consultant shall complete the NJUCC permit application and all applicable technical sub-code sections with all technical site data listed. The Agent section of the application and certification section of the building sub-code section shall be signed. These documents shall be forwarded to the Project Manager who will send them to the Department of Community Affairs

PROJECT NO: A1138-00 DATE: March 6, 2012

(DCA) and all permit application costs will be paid by DPMC from encumbered funds for the project.

The Consultant may obtain access and copies of all NJUCC Building, Fire, Plumbing, Electrical and Elevator permit applications at the following website: www.nj.gov/dca/codes

The project construction documents must comply with the latest adopted edition of the NJ Uniform Construction Code that is in effect at the Final Design Phase of this project.

All other required project permits shall be obtained and paid for by the Consultant in accordance with the procedures described in paragraph 2. below.

2. Other Regulatory Agency Permits, Certificates, and Approvals:

The Consultant shall identify and obtain all other State Regulatory Agency permits, certificates, and approvals that will govern and affect the work described in this Scope of Work. An itemized list of these permits, certificates, and approvals shall be included with the Consultant's Technical Proposal and the total amount of the application fees should be entered in the Fee Proposal line item entitled, "Permit Fee Allowance." See Section XIV. 6.4.8 for a preliminary list of Regulatory Agency approvals.

The Consultant may refer to the Division of Property Management and Construction "Procedures for Architects and Engineers Manual", Section 6.4.8, which presents a compendium of State permits, certificates, and approvals that may be required for this project.

The Consultant shall determine the appropriate phase of the project to submit the permit application(s) in order to meet the approved project milestone dates.

Where reference to an established industry standard is made, it shall be understood to mean the most recent edition of the standard unless otherwise noted. If an industry standard is found to be revoked, or should the standard have undergone substantial change or revision from the time that the Scope of Work was developed, the Consultant shall comply with the most recent edition of the standard.

3. Prior Approval Certification Letters:

The issuance of a construction permit for this project may be contingent upon acquiring various prior approvals as defined by NJAC 5:23-1.4. It is the Consultant's responsibility to determine which prior approvals, if any, are required. The Consultant shall submit a general certification letter to the DPMC Plan & Code Review Unit Manager during the Permit Phase of this project that certifies all required prior approvals have been obtained.

PROJECT NO: A1138-00 DATE: March 6, 2012

In addition to the general certification letter discussed above, the following specific prior approval certification letters, where applicable, shall be submitted by the Consultant to the DPMC Plan & Code Review Unit Manager: Soil Erosion & Sediment Control, Water & Sewer Treatment Works Approval, Coastal Areas Facilities Review, Compliance of Underground Storage Tank Systems with NJAC 7:14 b, Pinelands Review, Compliance of Abandoned Wells with NJAC 7:9-9, Certification that all utilities have been disconnected from structures to be demolished, Board of Health Approval for Potable Water Wells, Health Department Approval for Septic Systems. It shall be noted that in accordance with NJAC 5:23-2.15(a)5, a permit cannot be issued until the letter(s) of certification is received.

B. BARRIER FREE REQUIREMENTS

The Consultant, in cooperation with the Client Agency Representative, shall assure that this project complies with the NJUCC Barrier Free Sub code where applicable.

C. STATE INSURANCE APPROVAL

The Consultant shall respond in writing to the FM Global Insurance Underwriter plan review comments through the DPMC Plan & Code Review Unit Manager as applicable. The Consultant shall review all the comments and modify the documents while adhering to the project's SOW requirements, State code requirements, schedule, budget, and Consultant fee.

D. PUBLIC EMPLOYEES OCCUPATIONAL SAFETY & HEALTH PROGRAM

A paragraph shall be included in the design documents, if applicable to this project that states: The Contractor shall comply with all the requirements stipulated in the Public Employees Occupational Safety & Health Program (PEOSHA) document, paragraph 12:100-13.5 entitled "Air quality during renovation and remodeling". The Contractor shall submit a plan demonstrating the measures to be utilized to confine the dust, debris, and air contaminants in the renovation or construction area of the project site to the Project Team prior to the start of construction.

The link to the document is: http://www.state.nj.us/health/eoh/peoshweb/iaqstd.pdf

E. MULTI-BUILDING OR MULTI-SITE PERMITS

A project that involves many buildings and/or sites requires that a separate permit shall be issued for each building or site. The Consultant must determine the construction cost estimate for *each* building and/or site location and submit that amount where indicated on the permit application.

PROJECT NO: A1138-00 DATE: March 6, 2012

F. PERMIT MEETINGS

The Consultant shall attend and chair all meetings with Permitting Agencies necessary to explain and obtain the required permits.

G. MANDATORY NOTIFICATIONS

The Consultant shall include language in Division 1 of the specification that states the Contractor shall assure compliance with the New Jersey "One Call" Program (1-800-272-1000) if any excavation is to occur at the project site.

The One Call Program is known as the New Jersey Underground Facility Protection Act, N.J.S.A. 48:2-73 through N.J.S.A. 48:2-91, and N.J.A.C. 14:2-1.1 through N.J.A.C. 14:2-6.4.

H. CONSTRUCTION TRAILER PERMITS

If construction trailers are required for the project then the Consultant shall include language in the Supplemental General Conditions that states the Contractor(s) shall be responsible to obtain and pay for each construction trailer permit directly from the Department of Community Affairs. (General Contractor for Single Bid-Lump Sum All Trades contract, and each Contractor for Separate Bids & Single Bid contract).

DCA will allow a single permit application to cover more than one trailer per Contractor provided the building, plumbing, and electrical technical sub-code sections, as applicable, specify the correct numbers and costs. The trailers will not require a plan review.

DCA will inspect each construction trailer and issue a Certificate of Occupancy (CO) separate from the main building construction.

Storage trailers with no utility connections are exempt from this requirement.

I. SPECIAL INSPECTIONS

In accordance with the requirements of the New Jersey Uniform Construction Code, Bulletin 03-5 and as clarified further by the Department of Community Affairs, the Consultant shall be responsible for the coordination of all special inspections during the construction phase of the project.

1. Definition:

Special inspections are defined as an independent verification by a qualified person (special Inspector) rendered to the code official for **Class I buildings only**. The special inspector is to be

PROJECT NO: A1138-00 DATE: March 6, 2012

independent from the Contractor and responsible to the building owner or owner's agent so that there is no possible conflict of interest.

2. Responsibilities:

The Consultant shall submit with the permit application, a list of special inspections and the firm(s) that will be responsible to carry out the inspections required for the project. The list shall be a separate document, on letter head, signed and sealed.

3. Special Inspections:

The following special inspections, as applicable to this project, shall be performed in accordance with Chapter 17 of the International Building Code, New Jersey Edition, as defined below.

- Steel construction, in accordance with Section 1704.3.
- Concrete construction, in accordance with Section 1704.4.
- Masonry construction, in accordance with Section 1704.5.
- Soils, in accordance with Section 1704.7.
- Pile foundations, in accordance with Section 1704.8.
- Seismic resistance for Design Category D buildings, in accordance with Section 1707.
- Structural testing for isolation damping systems in seismic Design Category D buildings, in accordance with Section 1708.
- A quality assurance plan for seismic resistance of seismic Design Category D buildings, in accordance with Sections 1705.1 and 1705.2.

Special inspectors shall be licensed in accordance with the requirements in the New Jersey Uniform Construction Code.

X. GENERAL REQUIREMENTS

A. SCOPE CHANGES

The Consultant must request any changes to this Scope of Work in writing. An approved DPMC 9d Consultant Amendment Request form reflecting authorized scope changes must be received by the Consultant prior to undertaking any additional work. The DPMC 9d form must be approved and signed by the Director of DPMC and written authorization issued from the Project Manager prior to any work being performed by the Consultant. Any work performed without the executed DPMC 9d form is done at the Consultant's own financial risk.

PROJECT NO: A1138-00 DATE: March 6, 2012

B. ERRORS AND OMISSIONS

The errors and omissions curve and the corresponding sections of the "Procedures for Architects and Engineers Manual" are eliminated. All claims for errors and omissions will be pursued by the State on an individual basis. The State will review each error or omission with the Consultant and determine the actual amount of damages, if any, resulting from each negligent act, error or omission.

C. ENERGY INCENTIVE PROGRAM

The Consultant shall review the programs described on the "New Jersey's Clean Energy Program" website at: http://www.njcleanenergy.com to determine if any proposed upgrades to the mechanical and/or electrical equipment and systems for this project qualify for "New Jersey Clean Energy Program" rebates and incentives such as SmartStart, Pay4Performance, Direct Install or any other incentives.

The Consultant shall be responsible to complete the appropriate registration forms and applications, provide any applicable worksheets, manufacturer's specification sheets, calculations, attend meetings, and participate in all activities with designated representatives of the programs and utility companies to obtain the entitled financial incentives and rebates for this project. All costs associated with this work shall be estimated by the Consultant and the amount included in the base bid of their fee proposal.

D. AIR POLLUTION FROM ARCHITECTURAL COATINGS

The Consultant shall include in the appropriate sections of the specification the requirement that all architectural coatings applied at the project site shall comply with the NJDEP Administrative Code Title 7, Chapter 27, Subchapter 23, entitled "Prevention of Air Pollution from Architectural Coatings".

Architectural coatings shall mean materials applied for protective, decorative, or functional purposes to stationary structures or their appurtenances, portable buildings, pavements, or curbs. The coating materials include, but are not limited to, paints, varnishes, sealers, and stains.

XI. ALLOWANCES

A. PERMIT FEE ALLOWANCE

The Consultant shall obtain and pay for all of the project permits in accordance with the guidelines identified below.

PROJECT NO: A1138-00 DATE: March 6, 2012

1. Permits:

The Consultant shall determine the various State permits, certificates, and approvals required to complete this project.

2. Permit Costs:

The Consultant shall determine the application fee costs for all of the required project permits, certificates, and approvals (excluding the NJ Uniform Construction Code permit) and include that amount in their fee proposal line item entitled "Permit Fee Allowance". A breakdown of each permit and application fee shall be attached to the fee proposal for reference.

NOTE: The NJ Uniform Construction Code permit is excluded since it is obtained and paid for by DPMC.

3. Applications:

The Consultant shall fill out and submit all permit applications to the appropriate permitting authorities and the costs shall be paid from the Consultant's permit fee allowance provided. A copy of the application(s) and the original permit(s) obtained by the Consultant shall be given to the Project Manager for distribution during construction.

4. Consultant Fee:

The Consultant shall determine what is required to complete and submit the permit applications, obtain supporting documentation, attend meetings, etc., and include the total cost in the base bid of their fee proposal under the "Permit Phase" column.

Any funds remaining in the permit allowance account will be returned to the State at the close of the project.

XII.SUBMITTAL REQUIREMENTS

A. CONTRACT DELIVERABLES

All submissions shall include the Contract Deliverables identified in Section XIV of this Scope of Work and described in the DPMC Procedures for Architects and Engineers Manual.

PROJECT NO: A1138-00 DATE: March 6, 2012

B. CATALOG CUTS

The Consultant shall provide catalog cuts as required by the DPMC Plan & Code Review Unit during the design document review submissions. Examples of catalog cuts include, but are not limited to: mechanical equipment, hardware devices, plumbing fixtures, fire suppression and alarm components, specialized building materials, electrical devices, etc.

C. PROJECT DOCUMENT BOOKLET

The Consultant shall submit all of the required Contract Deliverables to the Project Manager at the completion of each phase of the project. All reports, meeting minutes, plan review comments, project schedule, cost estimate in CSI format (2004 Edition), correspondence, calculations, and other appropriate items identified on the Submission Checklist form provided in the A/E Manual shall be presented in an 8½" x 11" bound "booklet" format.

D. DESIGN DOCUMENT CHANGES

Any corrections, additions, or omissions made to the submitted drawings and specifications at the Permit Phase of the project must be submitted to DPMC Plan & Code Review Unit as a complete document. Corrected pages or drawings may not be submitted separately unless the Consultant inserts the changed page or drawing in the original documents. No Addendums or Bulletins will be accepted as a substitution to the original specification page or drawing.

E. SINGLE-PRIME CONTRACT

All references to "separate contracts" in the Procedures for Architects and Engineers Manual, Chapter 8, shall be deleted since this project will be advertised as a "Single Bid" (Lump Sum All Trades) contract. The single prime Contractor will be responsible for all work identified in the drawings and specifications.

The drawings shall have the required prefix designations and the specification sections shall have the color codes as specified for each trade in the DPMC Procedure for Architects and Engineers Manual.

The Consultant must still develop the Construction Cost Estimate (CCE) for each trade and the amount shall be included on the DPMC-38 Project Cost Analysis form where indicated. This document shall be submitted at each design phase of the project and updated immediately prior to the advertisement to bid.

PROJECT NAME: Window Wall Curb and Parking Garage Repair

PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 DATE: March 6, 2012

XIII. SOW SIGNATURE APPROVAL SHEET

This Scope of Work shall not be considered a valid document unless all signatures appear in each designated area below.

The Client Agency approval signature on this page indicates that they have reviewed the design criteria and construction schedule described in this project Scope of Work and verifies that the work will not conflict with the existing or future construction activities of other projects at the site.

SOW PREPARED BY: James W. Wright	3/6/12
JAMES WRIGHT, PROJECT MANAGER DPMC PROJECT PLANNING & INITIATION	DATE
SOW APPROVED BY: JAMES MCKENNA, MANAGER DRMC PROJECT PLANNING & INITIATION	3/6/12 DATE
SOW APPROVED BY: James 3/2 GARY KARR, ASSISTANT DEPUTY DIRECTOR DPMC BUILDING MANAGEMENT & OPERA	
SOW APPROVED BY: 2 Cond 3 /8 EUGENE CARDONE, PROJECT MANAGER DPMC PROJECT MANAGEMENT GROUP	D/12 DATE
SOW APPROVED BY: RICHARD FLODMAND, DEPUTY DIRECTOR	3/12/12 DATE

DIV PROPERTY MGT & CONSTRUCTION

PROJECT NO: A1138-00 DATE: March 6, 2012

XIV.CONTRACT DELIVERABLES

The following is a listing of Contract Deliverables that are required at the completion of each phase of this project. The Consultant shall refer to the DPMC publication entitled, "Procedures for Architects and Engineers," Volumes I and II, 2nd Edition, dated January, 1991 to obtain a more detailed description of the deliverables required for each item listed below.

The numbering system used in this "Contract Deliverables" section of the scope of work corresponds to the numbering system used in the "Procedures for Architects and Engineers" manual and some may have been deleted if they do not apply to this project.

DESIGN DEVELOPMENT PHASE: 50% Complete Design Documents (Minimum)

- 7.1 Project Schedule (Update Bar Chart Schedule)
- 7.2 Meetings & Minutes (Minutes within 5 working days of meeting)
- 7.3 Correspondence
- 7.4 Submission Requirements
 - 7.4.1 A/E Statement of Site Visit, As-Built Drawing Verification (if available)
 - 7.4.2 Space Analysis & Program Requirements
 - 7.4.3 Special Features Description: special structural features, etc.
 - 7.4.4 Site Evaluation
 - 7.4.7 Design Rendering/Sketches
 - 7.4.8 Regulatory Agency Approvals
 - 7.4.10 Drawings: 6 sets

Cover Sheet (See A/E Manual for format)

Site Plan

Elevations

Sections/Details

Structural Drawings, Seismic Design Load Criteria

- 7.4.11 Specifications: 6 sets (See A/E Manual for format, include Division 1 and edit to describe the administrative and general requirements of the project)
- 7.4.12 Current Working Estimate in CSI Format & Cost Analysis 38 Form
- 7.4.13 Bar Chart of Design and Construction Schedule
- 7.4.14 Oral Presentation of Submission to Project Team
- 7.4.15 SOW Compliance Statement
- 7.4.16 This Submission Checklist (See A/E Manual, Figure 6.4.16 for format)
- 7.4.17 Deliverables Submission in Booklet Form: 7 sets

PROJECT NAME: Window Wall Curb and Parking Garage Repair

PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 DATE: March 6, 2012

7.5 Approval

7.5.1 Respond to Submission Comments

7.6 Submission Forms

- Figure 7.4.12 Current Working Estimate/Cost Analysis
- Figure 7.4.16 Submission Checklist

FINAL DESIGN PHASE 100% Complete Construction Documents

This Final Design Phase may require more than one submission based on the technical quality and code conformance of the design documents.

- 8.1 Schedule (Update Bar Chart Schedule)
- 8.2 Meeting & Minutes (Minutes within 5 working days of meeting)
- 8.3 Correspondence
- 8.4 Submission Requirements
 - 8.4.1 A/E Statement of Site Visit
 - 8.4.2 Space Analysis
 - 8.4.3 Special Features Description: special structural features, etc.
 - 8.4.4 Site Evaluation
 - 8.4.7 Photographs
 - 8.4.8 Regulatory Agency Approvals (Include itemized list specific to this project)
 - 8.4.10 Drawings: 6 sets
 - 8.4.11 Specifications: 6 sets
 - 8.4.12 Current Working Estimate in CSI Format & Cost Analysis 38 Form
 - 8.4.13 Bar Chart of Design and Construction Schedule
 - 8.4.14 Oral Presentation of this Submission to Project Team
 - 8.4.15 Plan Review/SOW Compliance Statement
 - 8.4.16 This Submission Checklist
 - 8.4.17 Deliverables Submission in Booklet Form: 7 sets

8.5 Approvals

8.5.1 Respond to Submission Comments

PERMIT APPLICATION PHASE

PROJECT NAME: Window Wall Curb and Parking Garage Repair PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 DATE: March 6, 2012

This Permit Application Phase should not include any additional design issues. Design documents shall be 100% complete at the Final Design Phase.

8.6 Permit Application Submission Requirements

- 8.6.1 8.6.7: If all of the deliverables of these sections have been previously submitted to DPMC and approved there are no further deliverables due at this time
- 8.6.8 Regulatory Agency Approvals
 - (a) UCC Permit Application & Technical Sub-codes completed by A/E
- 8.6.9 Utility Availability Confirmation
- 8.6.10 Signed and Sealed Drawings: 6 sets
- 8.6.11 Signed and Sealed Specifications: 6 sets
- 8.6.12 Current Working Estimate/Cost Analysis
- 8.6.13 Bar Chart Schedule
- 8.6.14 Project Presentation (N/A this Project)
- 8.6.15 Plan Review/SOW Compliance Statement
- 8/6.16 Submission Checklist

8.7 Approvals

8.8 Submission Forms

Figure 8.4.12	Current Working Estimate/Cost Analysis
Figure 8.4.16	Submission Checklist (Final Review Phase)
Figure 8.6.12-b	Bid Proposal Form (Form DPMC -3)
Figure 8.6.12-c	Notice of Advertising (Form DPMC -31)
Figure 8.6.16	Submission Checklist (Permit Phase)
Figure 8.7	Bid Clearance Form (Form DPMC -601)

BIDDING AND CONTRACT AWARD

9.0 Bidding Phase Requirements

- 9.0.1 Original Drawings signed & sealed by A/E, one (1) set AUTOCAD Discs
- 9.02 One Unbound Specification Color Coded per A/E Manual Section 8.4.11
- 9.03 Bid Documents Checklist
- 9.04 Bid Proposal Form
- 9.05 Notice for Advertising

9.1 Chair Pre-Bid Conference/Mandatory Site Visit

9.2 Prepare Bulletins

PROJECT NAME: Window Wall Curb and Parking Garage Repair

PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 DATE: March 6, 2012

9.3	Attend	Bid	\mathbf{O}_{1}	pening

- 9.4 **Recommendation for Contract Award**
 - 9.4.1 Prepare Letter of Recommendation for Award & Cost Analysis
- 9.5 **Attend Pre-Construction Meeting**
- 9.6 **Submission Checklist**
- 9.7 **Submission Forms**

Figure 9.4.1 Cost Analysis

Submission Checklist Figure 9.6

CONSTRUCTION PHASE

- 10.1 **Site Construction Administration**
- 10.2 **Pre-Construction Meeting**
- 10.3 **Construction Job Meetings**
 - 10.3.1 Agenda: Schedule and Chair Construction Job Meetings
 - Minutes: Prepare and Distribute Minutes within 5 working days of meeting 10.3.2
 - 10.3.3 Schedules; Approve Contractors' Schedule & Update
 - Minutes Format: Prepare Job Meeting Minutes in approved format, figure 10.3.4 10.3.4-a
- 10.4 Correspondence
- 10.5 **Prepare and Deliver Conformed Drawings**
- 10.7 **Approve Contractors Invoicing and Payment Process**
- 10.8 Approve Contractors 12/13 Form for Subs, Samples and Materials
- 10.10 Approve Test Reports
- 10.11 Approve Shop Drawings
- 10.12 Construction Progress Schedule

PROJECT NAME: Window Wall Curb and Parking Garage Repair

PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 **DATE: March 6, 2012**

10.12.1 Construction Progress Schedule

10.13 Review & Recommend or Reject Change Orders

- 10.13.1 Scope Changes
- 10.13.2 Construction Change Orders
- 10.13.3 Field Changes

10.14 Construction Photographs

10.15 Submit Field Observation Reports

10.16 Submission Forms

Figure 10.3.4-a	Job Meeting Format of Minutes
Figure 10.3.4-b	Field Report
Figure 10.6	DPMC Insurance Form-24
Figure 10.6-a	Unit Schedule Breakdown
Figure 10.6-b	Monthly Estimate for Payment to Contractor DPMC 11-2
Figure 10.6-c	Monthly Estimate for Payment to Contractor DPMC 11-2A
Figure 10.6-d	Invoice DPMC 11
Figure 10.6-e	Prime Contractor Summary of Stored Materials DPMC 11-3
Figure 10.6-f	Agreement & Bill of Sale certificate for Stored Materials DPMC 3A
Figure 10.7-a	Approval Form for Subs, Samples & Materials DPMC 12
Figure 10.7-b	Request for Change Order DPMC 9b
Figure 10.9	Transmittal Form DPMC 13
Figure 10.10	Submission Checklist

PROJECT CLOSE-OUT PHASE

- 11.1 Responsibilities: Plan, Schedule and Execute Close-Out Activities
- 11.2 Commencement: Initiate Close-Out w/DPMC 20A Project Close-Out Form
- 11.3 **Develop Punch List & Inspection Reports**
- 11.4 **Verify Correction of Punch List Items**
- 11.5 **Determination of Substantial Completion**
- Ensure Issuance of "Temporary Certificate of Occupancy or Approval" 11.6

PROJECT NAME: Window Wall Curb and Parking Garage Repair PROJECT LOCATION: Motor Vehicle Commission Building

PROJECT NO: A1138-00 DATE: March 6, 2012

11.7 Initiation of Final Contract Acceptance Process

11.8 Submission of Close-Out Documentation

- 11.8.1 As-Built & Record Set Drawings, 3 sets AUTOCAD Discs Delivered to DPMC
- 11.8.2 (a) Maintenance and Operating manuals, Warranties, etc.: 7 sets each
 - (b) Guarantees
 - (c) Shop Drawings
 - (d) Letter of Contract Performance
- 11.8.3 Final Cost Analysis-Insurance Transfer DPMC 25
- 11.8.4 This Submission Checklist

11.9 Final Payment

- 11.9.1 Contractors Final Payment
- 11.9.2 A/E Invoice and Close-Out Forms for Final Payment

11.10 Final Performance Evaluation of the A/E and the Contractors

11.11 Ensure Issuance of a "Certificate of Occupancy or Approval"

11.12 Submission Forms

Figure 11.2	Project Close-Out Documentation List DPMC 20A
Figure 11.3-a	Certificate of Substantial Completion DPMC 20D
Figure 11.3-b	Final Acceptance of Consultant Contract DPMC 20C
Figure 11.5	Request for Contract Transition Close-Out DPMC 20X
Figure 11.7	Final Contract Acceptance Form DPMC 20
Figure 11.8.3-a	Final Cost Analysis
Figure 11.8.3-b	Insurance Transfer Form DPMC 25
Figure 11 8 4	Submission Checklist

XV.EXHIBITS

The attached exhibits in this section will include a sample project schedule, and any supporting documentation to assist the Consultant in the design of the project such as maps, drawings, photographs, floor plans, studies, reports, etc.

END OF SCOPE OF WORK

February 7, 1997 **Rev.**: January 29, 2002

Responsible Group Code Table


The codes below are used in the schedule field "GRP" that identifies the group responsible for the activity. The table consists of groups in the Division of Property Management & Construction (DPMC), as well as groups outside of the DPMC that have responsibility for specific activities on a project that could delay the project if not completed in the time specified. For reporting purposes, the groups within the DPMC have been defined to the supervisory level of management (i.e., third level of management, the level below the Associate Director) to identify the "functional group" responsible for the activity.

CODE	DESCRIPTION	REPORTS TO ASSOCIATE DIRECTOR OF:
CM	Contract Management Group	Contract Management
CA	Client Agency	N/A
CSP	Consultant Selection and Prequalification Group	Technical Services
A/E	Architect/Engineer	N/A
PR	Plan Review Group	Technical Services
CP	Construction Procurement	Planning & Administration
CON	Construction Contractor	N/A
FM	Financial Management Group	Planning & Administration
OEU	Office of Energy and Utility Management	N/A
PD	Project Development Group	Planning & Administration

		KSDD	
<pro.j></pro.j>	< <u>{</u> '(
Design			
CV3001	Schedule/Conduct Predesign/Project Kick-Off Mtg.	Ю	
CV3020	Prepare Program Phase Submittal	AB	
CV3021	Distribute Program Submittal for Review	8	
CV3027	Prepare & Submit Project Cost Analysis (DPMC-38)	8	
CV3022	Review & Approve Program Submittal	8	
CV3023	Review & Approve Program Submittal	28	
CV3024	Review & Approve Program Submittal	ď	
CV3025	Consolidate & Return Program Submittal Comments	COV	
CV3030	Prepare Schematic Phase Submittal	AB	
CV3031	Distribute Schematic Submittal for Review	ď	
CV3037	Prepare & Submit Project Cost Analysis (DPMC-38)	CM	
CV3032	Review & Approve Schematic Submittal	\$	
CV3033	Review & Approve Schematic Submittal	8	
CV3034	Review & Approve Schematic Submittal	8	
CV303S	Consolidate & Return Schematic Submittal Comment	8	
CV3040	Prepare Design Development Phase Submittal	AE	
CV3041	Distribute D. D. Submittal for Review	8	
CV3047	Prepare & Submit Project Cost Analysis (DPMC-38)	8	
CV3042	Review & Approve Design Development Submittal	8	
CV3043	Review & Approve Design Development Submittal	8	
CV3044	Review & Approve Design Development Submittal	CM	
CV304S	Consolidate & Return D.D. Submittal Comments	8	
CV3050	Prepare Final Design Phase Submittal	AE	
	Distribute Final Design Submittal for Review	8	
	Review & Approve Final Design Submittal	ঠ	
	Review & Approve Final Design Submittal	PR	
CV3054	Review Final Design Submitl for Constructability	800	
NOTE:		DBCA-TEST	
Refe Scop	Refer to section "IV Project Schedule" of the Scope of Work for contract phase durations.	Bureau of De	Sheet 1 of 3
		Koutine Project	

CV3055 Benjam & American	Reput International and intern	
7		THE PROPERTY.
Consolidate & Return Final Design Comments	8	
CV3060 Prepare & Submit Permit Application Documents	V	
CV3068 Prepare & Submit Bidding Cost Analysis (DPMC-38)	CA.	
Plan Review-Permit Acquisition		
CV4001 Review Constr. Documents & Secure UCC Permit	84	
	8	
CV4020 Secure Bid Clearance	8	
Advertise-Bid-Award		
V5001 Advertise Project & Bid Construction Contracts	ච්	
CV3010 Open Construction Bids	රී	
CV5011 Evaluate Bids & Prep. Recommendation for Award	8	-,
CV5012 Evaluate Bids & Prep. Recommendation for Award	V	
CV3014 Complete Recommendation for Award	8	
CV3020 Award Construction Contracts/Issue NTP	ď	
Construction		
CV6000 Project Construction Star/Issue NTP	O	1 1 2 2 3 4
Cv6001 Contract Start/Contract Work (25%) Complete	Noo	
CV6002 Preconstruction Meeting	8	
CV6003 Begin Preconstruction Submittals	NOO N	
Cv6004 Longest Lead Procurement Item Ordered	NOO	
Cv6005 Lead Time for Longest Lead Procurement Item	NOO	
CV6006 Prepare & Submit Shop Drawings	NOO	21 2
Cv6007 Complete Construction Submittals	NOO	
CW6011 Roughing Work Start	NOO	
CV6012 Perform Roughing Work	NO	
CV6010 Contract Work (50%+) Complete	CON	
CW013 Longest Lead Procurement Item Delivered	COM	
Cv6020 Contract Work (75%) Complete	NOO	
NOTE		
Refer to section "IV Project Schedule" of the Scope of Work for contract phase durations.	Bureau of Design & Construction Services	
	Konting Project	•

CV6022 Interior Finishes Start CON CV6039 Contract Work to Substantial Completion CV6039 Contract Work to Substantial Completion CV6039 Contract Work to Substantial Completion CV6037 Complete Deferred Punch List/Seasonal Activities CV6037 Complete Deferred Punch List/Seasonal Activities CV6039 Close Out Construction Complete CV6039 Close Out ALE Contracts Complete CV6039 Close Out ALE Contract CV6039 Close Out ALE Contract CV6039 Project Completion Declared CV6039 Project Completion Declared CV6039 Project Completion Declared CV6030 Project Completion Declared CV6030 Project Completion Declared		
Install Interior Finishes Contract Work to Substantial Completion Substantial Completion Declared Complete Deferred Punch Liss/Seasonal Activities Complete Deferred Punch Liss/Seasonal Activities Complete Deferred Complete Close Out Construction Contracts Close Out Construction Complete Close Out Construction Declared Close Out Construction Declared Close Out Completion Declared Close Out Completion Declared Close Out Completion Declared COM COM COM COM COM COM COM CO		
Install Interior Finishes CON		
Contract Work to Substantial Completion Substantial Completion Declared Complete Deferred Punch List/Seasonal Activities Complete Deferred Punch List/Seasonal Activities Charter Construction Complete Close Out Construction Complete Construction Contracts Complete Construction Contracts Construction Declared Close Out A/B Contract CAM Project Completion Declared CAM		
Substantial Completion Declared Complete Deferred Punch List/Seasonal Activities Construction Complete Close Out Construction Complete Close Out Construction Complete Close Out Construction Declared Close Out A/B Contract CM Project Completion Declared CM Project Completion Declared CM		
Complete Deferred Punch List/Seasonal Activities CON Project Construction Complete Chastruction Contracts Construction Contracts Complete CM Close Out A/B Contract Close Out A/B Contract Close Out A/B Contract Close Out Conspletion Declared CM		
Project Construction Complete Close Out Construction Complete Construction Contracts Complete Close Out A/B Contract Project Completion Declared CM		
Close Out Construction Contracts Construction Contracts Complete Close Out A/B Contract Project Completion Declared CM CM Project Completion Contract CM CM CM CM		
Construction Contracts Complete CM Close Out A/E Contract CM Project Completion Declared CM		
Close Out A/B Contract Project Completion Declared CM		
Project Completion Declared CM		
NOTE: Refer to section "IV Project Schedule" of the Scope of Work for contract phase durations.	tion Services	Sheet 3 of 3
	Routine Project	Exhibit "A"

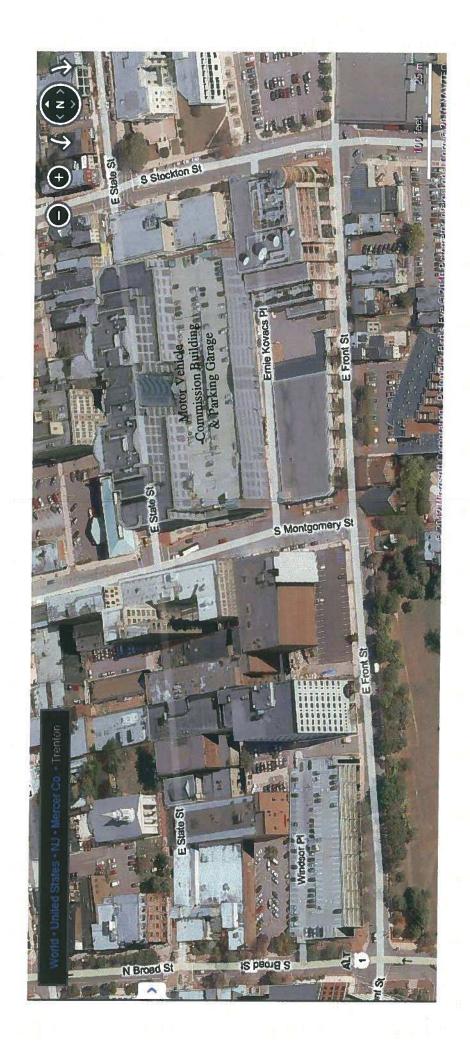

Motor Vehicle Commission Building **EXHIBIT 'B'**





Underside of 6th Level Parking Garage Sealant Joint **EXHIBIT 'C'**





View of 5th Level of Parking Garage **EXHIBIT 'C'**

February 16, 2009

Mr. Gary M. Karr Assistant Manager State of New Jersey Treasury DPMC Office of Building Management and Operations PO Box 038 Trenton, NJ 08625

re: Exterior Window Wall Curb Study with Miscellaneous Parking Garage Conditions Evaluation Motor Vehicles Commission Building 225 East State Street

Trenton, New Jersey NJDPMC Work Order No. 17 (JBCI Project No. 08-3858)

Dear Mr. Karr.

Per Work Order No. 17, we are submitting our condition survey of the exterior window wall along the north elevation of the above referenced building. In addition, we investigated the reported masonry distress at the west pier of the main entrance, as well as concrete foundation wall distress and water intrusion in the basement and sub-basement parking levels. The report is intended to evaluate the existing conditions in these areas and provide sufficient information to allow the State of New Jersey to make prudent decisions regarding future repairs and maintenance. Our report is based on a site visit on January 6, 2008 and a field survey with exploratory probes performed on January 17, 2008, as well as original architectural and structural drawings by Rothe-Johnson Associates.

Our survey consisted of obtaining field data and photographs, reviewing available drawings, and localized test probes to determine the sources of distress and verify the existing construction. We were assisted in our investigation by specialty contractor Datum Restoration, Inc., Lansdowne, PA.

DESCRIPTION

The Motor Vehicle Commission Building was designed in 1990 by Rothe-Johnson Associates, Architect, and Severud Associates, Structural Engineer. The building is a 9-story steel-framed structure with 2 below-grade parking levels. The main entrance is located in the center of the building along East State Street (see Photo 1). The ground-floor along the East State Street elevation consists of the main atrium lobby and vestibule, as well as some retail and other small businesses (see Photo 2).

North Elevation

The ground floor window wall along East State Street is set back approximately 2'-6" from the face of the masonry-clad exterior columns and 2'-0" from the signage and building face above. A small area of concrete sidewalk fills the area between the exterior columns in most locations, while at the main entrance and at the east and west ends of the building, brick paving fills these areas. The window wall construction primarily consists of aluminum-framed windows sitting above cast stone "curbs" of varying heights. The curbs are eliminated at doorways, and an aluminum door threshold is set at sidewalk level.

Mr. Gary M. Karr Page 2 February 16, 2009

The main entranceway along East State Street consists of a centered revolving door with a swinging double door on each side. The piers that flank either side of the main entrance consist of masonry cladding encasing the structural steel column. The cladding varies from cast stone at the base to sections of red and white brick at mid-height, and returns to cast stone above the brick.

Parking Levels

The exposed foundation wall system in the below-grade parking levels utilizes 12" thick reinforced concrete walls on 1'-8" wide x 1'-0" thick footings between the perimeter column footings. Wall construction joints are spaced at 30'-0", centered between the concrete-encased perimeter columns. Concrete encasement is provided as fire protection on all columns in the parking levels.

SUMMARY OF FINDINGS

Window Wall

Some of the cast stone "curbs" below the aluminum window frame exhibit uneven movement along their length (see Photo 3). This movement is most evident at the tall curbs along the window wall to the west of the main entrance. Two exploratory probes were completed to expose the conditions below the cast stone curbs.

Probe #1

The first probe was completed at a tall (9"±) curb at the location of most severe movement, one bay west of the main entrance, in front of the main atrium lobby window wall (see Photos 4-6). This probe revealed that metal shims were originally used to set and level some of the cast stone curbs on top of the foundation walls below. The exposed metal shims were located at the end of the curb section and exhibited severe corrosion. The corrosion caused the stack of shims to expand, forcing the curb upward. This upward movement caused slight deformation of the aluminum window frame above. The adjacent section of cast stone curb was not set on metal shims, and therefore did not get pushed up, resulting in the uneven appearance at the curb joints. We also noted a notch in the bottom of the cast stone curb along its length. A short piece of corroded vertical reinforcing bar was found extending out from the top of the foundation wall below. This bar was designed to fit inside the notch and align the cast stones during original installation. Due to the corrosion of the shims and subsequent lifting of the curb, the bar is no longer engaged (see Photo 5).

Probe #2

The second probe was completed 2 bays west of the first probe, in front of a business called "Renaissance Grill". The curbs at this location are very short, with an exposed height of only about 2½" (See Photos 7 & 8). This probe revealed that the short curbs were set on preformed expansion joint material on top of the foundation wall below. In this particular location, the top of the foundation wall was very close to the sidewalk surface. A top wall reinforcing bar was exposed about 1" below the top of the existing sidewalk surface. One of the curb sections in front of "Renaissance Grill" exhibited minor vertical displacement at a vertical joint.

A 2-foot level was placed on the window sill at both probe locations revealing the abovementioned window frame deformation at Probe #1. The window frame at Probe #2 appeared level and showed no signs of distress.

Mr. Gary M. Karr Page 3 February 16, 2009

Entrance Pier

Cracked and displaced brick was observed on the masonry-clad pier on the west side of the main entrance (see Photos 9 & 10). A ladder was used to obtain a close up view of the distress, which is concentrated on the west side of the top band of red brick cladding. The most sever cracking is located at the northeast and southeast corners of the brick cladding, with some minor cracking and signs of water intrusion on the east face of the brick. There is evidence of an unsuccessful past repair attempt at the southeast corner.

The pier on the east side of the entrance did not exhibit any signs of distress.

Parking Levels

There is evidence of water intrusion at 2 locations along the north (East State Street) foundation wall of the building. Water, efflorescence, and some puddling were observed on the wall and floor surface on the Basement level (see Photos 11 & 12). Water is evident at two vertical joints, one between column lines 6 & 7, and the other between column lines 8 & 9. These joints are located approximately 150' and 210' respectively from the west foundation wall.

Upon review, the original structural drawing S20 by Severud Associates, Consulting Engineers P.C., dated August 14, 1990, confirmed that the foundation wall construction joints are located "midway between column centerlines," matching the locations where leaking was observed. The original construction joint detail calls for a continuous waterstop in the center of the wall over the height of the construction joints.

An additional area of distress was observed in the Sub-Basement level. The concrete encasement on Column C5, near the northwest corner of the building, shows significant cracking and signs of detaching from the W14 column inside. There is rust staining on the concrete over the height of the column and on the fireproofing applied to the beams and wind bracing framing into the top of the column. Water staining is clearly evident on the fireproofing as well (see Photo 13).

Next, we observed column C5 on the floor above, the Basement level parking area. There were no signs of significant cracking or rust at this level. There were, however, 2 locations of apparent water discharge, a copper tube running down the column from above the suspended ceiling and discharging at the base of the column, as well as a short section of rubber hose extending down 3-4" from the ceiling (see Photo 14). Evidence of standing water was visible at the base of this column, which is consistent with the water staining at the top of the column below.

Mr. Gary M. Karr Page 4 February 16, 2009

CONCLUSIONS/RECOMMENDATIONS

Window Wall

Based on our visual observations and professional experience, the uneven movement of the cast-stone curbs is due to water intrusion causing the metal shims to corrode and expand. The major concern is that if the shims are left to continue corroding, the cast stone curbs may displace further and further damage the aluminum and glass window wall system. Further expansion of the metal shims could also lead to cracking of the cast stone curbs. We recommend the corroded shims be removed and replaced with plastic shims.

It is likely that the use of metal shims is consistent at all tall curbs along the East State Street window wall. The metal shims will continue to corrode and eventually lead to uneven curbs and possible damage to the aluminum window frames. We therefore recommend watching the remaining curbs for any signs of vertical displacement and replacing the shims at each location as required.

The sealant joints along the window wall system are in generally good condition. However, the vertical joints between the curb pieces, as well as the joints between the aluminum window wall frame and cast stone curbs are beginning to deteriorate or have failed at the displaced areas. These should be repaired once the cast stone curbs are reset. We also noted that there is also no sealant joint at the interface of the cast stone curb and the concrete sidewalk. This condition makes the joint susceptible to water intrusion, which could enter the building below, or freeze and cause damage at the sidewalk level. We recommend a sealant joint be installed at this location to alleviate these concerns.

Entrance Pier

We believe the observed brick cracking and displacement at the west pier to be a result of water intrusion. The brick should be rebuilt to prevent further damage and possible falling brick, as well as to prevent water from entering the building.

Parking Levels

Based on our visual observations and professional experience, the water intrusion at the vertical construction joints is common and is most likely due to failed waterstops or improper installation of the waterstops material. The water entry is not a severe structural concern, but will continue, and may eventually become a concern to the Basement level's steel framing if left untreated. The two joints currently exhibiting signs of water entry should be repaired using chemical grout injection.

The remaining construction joints on the Basement and Subbasement levels currently appear watertight, but may exhibit similar leaks in the future. Should additional joint leaks occur, a similar program of chemical grout injection should be implemented to seal the joints.

We believe the cracked concrete encasement at the Subbasement level of Column C5 is due to the water being released above. The water is likely passing through joints in the floor above to reach the steel column. The steel column is corroding and the expanding steel is forcing the concrete encasement to crack. The encasement should be removed, the steel column wire brushed and painted, and a new encasement provided. We also recommend that the building investigate to determine the sources of the water and reroute them directly into the building drainage system.

Mr. Gary M. Karr Page 5 February 16, 2009

Below is a summary of our recommended scope of work and probably construction costs to prevent further damage and increase the life of the building components:

R	EPAIR ITEMS		COST(\$)
SI	nort-Term		
W	indow Wall		
1.	Remove 8" wide x 2"± deep strip of concrete sidewalk along the face of the stone curbs in front of the west atrium lobby window wall and in front of "Renaissance Grill" (~ 55 linear feet repair length). Remove any corroded metal shims and reset on plastic shims. Drypack below curbs and repair sidewalk. The repair @ "Renaissance Grill" is similar and involves the removal of expansion joint material and resetting of the curbs on new expansion joint material to provide level surface across tops of curbs. Repair vertical and horizontal sealant joints in the abovementioned areas.	\$	12,000.00
<u>En</u>	trance Pier		
1.	Rebuild approximately 6 square feet of red brick cladding at the top of the west pier. This will require careful coordination with the owner and a temporary blockage of the main entrance. It may be best if this work is completed outside of normal building hours.	\$	4,500.00
Par	king Levels		
1.	Repair 2 leaking vertical construction joints on the north foundation wall using chemical grout injection.	\$	7,000.00
2.	Remove the cracked encasement on column C5. Wire brush to clean steel column and provide new concrete encasement.	\$	11,000.00
3.	Investigate sources of water near column C5 at Basement level. Redirect water directly into building drainage system.	\$	n/a
	Subtotal Contractor Overhead & Profit TOTAL SHORT-TERM REPAIR BUDGET	\$ \$	34,500.00 4,000.00 38,500.00

Mr. Gary M. Karr Page 6 February 16, 2009

Long-Term (In addition to Short Term)

Window Wall

1.	Perform similar repair along face of remaining cast stone curbs along East State Street. (~ 225 linear feet repair length)	\$ 45,000.00
2.	Install new cove sealant joint along interface of cast stone curbs and sidewalk full length of East State Street elevation (~ 400LF).	\$ 1,500.00
	Subtotal	\$ 46,500.00
	Contractor Overhead & Profit	\$ 6,000.00
	Subtotal Long-Term Budget	\$ 52,500.00
	Subtotal Short-Term Budget	\$ 38,500.00
	Contingency (10%)	\$ 9,100.00

TOTAL SHORT & LONG-TERM BUDGET

If we can be of further assistance, please contact us.

Sincerely,

Frik S. Villari

ESV/esv Enclosures

cc: Richard S. Flodmand

Allen Roth, P.E.

\$ 100,100.00

Mr. Gary M. Karr Page 7 February 16, 2009

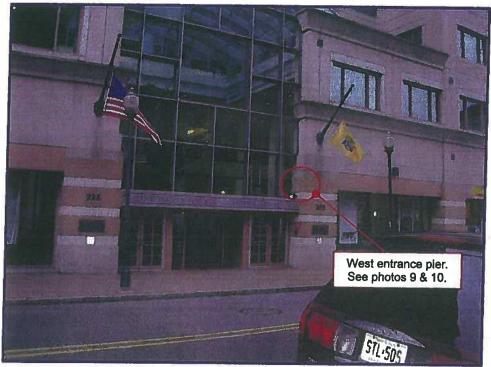


Photo 1. North elevation @ main entrance



Photo 2. North elevation of building west of the main entrance along East State St.

Mr. Gary M. Karr Page 8 February 16, 2009

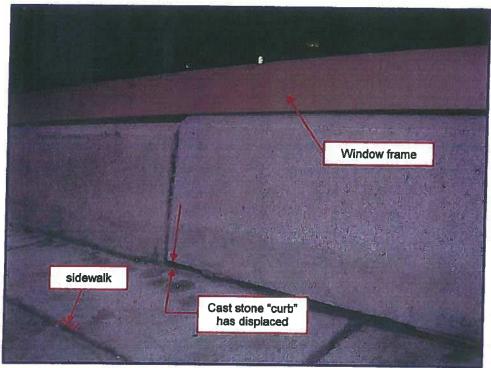


Photo 3. Movement of cast stone "curbs" below curtain wall system

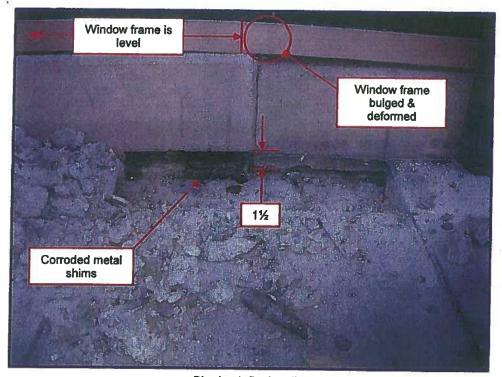


Photo 4. Probe #1

Mr. Gary M. Karr Page 9 February 16, 2009

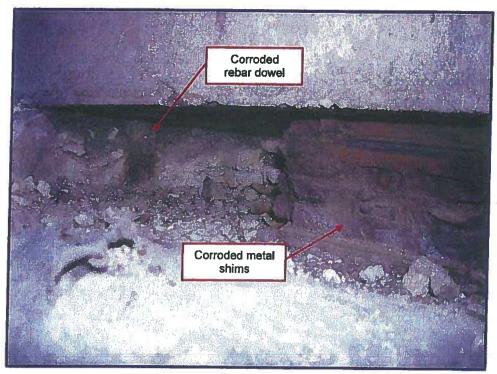


Photo 5. Close-up below cast stone "curb" at Probe #1



Photo 6. View of backside (interior) of cast stone "curb" & window frame

Mr. Gary M. Karr Page 10 February 16, 2009

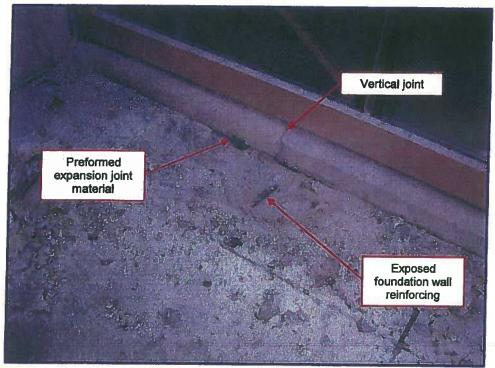


Photo 7. Probe #2

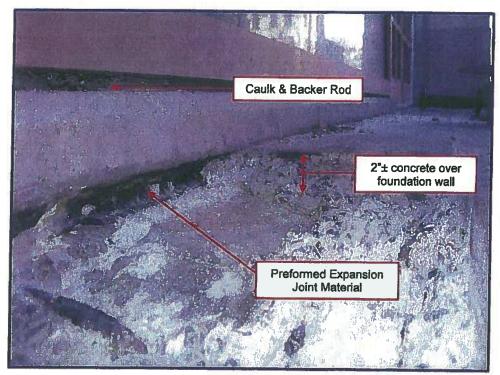


Photo 8. Close-up at Probe #2 looking west

Mr. Gary M. Karr Page 11 February 16, 2009

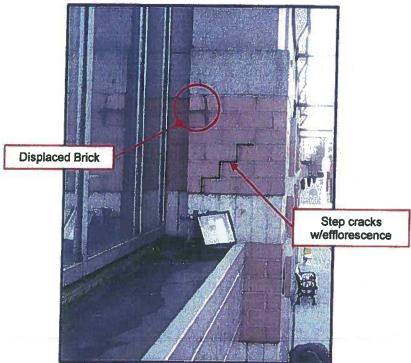


Photo 9. Cracked brick on west entrance pier looking east

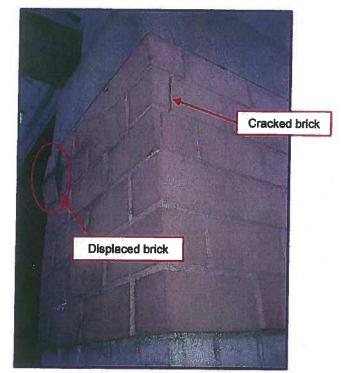


Photo 10. Close-up of cracks @ west entrance pier

Mr. Gary M. Karr Page 12 February 16, 2009



Photo 11. Active foundation wall leak @ Basement level

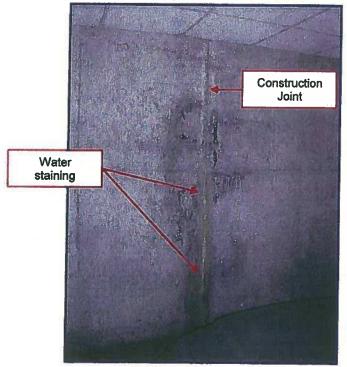


Photo 12. Active foundation wall leak @ basement level

Mr. Gary M. Karr Page 13 February 16, 2009

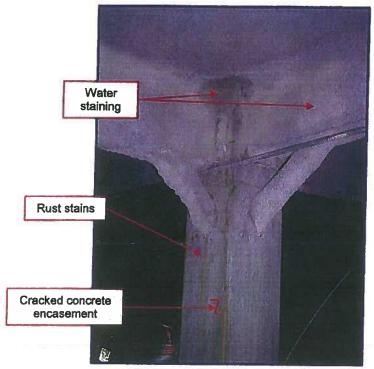


Photo 13. Rust and water stains @ subbasement Column C5

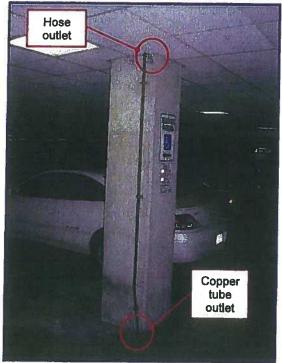


Photo 14. Basement level Column C5 (directly above Photo 13)