

Location: _____




F1560

HEAVY DUTY DRAIN WITH INTERNAL TRAP

Specification: MIFAB Series F1560 extra heavy duty lacquered area drain with side outlet body, internal deep seal trap and cleanout, seepage pan, standard 1" (25) thick, 12" (305) square heavy (specify material finish) hinged grate and suspended sediment bucket.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 12" square tractor grate is used with all types of poured finished floors. Hinged grate permits easy access to sediment bucket. The anchor flange provides maximum support for drain.

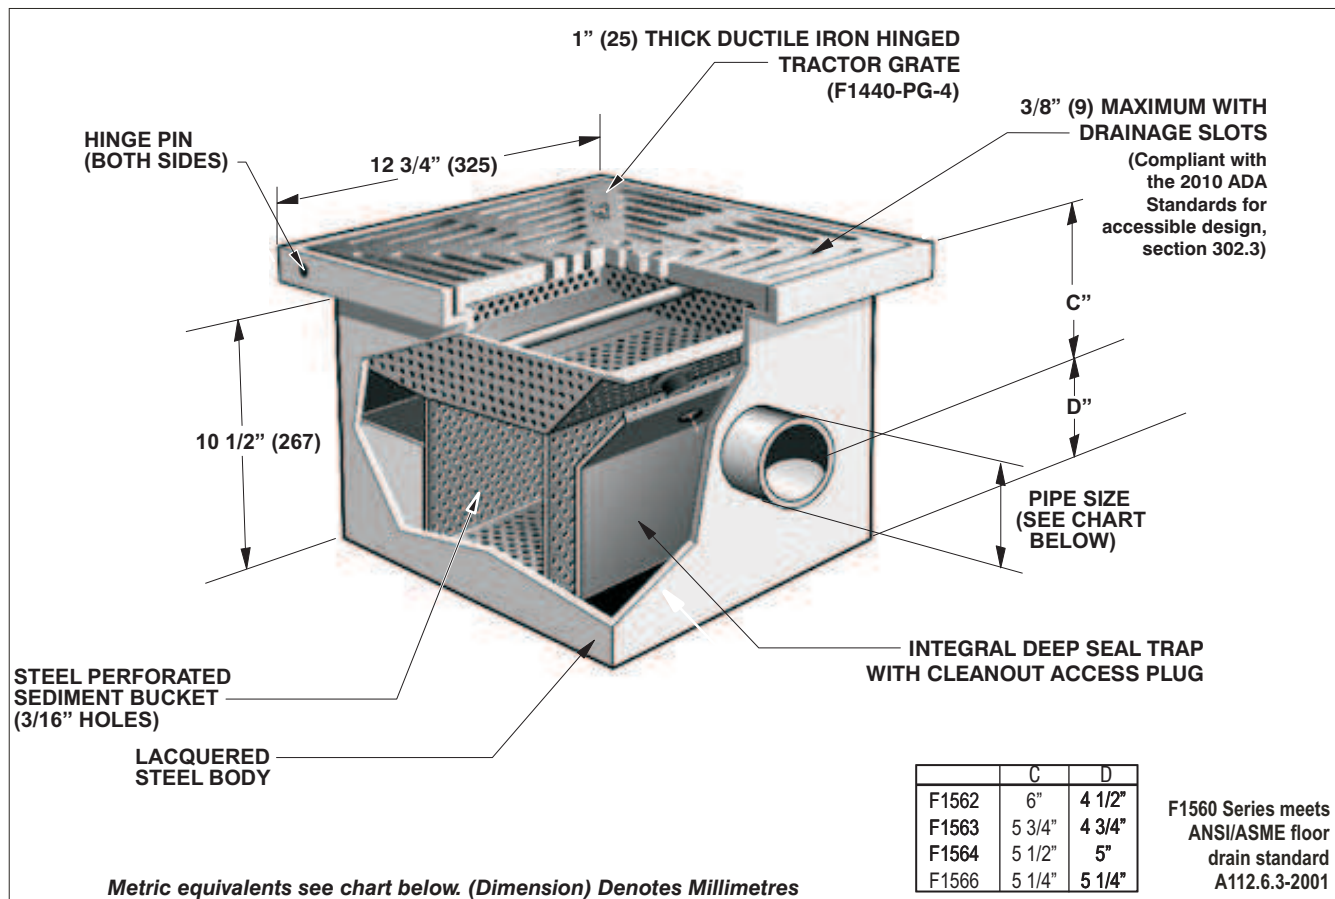

MODEL NO.	WEIGHT LBS.	GRATE SIZE	NO HUB PIPE SIZE	ANSI/ASME RATING	
				FREE AREA	LOAD RATING S.S. (-3), D.I. (-4)
F1562	116	12" x 12" (305 x 305)	2" (51)	51 in ² (32,903 ²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)
F1563			3" (76)		
F1564			4" (102)		
F1566			6" (152)		

SUFFIX	OPTIONAL VARIATIONS:
<input type="checkbox"/> -3	Stainless steel veneer top assembly (Add 3/16" to height)
<input type="checkbox"/> -4	Ductile iron grate
<input type="checkbox"/> -6	Security screws (TR30 Torx & pin)
<input type="checkbox"/> -7	1/2" trap seal primer connection
<input type="checkbox"/> -11	Acid resistant epoxy coated body
<input type="checkbox"/> -12	Galvanized top assembly
<input type="checkbox"/> -13	Galvanized body
<input type="checkbox"/> -28	Stainless steel body (Type 304)

SUFFIX	
<input type="checkbox"/> -ARRA	ARRA (Stimulus Act) compliant product
<input type="checkbox"/> -BA	Buy American Act compliant product
<input type="checkbox"/> -C	Membrane clamp
<input type="checkbox"/> -GS	Grounding strap
<input type="checkbox"/> -HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
<input type="checkbox"/> -PA	Pennsylvania Steel Act compliant product
<input type="checkbox"/> (Specify)	Special outlet size

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____