

Location: \_\_\_\_\_




# F1830-PL

## LARGE PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE AND DOME

**Specification:** MIFAB Series F1830-PL lacquered cast iron standpipe type planting area drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and adjustable 4" (102) diameter ABS perforated standpipe and stainless steel secured dome.

**Function:** Used in areas such as flower boxes and others where the drain is buried underground. Perforated standpipe allows for sub surface drainage of water. The stainless steel dome secured to the top of the standpipe is set at ground level and permits the drainage of excess surface water. Membrane clamp is provided to secure the waterproofing membrane.

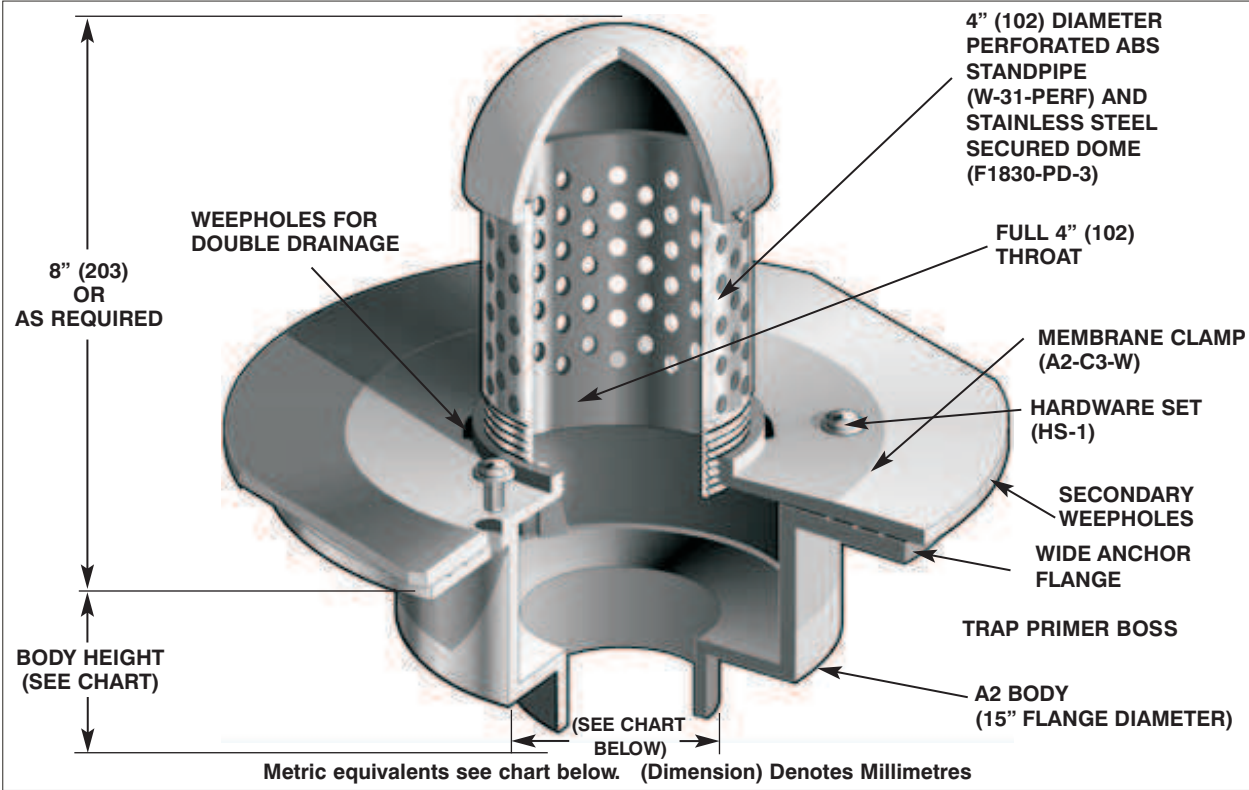

**PARTS:**




A2 Body



W-31-PERF and F1830-PD-3



A2-C3-W



HS-1

F1830-PL Series meets ANSI/ASME floor drain standard A112.6.3-2001

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51) ○	6" (152) <input type="checkbox"/>	6 1/8" (156) <input type="checkbox"/>	5 7/16" (138) <input type="checkbox"/>	6 1/4" (159) <input type="checkbox"/>	7 1/8" (181) <input type="checkbox"/>
3" (76) ○	6" (152) <input type="checkbox"/>	6 1/8" (156) <input type="checkbox"/>	5 7/16" (138) <input type="checkbox"/>	6 1/4" (159) <input type="checkbox"/>	7 3/8" (187) <input type="checkbox"/>
4" (102) ○	6" (152) <input type="checkbox"/>	6 1/8" (156) <input type="checkbox"/>	5 7/16" (138) <input type="checkbox"/>	6 1/4" (159) <input type="checkbox"/>	7 3/8" (187) <input type="checkbox"/>
5" (127) ○	6" (152) <input type="checkbox"/>	— <input type="checkbox"/>	5 7/16" (138) <input type="checkbox"/>	6 1/4" (159) <input type="checkbox"/>	— <input type="checkbox"/>
6" (152) ○	7 1/4" (184) <input type="checkbox"/>	7" (178) <input type="checkbox"/>	7" (178) <input type="checkbox"/>	6 1/4" (159) <input type="checkbox"/>	— <input type="checkbox"/>

**SUFFIX OPTIONAL VARIATIONS:**

- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body
- 40 Underdeck clamp
- 41 Sump receiver
- 43 Solid standpipe
- 79 Standpipe over 8", per inch
- 90 Threaded side outlet (2",3",4") (cast iron only)

**SUFFIX**

- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 92 Stainless steel perforated stand pipe
- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2",3",4")
- X Inside caulk outlet

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.