



UNION BANK OF INDIA
REGIONAL OFFICE
328, Civil Lines
Azamgarh(U.P.)276001
Telephone: 05462- 247232, 246537& Fax:05462 - 247713,
E-mail - dgmroa@azamgarh@unionbankofindia.com

REF.NO. ROA/P&D/ 3238 /13

DATED 24.09.2013

SUBJECT: Sealed Tenders are invited for Furnishing and Electrical works of the Pawai and Rajaganj Branch at following centres- [to publish on bank's website]

(i) Pawai Branch (Azamgarh-U.P.)

(2)Rajaganj

ISSUE OF TENDERS FROM **25.09.2013 TO 17.10.2013**

LAST DATE OF SUBMISSION 17.10.2013 UPTO 1.00 (P.M.) HOURS.

TENDER OPENING DATE 17.10.2013 TIME **3.30 (P.M.)**

(TENDERS WILL BE OPENED IN PRESENCE OF CONTRACTING AGENCIES)

PRICE OF THE TENDER DOCUMENT RS.500.00 for each tender separately (Non Refundable) BY WAY OF PAY ORDER/DD payable at Azamgarh

Tender forms can be downloaded from bank's website.[<http://www.unionbankofindia.co.in/home.aspx>]

PLACE OF SUBMISSION:

DY. GENERAL MANAGER
UNION BANK OF INDIA
REGIONAL OFFICE
328, Civil Lines
Azamgarh(U.P.)276001
Telephone: **05462- 247232, 246537**
& Fax:**05462 - 247713**

TENDER ISSUED TO: Furnishers & Electricians on the approved panel of the Bank .

TENDER NOTICE

SUBJECT: Sealed Tenders are invited for Furnishing and Electrical works of the Branch at following centres-

- (1) Pawai Branch (Azamgarh-U.P.)
(2) Rajaganj Branch (Azamgarh-U.P.)

1. Sealed item rate tenders are invited by M/s Union Bank of India, Regional Office azamgarh. The approximate cost of the work is _____

Site	Furnishing	EMD	Electricals	EMD
(1) Pawai Branch (Azamgarh-U.P.)	` .5.26 lac	` .10600.00	` 1.55 lac	` .3100.00
2) Rajaganj Branch (Azamgarh-U.P.)	` .3.37 lac	` .6800.00	` .1.67 lac	` .3400.00

The work to

2. The work to be completed within **ONE** month from 7th day of the date of acceptance of work order placed by M/s Union Bank of India.
3. The tenderers are required to complete tender form , price the schedule of quantities and sign each page of tender documents before submission. The completed set is to be enclosed in **a sealed envelope** addressed to :

Dy. General Manager
UNION BANK OF INDIA
REGIONAL OFFICE
328, Civil Lines
Azamgarh(U.P.)276001

4. Tenders will be received up to 1.00(P.M.) hours on 17 .10.2013.
5. No tender will be received after the expiry of the time notified for receiving tenders under any circumstances whatsoever.
6. The tender will be opened at **3.30(P.M.) hours on 17th October 2013 .** at above address in the presence of authorized representative of contracting agency if any present.
7. Tender shall remain valid for acceptance for a period of 90 days from the notified last date of tender submission.
8. The Bank reserve the right to reject any or all tender received without assignment of any reasons thereof.
9. The tender rate against each item of work / price indicated in the schedule of quantities and rates / price should be indicated both in words and figures. In case of any discrepancy, the rates indicated in words would prevail.
10. The rates quoted against each item of work / price should be for the complete finished item of work and include all labour, material, taxes, overhead, duties, etc. Any statutory change in the tax structure after opening of the tender shall be reimbursed by the Bank as per actual.
11. Each tender shall be accompanied by **Earnest Money & Tender Cost mentioned as above** in the form of Pay Order / Demand Draft in favour of Union Bank of India, payable at **Azamgarh**. Tenders without Earnest Money & Tender Cost shall be summarily rejected.
12. The earnest money deposited shall not carry any interest and will be refunded to the unsuccessful tenderers. Earnest money paid by the successful contractor will be retained by the Bank till completion of the work.
13. Earnest money paid by contractor shall be forfeited by the Bank if contractor fails to undertake the job if he is communicated about acceptance of his rates.
14. All tenders in which any of the prescribed conditions are not fulfilled or incomplete in any respect are liable to be rejected.
15. This tender notice shall form part of the contract documents.

For Union Bank Of India

Dy. General Manager

GENERAL CONDITIONS OF CONTRACT

Subject: Tenders for Furnishing and Electrical works of the Branch/ATMs

General Instructions to Contractor

- Inspection of sites: The contractor shall visit and examine the site and satisfy as to the nature and correct dimensions of work and facilities for obtaining material and shall obtain generally his own information on all matters affecting the execution of work. No extra charge made in consequence of any misunderstanding or incorrect information on any of these points on the ground of insufficient description will be allowed. All expenses incurred by the contractors in connection with obtaining information for submitting this tender including his visit to site and efforts in compiling the tender shall be borne by the tenderer and no claims for reimbursement thereof shall be entertained.
- 2 Safety Regulations: The contractor shall take all the necessary precautions while working and to safeguard adjacent property, Bank's property, Bank's employees, and traffic persons
 - 3 Compliance to local laws: The contractor shall conform to the provisions of any Act of the Legislature relating to the work and to the Regulation of Bye Laws of any authority. He shall also obtain the permission of the Municipality or any other Authorities if required under the existing rules.
 - 4 Site cleaning: All the rates quoted are inclusive of removal of rubbish / debris collected during the progress of work, rejected material and clearance of site before and after the work is completed. Not more than one truck load shall be stored that to for not more than 3 days. The contractor shall arrange to remove the same immediately. If the contractor is failing to remove the same and the expenses shall be recovered from the contractor and he will not dispute for the expenses so incurred.
 - 5 Vouchers / bills: Contractor shall upon the request of the Bank furnish bills, invoices, accounts, receipts and other vouchers for all materials brought on site to prove that the material purchased are as mentioned in the specification.
 - 6 Contractor's responsibility: The work will from time to time be examined by Bank's Architect / Engineer, but such examination shall not in any way exonerate the contractor from the obligation to remedying any defects which may be observed at any stage of the work or after the same is completed.
 - 7 Dismissal from work: The contractor shall upon the written request of the Bank's

Architect / Engineer immediately dismiss from the work any person employed by him thereon, who may in the opinion of the authority be incompetent or misconduct himself and such person shall not be again employed on the work, without the permission of the bank.

- 8 Order of work, etc.: Bank reserves the right to fix the order in which the various items of work involved are to be executed. However, the contractor shall be responsible for the completion of the entire job within the item limit specified failing which liquidated damages as mentioned in clause No.49 shall be recovered from the contractor.
- 9 Commencement of work: The work must be started within 7 days upon accepting the work order and the programme for carrying out the various jobs shall be drawn out in consultation with the Bank's Architect / Engineer. Adequate labour force shall be provided to complete the work within the specified period. Proper security aspects should be taken care of by adequate vigilance in view of the importance of the building. Default in compliance with the programmes so finalised shall entail operation of liquidated damages as stated.
- 10 Subletting the work: The contractor shall not directly or indirectly sublet the work to other party without written permission from the bank.
- 11 Quantities of works are provisional: The quantities mentioned in schedule are provisional and likely to increase / decrease to any extent or may be omitted thus altering the aggregate value of the contract. No claim for loss of profit / business shall be entertained on this account
- 12 Distribution of work: The Bank reserve the right to distribute the work for which quotation have been called, among more than one parties, if found necessary. No claim in this respect shall be considered and the contractor agrees to cooperate with other agencies appointed by the bank.
- 13 Third party damage: The contractor shall be responsible for all injury to persons, animals, building, building structure, any damage to road, streets, footpaths and shall rectify it at its own cost.
- 14 Insurance cover: All the workers of the contractor as well as his sub-contractor must be properly covered by an Insurance Policy under Workman's Compensation Act and Fatal Accidents Act. The contractor at his own expenses arrange to effect and maintain

until the virtual completion of the contract, insurance policy in the joint name of the Bank and the contractor against this risk to be retained by the Bank until the virtual completion of the work, and indemnify the Bank from all the liabilities arising out of such events. In case of delay, contractor shall arrange to extend insurance policy till work is completed.

- 15 Delay & Extension of time: All the work should be completed within the specified period in the tender. If the work is delayed due to the reasons beyond the control of the contractor, he should applying to the Bank explaining, therein the reasons for such delays, immediately and if in the opinion of Bank's authorities the delay is justified, the contractor shall be granted extension in time limit.
- 16 Certificate of virtual completion: As soon as the work is completed, the contractor shall inform in writing such completion to the Bank's Architect / Engineer who will inspect the work and if satisfied will issue the certificate that the work has been virtually completed and the defects liability period shall commence from the date of such certificate.
- 17 Defect liability period: The defects or other faults which may appear during the defect liability period which is 12 months after the virtual completion of the work, arising in the opinion of the bank due to inferior quality of material or bad workmanship not in accordance with the contract, contractor shall make good at his own cost within a reasonable time. In case of default, Bank may employ and pay other agencies to amend and make good such defects and all expenses / damages / losses shall be recoverable by Bank or may be deducted from any money due to the contractor
- 18 Arrangement of work: The contractor shall organise the work in such a way that the office users or the nearby public area put to no hardships and the working of the office is not affected. The contractor shall take adequate care during the progress of work to protect the office property like stationery, furniture, etc. In case of any damage, the same shall be made good by the contractor. Contractor is agreed to work after office hours for which no extra cost shall be considered.
- 19 Stacking of material: The contractor is not to stack any of his material recklessly so as to endanger the safety of the building and cause any nuisance to the occupants and the public.
- 20 Extra charges: It must be clearly understood that all the conditions of contracts are intended to be strictly enforced and that no extra charges in respect of extra work will be allowed unless they are clearly outside the spirit and meaning of the condition and unless such work shall have been ordered in writing.

- 21 Protection of material and work: The contractor shall be responsible for storing and watching his own material and protecting the work at his own cost. The contractor and his worker will be allowed to use lift after office hours. However, no paint drums or heavy bag of cement / paint will be allowed to be taken into the lift. Any damage / spoiling of lift / floor / dado caused during such act will have to be made good by the contractor at his own expenditure.
- 22 Water supply: The contractor shall make his own arrangement for water required for the work. In case the water is available and supplied by the Bank, the charges for the same shall be recovered at the rate of 1% of value of the work executed. In case water supplied by the Bank, the contractor shall make his own arrangement for the storage, pipeline from point of take off to the required location.
- 23 Electric supply: Electricity will be supplied by the Bank, the contractor shall make his own arrangement for providing points, wires lines, extension board wherever it is required in the premises, in and out.
- 24 Approval of samples: The contractor shall furnish well in time before work commence at his own cost, colour samples, samples of material or workmanship that may be called by Bank's Architect / Engineer for approval. Rates quoted shall cover for such preliminary work.
- 25 Workmanship: The work involved calls for a high standard of workmanship combined with speed. All the glass panes, door handles / hinges, electric fitting, fans, furniture records, floors etc. are to be thoroughly cleaned after work is completed. Any damage to the flooring, tiles, dado, panelling or any other part of the building, etc. shall be made good at the cost of the contractor to the entire satisfaction of the Bank. Contractor shall make all arrangements for shifting of furniture / records and keeping the same in its original position after he finishes the work on daily basis. The contractor at his own cost shall provide brown paper, polythene, tarpaulin etc. for protecting furniture / fixtures, paneling, electrical, fittings, records, etc.
- 26 Interpretation of documents / drawing: Except where otherwise provided in the contract all questions and disputes relating to the meaning of the specifications, design drawings and instructions herein before mentioned and as to the quality of workmanship or materials used for the work or as to any other question, claim,

right, matter or thing whatsoever, in any way arising out of or relating to the contract, designs, drawings specifications, estimates, instructions, orders or these conditions or otherwise concerning the works, or the execution or failure to execute the same whether arising during the progress of the work or after the completion or abandonment thereof shall be referred to the competent authority of the Bank whose decision shall be final and binding on the contractor.

- 27 Use of scaffolding: The contractor shall allow the use of scaffolding erected by them to any other agency employed by the Bank during the contract period without any payment.
- 28 Provisional Item: If ordered by the Bank, contractor shall be required to carry out provisional items at the same conditions and rates as applicable for this contract.
- 29 Measurements of all concealed items: Measurements of all concealed items of work and extra item if any, shall be got recorded by the Bank's Architect / Engineer before they are checked up.
- 30 Measurements: All measurement tapes shall be of steel and all scaffolding and ladders that may be required for taking measurements shall be supplied by the contractor.
- 31 Cleaning during the work: The rates quoted shall include cleaning of ceiling roses, electric switches, boards, window panes etc. after the repairing leaving the site neat and tidy from time to time.
- 32 Complying I.S. specification: Unless otherwise mentioned in the contract, the latest Indian Standard Code for material specifications, method of work, mode of measurements shall be followed. The payment shall be made on the basis of actual measurement of work done to be submitted along with bill
- 33 Rate to include: The rates quoted by the contractor shall cover for work at any height in the premises for all finished items under this contract. The rate quoted shall be inclusive of all material cost, wastage, labour, loading, profit, taxes if any, scaffolding, transport, supervision, spot light arrangement and any other means to complete the job. Octroi, sales-tax, works contract tax or any other taxes present or future to be included in the rates so quoted. If there is a change in the tax structure / duties as per State / Central Govt. order after opening of tender, the Bank shall reimburse difference in tax

as per actual.

- 34 Price Fluctuation: The rates quoted by the contractor shall be firm throughout the currency of contract (including extension of time if any granted) and will not be subject to any fluctuation due to variation in the cost of material or labour.
- 35 The successful tenderer if called upon to do so, shall obtain a letter from the approved trade manufacturer whose product is used, if found necessary by the Bank confirming that the manufacturer shall provide all the technical assistance and supervision during the execution of the work at all such places as directed and the contractor shall bear the expenses, if any, for such supervision and technical assistance supplied by the trade manufacturer.
- 36 Testing of materials: If at any point of time during the work, if Bank authorities desire to carry out the tests of certain materials, the contractor shall arrange for the same and submit the test report without any extra cost to the Bank.
- 37 The contractor shall note that they should bring to the notice of the Architect / Engineer any breakage in glass window before starting work. However, if any glass window is found to be broken during the repairing work, the same shall be replaced by the contractor at his own cost.
- 38 Conditional tenders: Conditional tenders are liable to be rejected.
- 39 Rates of non-tendered items: The successful tenderer is bound to carry out any item of work necessary for the completion of the job even though such items are not included in schedule of quantities.
- 40 Abandonment of work: If in any case the work required to be abandoned, the contractor shall not be entitled for any claims and he will be paid as per the actual work done till that period.
- 41 The Bank reserves the right to accept / reject the lower or any or all tenders in part or in whole without assigning a reason therefor.
- 42 Decision of the Bank shall be final and binding on any matter connected with the work. The matter of any dispute shall be decided after mutual discussions based on the terms and conditions of this contract. However, if the matter can not be resolved then the same shall be referred to the respected, qualified person in the field agreed to both the parties and his opinion shall be binding on both the parties. However, this is precourse to any legal action in this regard.
- 43 Incomplete quotation: Incomplete quotations shall be summarily rejected
- 44 Payments: The contractor shall be paid by the Bank from time to time under interim payment on account of works executed and when the value of work equal to the approximate value named in the Appendix as 'Value of work for Interim Certificate' has been executed in accordance with this contract.

- 45 When the work has been virtually completed and Bank's Architects / Engineer has certified in writing that the work has been completed on the basis of detailed measurements and has made a final scrutiny and that there is no dispute items, rates, ad quantities, the contractor shall be entitled to the payment of the final bill in accordance with the final certificate which will be honored within the period specified in the Appendix as period of honouring final certificate.
- 46 The contractor shall be paid by the Bank within the period named in Appendix (period of honouring certificate) after such certificate has been delivered to the employer by the Bank's Architect / Engineer. Bank's Architect / Engineer has power to withhold any certificate in the work or any part thereof are not carried out to his satisfaction or the contractor fails to show the desired progress or fails to follow the instructions given or in case of breach of this contract.
- 47 For water proofing works on traces, bathroom, WC, Chajja, work has to be executed through the agency specialized in waterproofing. Contractor will have to submit a guarantee of 10 years on stamp papers as per the format to be prescribed by the Bank.
- 48 Earnest Money Deposit of successful tenderer shall be treated as security deposit. The contractor should pay this amount to the Bank by DD or PO at the time of submission of tender. This amount shall be retained by the Bank till the work is virtually completed and all amounts relating thereto settled. Second part of security deposit shall be built through the retentions from interim and final bills of the contractor and the amount of retention shall be as stated in the Appendix.
- 49 When the certificate of the virtual completion is issued to the contractor the security deposit in the form of EMD and 50% of retention money shall be refunded, provided that the contractor has fulfilled all the conditions of contract and further provided that the employer has no claim for forfeiture of part or whole of the said deposit. The balance 50% of the retention money built up through retention from interim and final bills will be returned to the contractor after the expiry of defect liability period, subject to deductions for any appropriations thereof required to be made by the Bank as per conditions of the contract. The contractor should note that no interest will be allowed on his security deposit.
- 50 The contractor is requested to sign each page of the quotation and put rubber stamp, seal below his signature and seal the quotation in an envelope.
- 51 Liquidated damages: If the contractor fails to maintain the required progress or to complete the work and clear the site or before the contract or extended date period of completion, he shall without prejudice to any other right, pay as agreed compensation amount of __% of contract amount per week of delay subject to maximum of __% of contract amount as liquidated damages.
- 52 Records & measurements: Measurements shall be taken jointly by Bank's Architect / Engineer and contractor and shall without extra charges provide assistance with appliance, labour and other things necessary for the work and measurements will be signed and dated by both the parties on completion of measurements.

- 53 Safety measures: The contractor at his own cost shall provide tarpaulins on the external side of the building at the time of breaking plaster etc. to safeguard adjacent property, Bank's property, employees, traffic, etc. The contractor shall follow all the safety measures while carrying out the work. Employer that is Bank shall not be liable for any compensation due to accident, any mishap or negligence.
- 54 If there is delay in commencement of work for any reason, the employer that is Bank shall not be liable for any compensation.
- 55 If at any point of time during the progress, it is observed that the contractor is not progressing the work with due diligence, care and lagging much behind the schedule or fails to gear up the work despite instructions from Bank's Architects, the employer (Bank) reserves the right to terminate the contract with 7 days notice. In such case, the contractor shall be liable to pay the employer any extra cost involved for the completion of the said work and will not obstruct any way in completing the work through other agency. After completion of entire work the contractor shall be paid for the actual work executed by him at the quoted rates after deducting any claims, damages. In case of such termination the security deposit held by the Bank will be forfeited
- 56 Although the number of coats of paints / polishing / white washing are specified the contractor will have to additional coats if the surface is not to the satisfaction of the Bank's Architect / Engineer and there shall be no extra payment on account of such coats
- 57 First Aid: The contractor shall be responsible for all first aid and he shall keep the site fully equipped to meet such emergency.
- 58 Supervision: The contractor is required to have on site during all working hours a competent supervisor (acceptable to Bank) who will be responsible for the conduct of worker and who has authority to receive and act on such instructions issued by the Architect / Engineer of Bank.
- 59 All work shall be carried out in a workman-like manner to the entire satisfaction of the Architect / Engineers.
- 60 Contractor shall follow all rules / regulations in force and should possess the license for employing labour and also follow all safety measures, labour bye law and shall be responsible for any lapse.
- 61 Transfer of Tender Documents: Transfer of tender documents purchased by one intending tenderer to another is not permissible.
- 62 Safety: The contractor shall carry out the entire work in a workman like manner having full regard for the safety of the men working at site. All safe practices shall be strictly adhered to by the workmen of the contractor like wearing helmets, safety belts when working at heights, gloves when handling sharp objects and reinforcement, eye shields during welding, safety shoes, etc. The contractor shall protect

sides of openings in floor slabs, edges of slabs, stairs, stairwells etc. with barricades, warning signs / lights and educate all his workmen regarding following safe working practices. He shall provide first aid boxes at site.

In spite of following safe methods, in case of any unfortunate accident, the contractor shall indemnify the employer against any expenses or claims towards treatment or compensation.

- 63 A Daily Diary Register: A daily diary register (with cement and steel stock statement) will be kept in the Engineer's Office or the site office. The contractor or his representative will furnish every day at 9.00 hrs. details of work for the day proceeding and the diary will be written up every day and jointly signed by the Engineer and the Contractor or their representatives in token of its correctness.
- 64 Nuisance: The contractor shall not any time do cause or permit anyone to do or cause any nuisance on the site or do anything which shall cause unnecessary disturbance of inconvenience to the Employer or to the owners, tenants or occupiers of other properties near the site and to the public generally.
- 65 Rights, remedies and powers:
- I) Termination of contract due to contractor's default. If the contractor:
- a. Abandon the contract.
 - b. At any time defaults in proceedings with the works with due diligence and continues to do so after a notice in writing of seven days from the Engineer or Project Architect or Employer, or
 - c. Commits default in complying with any of the terms and conditions of the contract and does not remedy it within 7 days after a notice in writing is given to him in that behalf of the Engineer or Project Architect or Employer.
 - d. Persistently disregards the instructions of the Engineer, Project Architect or contravenes any provision of the contract, or
 - e. Fails to remove materials from the site or to pull down and replace work after receiving from the Engineer, Project Architect notice to the effect that the said materials or works have been rejected.
 - f. Fails to complete the works or items of work on or before the stipulated date (s) of completion, and does not complete them within the period specified in a notice given in writing in that behalf by the Engineer, or Project Architect of Employer, or
 - g. Offer or gives or agrees to give to any person in the Employer's service or to any other person on this behalf, any gift or consideration of any kind as an inducement or reward for doing or forbearing to do so for having done or forborne to do any act in relation to the obtaining or execution of this or any other contract for the Employer, or

- h. Shall enter into a contract with the Employer in connection with which commission has been paid or agreed to be paid by him or to his knowledge, unless the particulars of any such commission and the terms of payment thereof have previously been disclosed in writing to the Employer / Engineer, or
- i. Shall obtain a contract with the Employer as a result of ring tendering or other non-bonafide methods of competitive tendency, or
- j. Being an individual, or if a firm, any partner thereof, shall at any time be adjudged insolvent or have a receiving order or order for administration of his estate made against him or shall take any proceedings for liquidation or composition (other than a voluntary liquidation for the purpose of amalgamation or reconstruction) under any Insolvency Act for the time being in force or make any conveyance or assignment of his effects or composition or arrangement for the benefit of his creditors or support so to do, or any application be made under any Insolvency Act for the time being in force for the sequestration of his estates or if a trust deed be executed by him for benefit of his creditors, or
- k. Being a company, shall pass a resolution or the court shall make an order for the liquidation of its affairs, or a appointed or circumstances shall arise which entitle the court or debenture holders to appoint a receiver or manager, or
- l. Shall suffer an execution being levied on his goods and allow it to be continued for a period of 21 days, or
- m. Assigns, transfers, sublets (engagement of labour on a piece work basis or of labour with materials not to be incorporated in the work, shall not be deemed to be sub-letting) or attempts to assign, transfer or sub-let the entire works, or any portion thereof without the prior written approval of the employer.

The Bank may, without prejudice to any other right or remedy which shall have accrued or shall accrue thereafter as the Employer by written notice determine the contract either as a whole or in part.

II) Upon such determination of the contract in whole or in part, the security deposit with the Employer in respect of the contract shall stand forfeited to the Employer without in any way effecting the rights of the Employer.

III) Rights of the employer after determination of the contract due to contractor's default.

The Engineer shall on such determination have powers to:

- a. Take possession of the site and any materials equipment, plant, implements stores etc. thereon, and / or
- b. Carry out the incomplete work by any means at the risk and cost of the contractor.

- IV) On determination of the contract in full or in part, the Engineer shall determine what amount, if any, is recoverable from the contractor for completion of the works or part of the works or in case the works or part of the works is not to be completed, the loss or damage suffered by the Employer. In determining the amount, credit shall be given to the contractor for the value of the work executed by him upto the time of cancellation or the value of contractor's materials to be present so as to record the measurements in his presence. If the contractor fails to be present in response to the notice, the recording of measurements shall be proceeded with ex-parte and the measurements as recorded shall be binding the contractor.
- V) The Bank shall have the right to use contractor's plant, machinery and materials on the balance work but shall not in any way be responsible for any damage or loss of the same and the contractor shall not be entitled to any compensation thereof.

h:\D:\arch.06\FORMAT FOR TENDER TERMS & CONDITIONS.doc

APPENDIX TO THE CONTRACT DOCUMENTS

Subject: _____

1. Defect liability period : 12 months from the date of virtual completion of work.
2. Date of commencement : 7 days after the contract is accepted by the contractor
3. Date of completion : _____ months.
4. Liquidated damages :
 - a) 1% of contract amount per week / day of delay subject to maximum of 10% of contract amount for the works of less than 6 month completion period.
 - b) 0.5% of contract amount per week / day of delay subject to maximum of 7.5% of contract amount for the works of which completion period is 6 months to 24 months completion period.
5. Period of honoring final certificate : 45 days
6. Value of work for interim certificate : Rs. _____
7. Period of honouring certificate : 15 days
8. Retention money : 8% of the bill value will be deducted as retention

subject o maximum security deposit, inclusive of EMD. 50% of the retention money so held shall be refunded after virtual completion and balance 50% after defects liability period.

9. Initial security deposit including : Rs. _____
earnest money deposit already
submitted.
10. Total Security deposit : 10% of the contract amount
11. Earnest Money to be submitted : 2% of the estimated cost of work by
demand draft or pay order on any Nationalised Bank drawn in
favour of Union Bank of India payable at _____.

Vinod\C:\arch-2005\FORMAT FOR TENDER TERMS & CONDITIONS.doc

MATERIAL SPECIFICATIONS FOR FURNISHING WORK OF BRANCH

- Board/Ply : Green, Century, Duro
- Laminate (FOR ATM) : Century (silver 1001 BR , Red -194) ,
Signature Kitmica , Newmica ,
Green lam(9001 Silver) conforming to IS 2046-1995
- Laminate : Sunmica , Greelam , Century
- Aluminium Section : Hindalco /JINDAL
- Door Closure : Hyper, Ritz, Everite (ISI marked)
- Glass : Modiguard, Saint Gobain
- Adhesive : Pidilite (Fevicol)
- Locks/Night Latch : Godrej
- Paint : Asian Paint,Nerolac
- Floor Spring : Hyper, Ritz, Everite (ISI marked)
- Vertical Blinds : Vista
- Flooring : Kajaria

Material Specification for Electrical Work

Tube Light	:	Phillips
Switches	:	MK wrapround / Legrand (Mosaic)
Wire/Cable	:	Anchor/Finolex/National /CCI
Fan	:	Crompton Greaves (high Breeze)
Exhaust Fan	:	Almorand/Khaitan
M. C. B. / D. B./MCCB	:	MDS/Schneider/Siemens
Main Switch	:	GE/L&T
Change Over	:	GE/L&T/ABB
PVC Conduit	:	AKG/ Sieko

**Schedule Of Quantities For Electrical Work of Pawai Branch of Union
Bank of India Azamgarh**

Sl. No.	Particulars	Qty./Unit	Rate per		Amount	
			Rs.	P.	Rs.	P.
1.	S/F of plug socket board consisting of 3 plug 5 Amp, three pin, three switch and one indicator with 7/22 separate circuit wiring for computer.	10 Nos.				
2.	Supplying and executing earthing work for Light fan/ computer with 450x450x6mm copper plate and 8 SWG copper wire provision to be made for CI cover manhole with locking device and 20mm of watering pipe with tunnel. Two plate to be buried with its top edge at a depth of atlas 2500mm from ground level with 15cm. Thick packing of characoal powder and salt as per ISI recommendation.	2no				
3.	Supplying and fixing mirror optic Double Tube light Fitting (2x 36 watt) The work to include wiring 1.5 sq mm and modular switches complete in all respect as /design. Including electronic choke (Model No BPS-518/236 HPF Philips make)	12 Nos.				
4.	S/W 5 Amp. Plug point with 2.5 sq mm copper wire in counter with continuous earthing wire complete in all respect with modular switches /socket.	15 Nos.				
5	S/F of wall bracket light points with 18 watt CFL fittings including 3/20 wiring and modular switches	3 no.				

Sl. No.	Particulars	Qty./Unit	Rate per		Amount	
			Rs.	P.	Rs.	P.
6.	S/F of light point (Tube Light Fittings 40 watt with all accessories) in 1.5 sq mm wiring complete in all respect including modular	8 No.				


switches .

7. S/F of 6 way DB with 32/25 Amp. DP, MCB and 4 Nos. 10 Amp SP, MCB for computer distribution. 1 No.
8. S/F of two pole MCB with Box one 63 Amp. Other 32 Amp. for UPS I/O. 2 Nos.
9. S/F of 15 Amp plug point with 3/20 wiring including modular switches with continuous circuit wiring. 6 Nos.
10. Fixing of existing ceiling fans after cleaning and polishing with hooks in rooms with adding rod of suitable length wherever necessary including 1.5 sq mm wiring and modular switches and regulator 2 nos
11. Supplying and wiring for Telephone point with twisted annealed, copper conductor PVC insulated and PVC sheathed telephone wire with socket in 14 SWG with all the accessories in concealed manner with 2-pin socket in suitable size of MS box. 1No.
12. Supplying and Fixing of ceiling fans (1200dia) with hooks in hall with adding rod of suitable length wherever necessary including 3/20 wiring and modular switches 9 no.

Sl. No.	Particulars	Qty./Unit	Rate per		Amount	
			Rs.	P.	Rs.	P.
13.	Supplying and fixing of Call Bell in BM's cabin including wiring etc.	1 no				
14.	S/F of 63 Amp. Main switch	1 No.				
15.	S/F of 63 Amp. Change over switch	1 No.				
16.	S/F of 32 Amp. Change over switch	1 no				

- | | | |
|-----|---|---------|
| 17. | S/F of Porcelain Kit Kat 63 Amp. | 3 Nos. |
| 18. | Supplying and Fixing of cabin fans (300Dia) in cash cabin/sorting cabin in 3/20 wiring and switches. | 1No. |
| 19. | Supplying and Fixing of circuit wiring for computer in 3/20 copper wire. | 10 Nos. |
| 20. | Supplying and Fixing of circuit wiring for lights and fans in 3/20 copper wire computer in all respect. | 6 no |
| 21. | Supply and fixing of Main line cable work from Pole to DB in hall with 25 mm x 3 ½ core cable with wiring. (Length to be as/site condition) | 70 mtr |
| 22. | Supplying and Fixing of exhaust fan in toilet/hall 15 inch dia 1.5 sq mm wiring and modular switches. | 2 no |
| 23. | Sub main wiring of UPS input and UPS output power supply with 2 no 6 sq mm + 1 No. 4 sq mm copper flexible wire in PVC conduit pipe .(payment as/actual length on site) | 35 mtr |
| 24. | Sub main Wiring of power supply from Main to Distribution Board with 4 nos 10 sq mm copper flexible wire in PVC conduit pipe . (payment as/actual length on site) | 30 mtr |

Total : Rs. -----

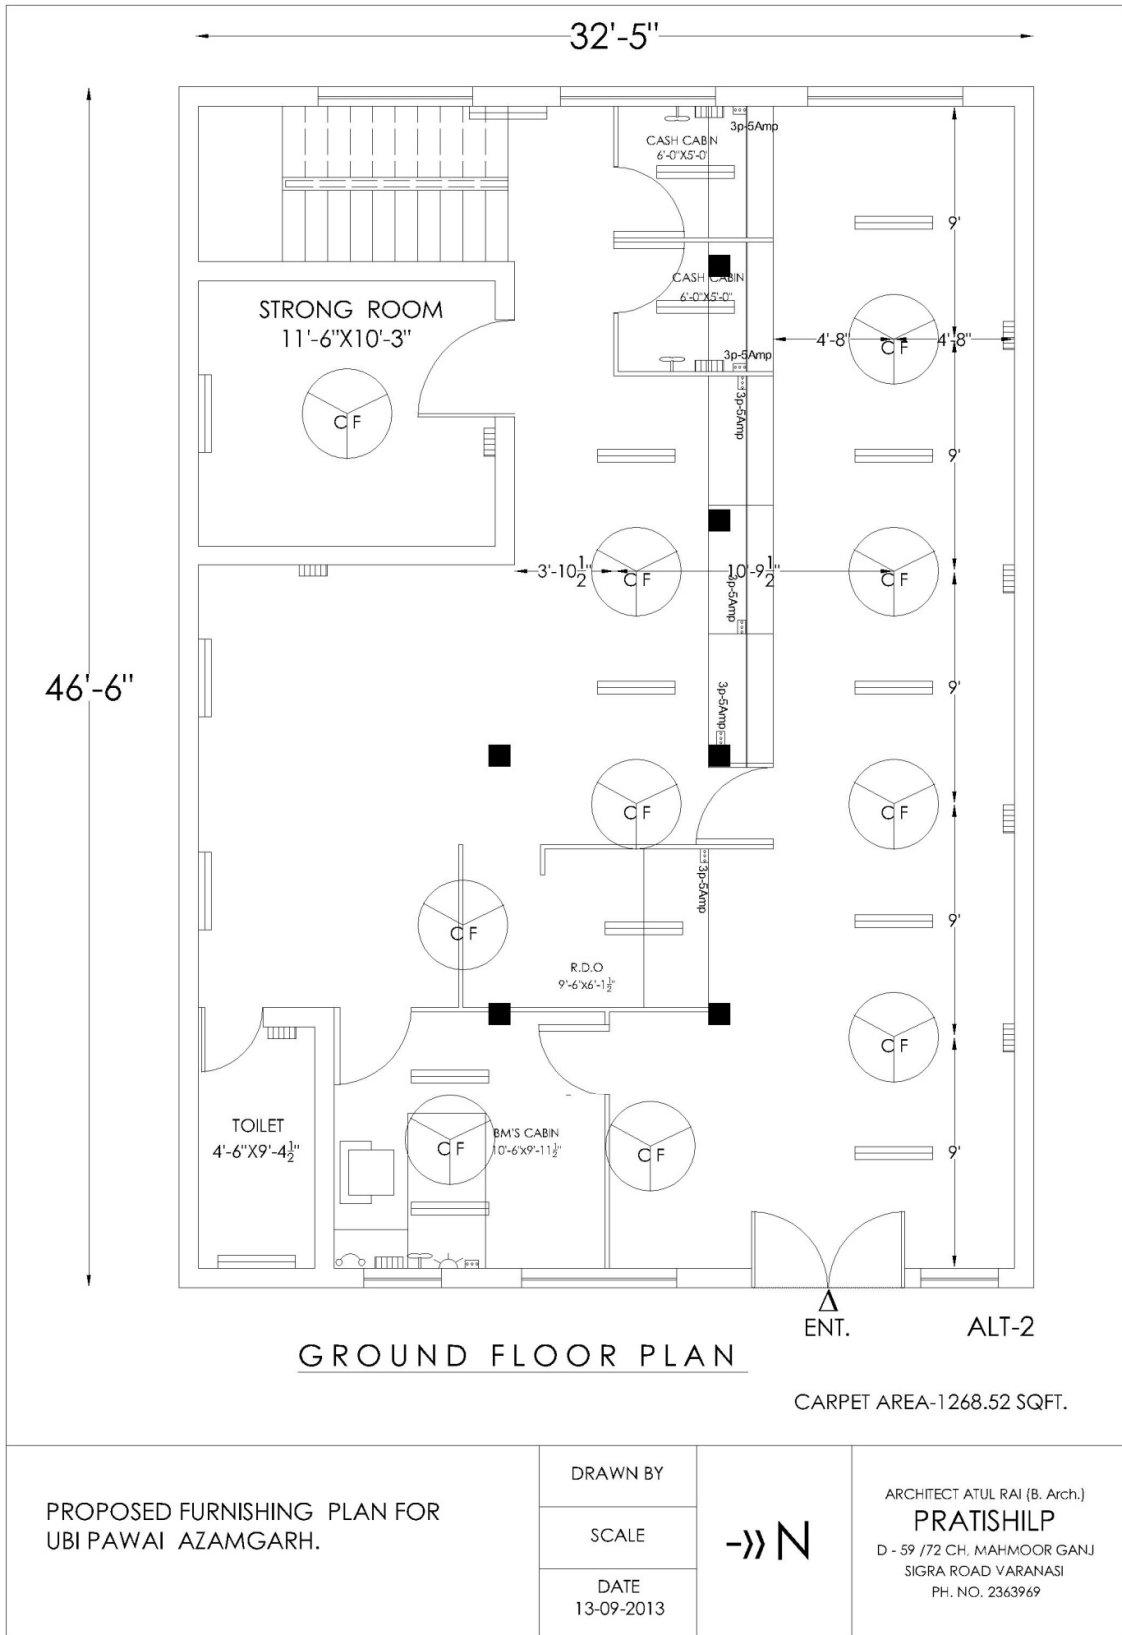

Electrical plan for UBI Pawai

**Schedule Of Quantities for furnishing work of Pawai Branch of Union Bank Of India
Azamgarh**

No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
1.	Providing and fixing of partly aluminium grill,8'-6"High Laminated partition in Cash Cabin . The under framing shall be of 50mmx40 mm mirindi (anti termite treatment) for under framing at a max .distance of 2' in each direction . 6 mm th waterproof ply shall be fixed on two sides and 1 mm th laminate shall be pasted over it with chemical adhesive . The middle 3'-0" high part shall have aluminium grill (2" size Decogrill) fixed .Each Doors shall have 2 nos. handles 250mm long 2 nos. tower bolts etc. all complete. Provision shall be made for passage of electric /data cables and switchboard . T.W molding melamine polished shall be fixed wherever necessary. Bottom 6" width shall have skirting	260 sq ft		
2.	Providing and fixing of Full Ht (8'-6"High)Partly glazed Laminated partition in BM cabin. The under framing shall be of 2"x2" mirindi Wood (anti termite treatment) for under framing at a max .distance of 2' in each direction . 6 mm th waterproof ply shall be fixed on two sides and 1 mm th laminate shall be pasted over it with chemical adhesive . Provision shall be made for passage of electric /data cables and switchboard . T.W molding melamine polished shall be fixed wherever necessary. Bottom 4 " width shall have skirting . Middle 4'-0" height shall have 5 mm th plain glass .	185 sq ft		
3.	P/F 4'-6" high both side Laminated partition near Safe Room . The under framing shall be of 2"x2" mirindi Wood (anti termite treatment) for under framing at a max .distance of 2' in each direction . 6 mm th waterproof ply shall be fixed on both side and 1 mm th laminate shall be pasted over it .	150 sq ft		
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
4.	Providing and Placing in position Officer 's table (size 6'-0"x2'-6") made out of 19 mm thick water proof board with 1.0mm th. laminate on all exposed surfaces (other external surfaces shall be painted with two coats of enamel paint over one	1 no		

5.	<p>coat of primer). It shall have one drawer unit on one side while Provision to be made for pull out tray on slides. The table to be finished in TW/HW lipping and Godrej lock, handles footrest, latches all complete.</p> <p>Providing and erecting on site wooden cash counter. Height shall be 3'-10". The height of writing desk for the cashier shall be 2'-6". The counter top for the clients shall be 1'-0" deep and that of Cashier Desk shall be 2'-6" deep. Both these top shall be made out of block board (Water Proof) 19mm thick with 1.0mm thick laminate (as/shade approved by the Architect) on the cashier's top. The inside desk shall be provided with 16" wide 16" high and 21" deep .Drawers shall have lock of approved make. All the exposed edges of block board shall be provided with 6mm thick teak wood lipping dully polished all complete with footrest. The inside shall be enamel painted 2 coats over primer</p>	10 rft		
6.	<p>Providing and Fixing of vitrified tiles in hall Super Glossy Nano Tech marble effect (Kajaria 6206) on floor of size 2'x2' with suitable adhesive .with 4" high skirting . The work to include cutting ,fixing wastage etc.. The work to include all cutting and wastage etc (Kajaria)</p>	nill	nill	nill
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
7 .	<p>Providing and erecting on site wooden low height counter (as/design). Height of the counter shall be 3'-0" with lower level at 2'6" and upper level (customer top)at 3' ht. . The top and vertical surfaces shall be made of waterproof board 19 mm th. with. 1 mm th. laminate over it. Drawer unit shall be provided on one side while with space for CPU by its side. Pull out tray on slide shall be provided on each counter for keeping keyboard . All the exposed edges shall have 6 mm th. TW lipping duly polished .</p>	10 rft		

	Inside surfaces shall be enamel painted two coats over primer coat . It shall have locks and handles etc.. Provision for wire management shall be made			
8	P&F of Notice Board (size 3'-0"x2'-0") made out of 12mm thick Cellotex Board velvet cloth lining on it. It shall have 1 1/2"x1". Sal wood under framing, sides shall be of 19mm thick water proof Board with 1.0mm thick laminate(As per shade approved by Architect) Front shall have 4.0mm thick glass with sliding arrangement with locking device. All complete.	1 nos		
9.	Providing and Placing in position Branch Manger's table (size 6'-0"x2'-6") made out of 19 mm thick water proof board with 1.0mm th. laminate on all exposed surfaces (other external surfaces shall be painted with two coats of enamel paint over one coat of primer). It shall have one drawer unit on one side while Provision to be made for pull out tray on slides. The table to be finished in TW/HW lipping and Godrej lock, handles footrest, latches all complete.	1 no.		
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
10.	Providing and fixing glass barrier in front of Low height counter (as/profile and design) 12 mm . th polished edged float glass (modiguard) .It shall have Laminated commercial board support (as/shape approved by the architect)to hold the glass from sides and top (optional) ..Height of the glass barrier to be 2'-0".	20 sq ft		
11.	Pop punning on wall and ceiling in banking hall making the surface smooth to the satisfaction of the architect after scratching and sand papering the existing surface.	4200 sq ft		
12.	Painting of walls and ceiling in baking hall with acrylic emulsion paint (Two Coats) over primer coat with roller finish As/shade approved to the	4200 sq ft		

	satisfaction of the Bank /Architect			
13	Providing and Fixing Of anodized Aluminum Grill 2” dia .over Cash Cabin	70 sq ft		
14.	P&F 7 lever Night Latch lock for cash cabin.	2 no.		
15.	P & F Hydraulic door closer of approved quality for doors.	3 no		
16.	Providing and fixing of,8’-6”High paneling on pillars in the hall . The under framing shall be of 50 mmx50 mm Mirindi Wood (anti termite treatment) for under framing at a max .distance of 2’ in each direction . 6 mm th waterproof ply shall be fixed on one side and 1 mm th laminate shall be pasted over it with chemical adhesive . Provision shall be made for passage of electric /data cables and switchboard . Bottom 4 “ width shall have skirting	315 sq ft		
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
17 .	P & F in position double leaf Anodized aluminum entrance door made of 2 mm thick sheet microns) . All member shall be of 100x45 mm section with 8 mm thick clear float glass including 4” dia.2 nos. handles 10” long 3 nos. tower bolts, floor spring 2 nos. locks etc. complete.	143 sq ft		
18.	Providing and Placing in position 10 mm th Plain Glass on BM’ Table (size 6’x2’-6”)with size matching to the Table . The work to include Bevelled Edges complete to the satisfaction of the Bank	15 sq ft		
19.	Providing and Placing in position side unit. Made with 19 mm th waterproof board for all members with 1mm th laminate over it on all exposed surfaces . Inner surface shall have enamel paint two coats over priming coat and putty . Sliding shutter shall be made out of 8.0mm thick water proof ply with 1.0mm thick teak wood/hard wood lipping, hinges handles, locks, latches, etc. all complete size shall be (3’-6”x1’-6”x2’-3”).	1 no.		
20.	P&F of customer’s desk made out of 19mm thick commercial Board with 1.0mm thick laminated of size 3’-0”x 2’-	1 no		

21.	<p>0" all complete with slip stocks.</p> <p>Providing and placing in position Printer unit of size 900x450mm x675 mm . The top and ,vertical sides./dividers ,skirting etc shall be made of 19 mm th water proof board . with 1mm th laminate as/shade approved . on all exposed surfaces . A slit of required dimension in the top shall be provided to allow the movement of printer paper . All ex[posed edges of water proof ply shall have teak wood lipping melamine polished complete to the satisfaction of the architect .</p>	1 no		
-----	---	------	--	--


No.	Particulars	Qty./Uni	Rate		Amount	
			Rs.	P.	Rs.	P.
22.	P & F complaint/suggestion box (1'6"x1'-6"x6") made out of 19mm th. Waterproof board with 1.0mm th. laminate on all exposed surfaces. Other internal surfaces shall be painted with two coats of enamel paint over one coat of primer. All exposed surfaces to be treated with T.W. lipping.	1no.				
23.	Etching work on glass with chemicals (as/design and profile) as/where required. The rates shall include cost of all materials ,labor ,T& P ,wastage ,transportation etc required for proper completion of the work .	50 sq ft				
24.	P/F in position floor mounted storage cabinets 7'-0" high with hinged shutters having vertical divider at 450 mm to 600 mm aprox and horizontal shelves . It shall be made out of 19 mm th water proof board with1mm th laminate as/shade approved) on all exposed surfaces . It shall have 6mm th water proof ply on the back .Every Cabinet shall have open able shutters . The shutters shall have locks ,handles , magnetic catchers etc	185 sq ft				
25.	Supplying and placing in position settee 3 seater of size 6'x1'-6"x1'-6' made out of19 mm board with cushioned seat made out of 3" th foam covered with cloth as/shade approved . The outer surface of the settee shall have 1 mm th laminate over board with TW lipping at	3 no				

	all cut edges duly polished . The inner surface shall be enamel painted over primer coat			
--	--	--	--	--

No.	Particulars	Qty./Unit	Rate Rs. P.	Amount Rs. P.
26.	Providing and Placing in position Officer 's table (size 5'-0"x2'-6") in continuation to the low height counter near Cash Cabin made out of 19 mm thick water proof board with 1.0mm th. laminate on all exposed surfaces (other external surfaces shall be painted with two coats of enamel paint over one coat of primer). It shall have one drawer unit on one side while Provision to be made for pull out tray on slides. The table to be finished in TW/HW	1 no		

	lipping and Godrej lock, handles footrest, latches all complete.			
27.	Providing and Fixing Mortice Lock for doors	2 nos.		
28.	Buy Back of existing counter and partition (to be deducted)	1 job	Rs 5000/job	- 5000-0

TOTAL :Rs -----

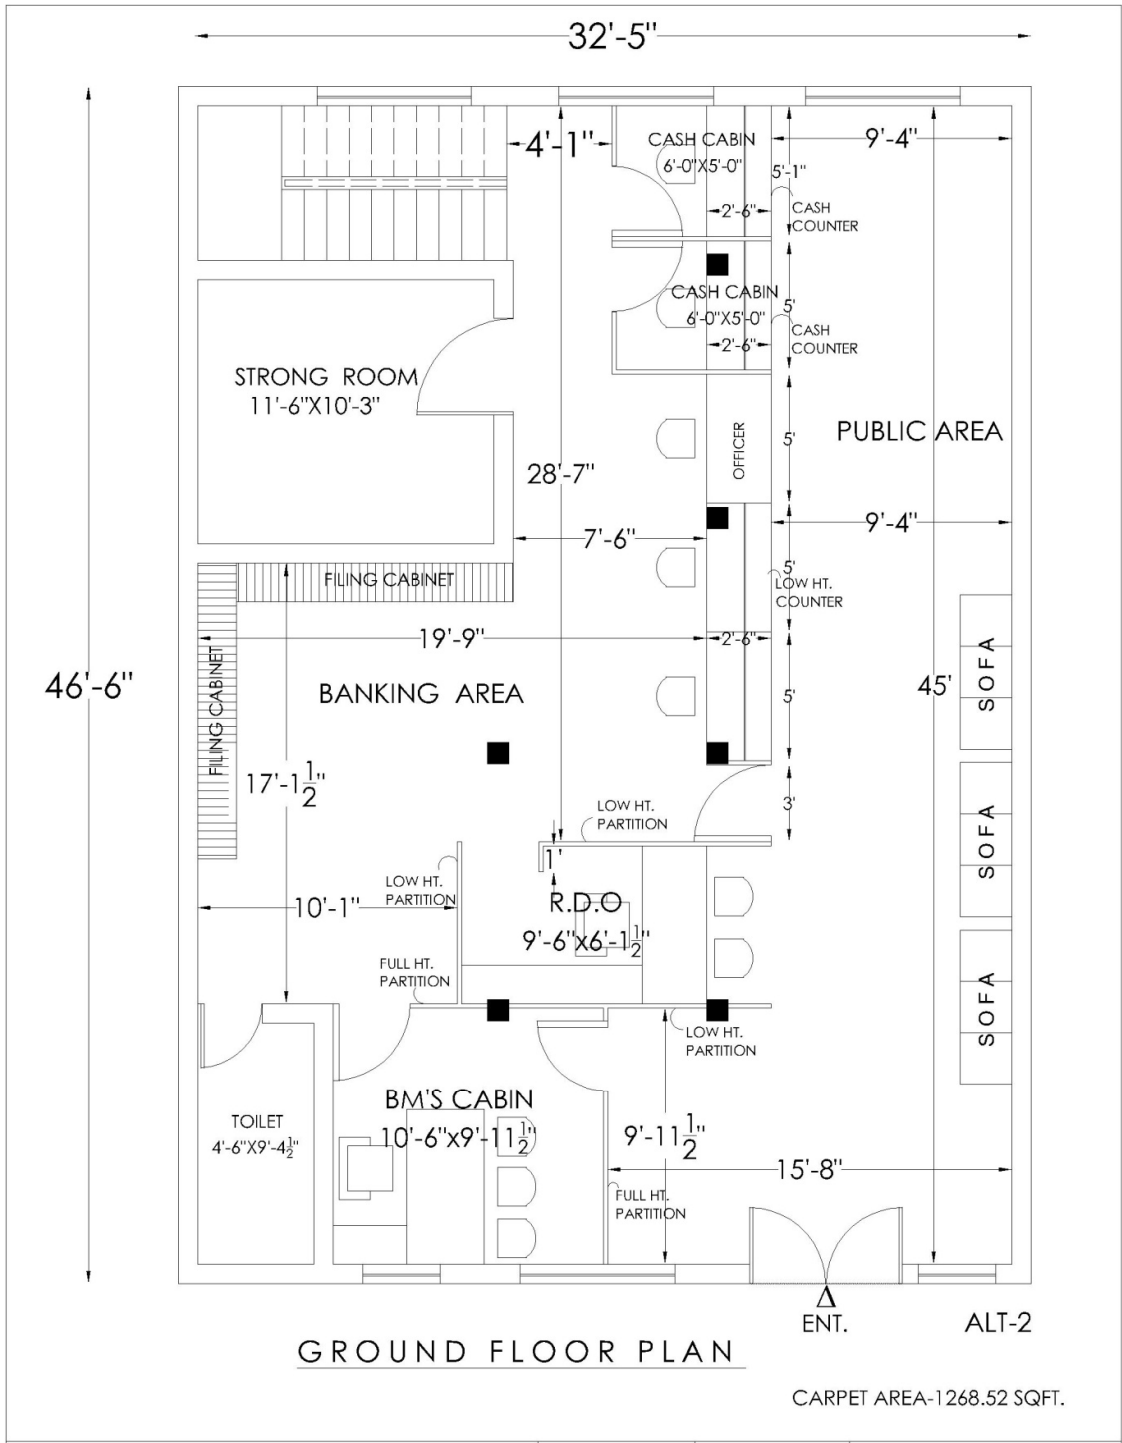

PROPOSED FURNISHING PLAN FOR UBI PAWAI AZAMGARH.	DRAWN BY		ARCHITECT ATUL RAI (B. Arch.) PRATISHILP D - 59 / 72 CH. MAHMOOR GANJ SIGRA ROAD VARANASI PH. NO. 2363969
	SCALE		
	DATE 13-09-2013		

Material Specification for Electrical Work

Tube Light	:	Phillips
Switches	:	MK wrapround / Legrand (Mosaic)
Wire/Cable	:	Anchor/Finolex/National /CCI
Fan	:	Crompton Greaves (high Breeze)
Exhaust Fan	:	Almorand/Khaitan
M. C. B. / D. B./MCCB	:	MDS/Schneider/Siemens
Main Switch	:	GE/L&T
Change Over	:	GE/L&T/ABB
PVC Conduit	:	AKG/ Sieko

**Schedule Of quantities For Electrical Work of Rajaganj Branch of Union
Bank of India Azamgarh**

Sl. No.	Particulars	Qty./Unit	Rate per		Amount	
			Rs.	P.	Rs.	P.
1.	S/F of plug socket board consisting of 3 plug 5 Amp, three pin, three switch and one indicator with 7/22 separate circuit wiring for computer.	8 Nos.				
2.	Supplying and executing earthing work for Light fan/ computer with 450x450x6mm copper plate and 8 SWG copper wire provision to be made for CI cover manhole with locking device and 20mm of watering pipe with tunnel. Two plate to be buried with its top edge at a depth of atlas 2500mm from ground level with 15cm. Thick packing of characoal powder and salt as per ISI recommendation.	2no				
3.	Supplying and fixing mirror optic Double Tube light Fitting (2x 36 watt) The work to include wiring 1.5 sq mm and modular switches complete in all respect as /design. Including electronic choke (Model No BPS-518/236 HPF Philips make)	15 Nos.				
4.	S/W 5 Amp. Plug point with 2.5 sq mm copper wire in counter with continuous earthing wire complete in all respect with modular switches /socket.	15 Nos.				
5	S/F of wall bracket light points with 18 watt CFL fittings including 3/20 wiring and modular switches	5 no.				


Sl. No.	Particulars	Qty./Unit	Rate per		Amount	
			Rs.	P.	Rs.	P.
6.	S/F of light point (Tube Light Fittings 40 watt with all accessories) in 1.5 sq mm wiring complete in all respect including modular switches .	9 No.				

- | | | |
|-----|---|--------|
| 7. | S/F of 6 way DB with 32/25 Amp. DP, MCB and 4 Nos. 10 Amp SP, MCB for computer distribution. | 1 No. |
| 8. | S/F of two pole MCB with Box one 63 Amp. Other 32 Amp. for UPS I/O. | 2 Nos. |
| 9. | S/F of 15 Amp plug point with 3/20 wiring including modular switches with continuous circuit wiring. | 6 Nos. |
| 10 | Fixing of existing ceiling fans after cleaning and polishing with hooks in rooms with adding rod of suitable length wherever necessary including 1.5 sq mm wiring and modular switches and regulator | 2 nos |
| 11. | Supplying and wiring for Telephone point with twisted annealed, copper conductor PVC insulated and PVC sheathed telephone wire with socket in 14 SWG with all the accessories in concealed manner with 2-pin socket in suitable size of MS box. | 1No. |
| 12. | Supplying and Fixing of ceiling fans (1200dia) with hooks in hall with adding rod of suitable length wherever necessary including 3/20 wiring and modular switches | 11 no. |

Sl. No.	Particulars	Qty./Unit	Rate per Rs. P.	Amount Rs. P.
13.	Supplying and fixing of Call Bell in BM's cabin including wiring etc.	1 no		
14.	S/F of 63 Amp. Main switch	1 No.		
15.	S/F of 63 Amp. Change over switch	1 No.		
16.	S/F of 32 Amp. Change over switch	1 no		
17.	S/F of Porcelain Kit Kat 63 Amp.	3 Nos.		

- | | | |
|-----|---|--------|
| 18. | Supplying and Fixing of cabin fans (300Dia) in cash cabin/sorting cabin in 3/20 wiring and switches. | 1No. |
| 19. | Supplying and Fixing of circuit wiring for computer in 3/20 copper wire. | 8 Nos. |
| 20. | Supplying and Fixing of circuit wiring for lights and fans in 3/20 copper wire computer in all respect. | 8 no |
| 21. | Supply and fixing of Main line cable work from Pole to DB in hall with 25 mm x 3 ½ core cable with wiring. (Length to be as/site condition) | 70 mtr |
| 22. | Supplying and Fixing of exhaust fan in toilet/hall 15 inch dia 1.5 sq mm wiring and modular switches. | 2 no |
| 23. | Sub main wiring of UPS input and UPS output power supply with 2 no 6 sq mm + 1 No. 4 sq mm copper flexible wire in PVC conduit pipe .(payment as/actual length on site) | 35 mtr |
| 24. | Sub main Wiring of power supply from Main to Distribution Board with 4 nos 10 sq mm copper flexible wire in PVC conduit pipe . (payment as/actual length on site) | 30 mtr |

Total : Rs. -----

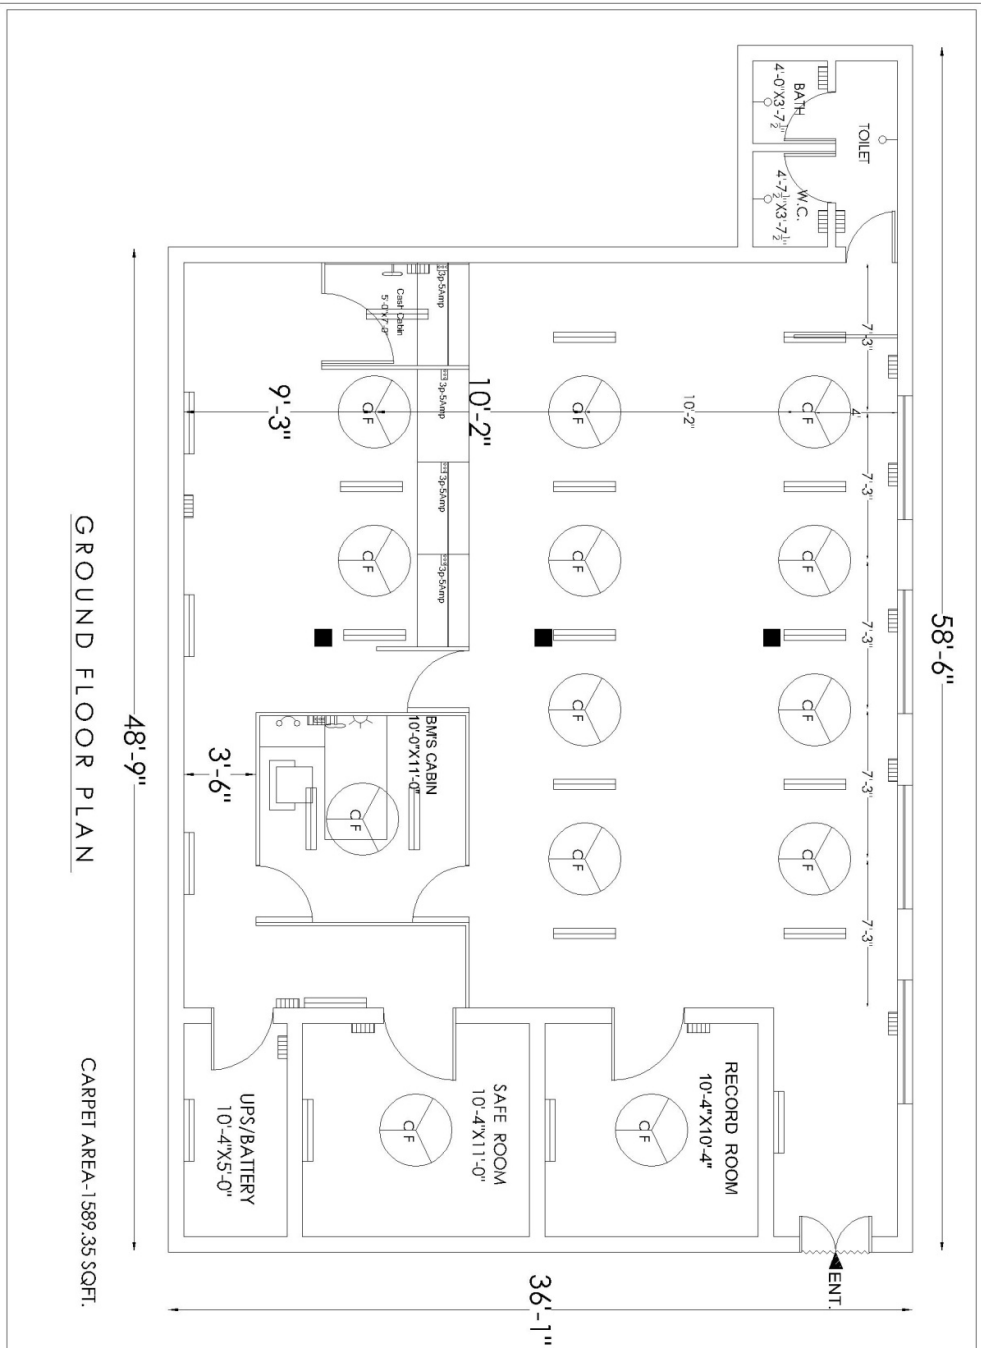

GROUND FLOOR PLAN

CARPET AREA - 1589.35 SQFT.

SCHEDULE

1	Tube Light	T.L	
2	Switch Board	S.B	
3	Power Point	P.P	
5	Wall Mounted Fan	wmf	
6	Wall Bracket Point	wbp	
7	Computer Point	3p Stamp	
8	Ceiling Fan	C.F	
9	Telephone	TEL	

PROPOSED ELECTRICAL PLAN FOR UNION BANK OF INDIA AT RAJAGANJ BRANCH AZAMGARH

ELECTRICAL PLAN

SCALE	
DATE	13-09-2013

ARCHITECTS
PRAJITI SHILP
 D 59/ 72 CH/MAHMOORGANJ
 SIGRA ROAD VARRANASI
 PH.-2363969

MATERIAL SPECIFICATIONS FOR FURNISHING WORK OF BRANCH

Board/Ply	:	Green, Century, Duro
Laminate (FOR ATM)	:	Century (silver 1001 BR , Red -194) , Signature Kitmica , Newmica , Green lam(9001 Silver) conforming to IS 2046-1995
Laminate	:	Sunmica , Greelam , Century
Aluminium Section	:	Hindalco /JINDAL
Door Closure	:	Hyper, Ritz, Everite (ISI marked)
Glass	:	Modiguard, Saint Gobain
Adhesive	:	Pidilite (Fevicol)
Locks/Night Latch	:	Godrej
Paint	:	Asian Paint,Nerolac
Floor Spring	:	Hyper, Ritz, Everite (ISI marked)
Vertical Blinds	:	Vista
Flooring	:	Kajaria

Estimate for furnishing work of Rajaganj Branch of Union Bank Of India Azamgarh

No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
1.	Providing and fixing of partly aluminium grill,8'-6"High Laminated partition in Cash Cabin . The under framing shall be of 50mmx40 mm mirindi (anti termite treatment) for under framing at a max .distance of 2' in each direction . 6 mm th waterproof ply shall be fixed on two sides and 1 mm th laminate shall be pasted over it with chemical adhesive . The middle 3'-0" high part shall have aluminium grill (2" size Decogrill) fixed .Each Doors shall have 2 nos. handles 250mm long 2 nos. tower bolts etc. all complete. Provision shall be made for passage of electric /data cables and switchboard . T.W molding melamine polished shall be fixed wherever necessary. Bottom 6" width shall have skirting	130 sq ft	270/ sq ft	35100-00
2.	Providing and fixing of Low Ht (4'-6"High)Partly glazed Laminated partition in BM cabin. The under framing shall be of 2"x2" mirindi Wood (anti termite treatment) for under framing at a max .distance of 2' in each direction . 6 mm th waterproof ply shall be fixed on two sides and 1 mm th laminate shall be pasted over it with chemical adhesive . Provision shall be made for passage of electric /data cables and switchboard . T.W molding melamine polished shall be fixed wherever necessary. Bottom 6 " width shall have skirting . Upper 1'-6" height shall have 5 mm th plain glass .	195 sq ft	270/sq ft	52650-00
3.	P/F 8'-6" high both side Laminated partition near Safe Room . The under framing shall be of 2"x2" mirindi Wood (anti termite treatment) for under framing at a max .distance of 2' in each direction . 6 mm th waterproof ply shall be fixed on both side and 1 mm th laminate shall be pasted over it .	145 sq ft	270/sq ft	39150-0
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.

4.	Providing and Placing in position Officer's table (size 4'-6"x2'-6") in continuation to the low height counter made out of 19 mm thick water proof board with 1.0mm th. laminate on all exposed surfaces (other external surfaces shall be painted with two coats of enamel paint over one coat of primer). It shall have one drawer unit on one side while Provision to be made for pull out tray on slides. The table to be finished in TW/HW lipping and Godrej lock, handles footrest, latches all complete.	1 no	7000/no	7000-00
5.	Providing and erecting on site wooden cash counter. Height shall be 3'-10". The height of writing desk for the cashier shall be 2'-6". The counter top for the clients shall be 1'-0" deep and that of Cashier Desk shall be 2'-6" deep. Both these top shall be made out of block board (Water Proof) 19mm thick with 1.0mm thick laminate (as/shade approved by the Architect) on the cashier's top. The inside desk shall be provided with 16" wide 16" high and 21" deep .Drawers shall have lock of approved make. All the exposed edges of block board shall be provided with 6mm thick teak wood lipping dully polished all complete with footrest. The inside shall be enamel painted 2 coats over primer	5 rft	2000/rft	10000-00
6.	Providing and Fixing of vitrified tiles in hall Super Glossy Nano Tech marble effect (Kajaria 6206) on floor of size 2'x2' with suitable adhesive .with 4" high skirting . The work to include cutting ,fixing wastage etc.. The work to include all cutting and wastage etc (Kajaria)	Nil	Nil	Nil
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
7 .	Providing and erecting on site wooden low height counter (as/design). Height of the counter shall be 3'-0" with lower level at 2'6" and upper level (customer top)at 3' ht. . The top and vertical surfaces shall be made of waterproof board 19 mm th. with. 1 mm th. laminate	9 rft	1800/rft	16200-00

	<p>over it. Drawer unit shall be provided on one side while with space for CPU by its side. Pull out tray on slide shall be provided on each counter for keeping keyboard . All the exposed edges shall have 6 mm th. TW lipping duly polished . Inside surfaces shall be enamel painted two coats over primer coat . It shall have locks and handles etc.. Provision for wire management shall be made</p>			
8	<p>P&F of Notice Board (size 3'-0"x2'-0") made out of 12mm thick Cellotex Board velvet cloth lining on it. It shall have 1 1/2"x1". Sal wood under framing, sides shall be of 19mm thick water proof Board with 1.0mm thick laminate(As per shade approved by Architect) Front shall have 4.0mm thick glass with sliding arrangement with locking device. All complete.</p>	1 nos	2500/no	2500-00
9.	<p>Providing and Placing in position Branch Manger's table (size 6'-0"x2'-6") made out of 19 mm thick water proof board with 1.0mm th. laminate on all exposed surfaces (other external surfaces shall be painted with two coats of enamel paint over one coat of primer). It shall have one drawer unit on one side while Provision to be made for pull out tray on slides. The table to be finished in TW/HW lipping and Godrej lock, handles footrest, latches all complete.</p>	1 no.	10000/no	10000-00
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
10.	<p>Providing and fixing glass barrier in front of Low height counter (as/profile and design) 12 mm . th polished edged float glass (modiguard) .It shall have Laminated commercial board support (as/shape approved by the architect)to hold the glass from sides and top (optional) ..Height of the glass barrier to be 2'-0".</p>	18 sq ft	140/ sq ft	2520-00
11.	<p>Pop punning on wall and ceiling in banking hall making the surface smooth to the satisfaction of the architect after scratching and sand papering the existing</p>	3000 sq ft	5/sq ft	15000-00


	surface.			
12.	Painting of walls and ceiling in baking hall with acrylic emulsion paint (Two Coats) over primer coat with roller finish As/shade approved to the satisfaction of the Bank /Architect	4600 sq ft	8/sq ft	36800-00
13	Providing and Fixing Of anodized Aluminum Grill 2” dia .over Cash Cabin	40 sq ft	135 /sq ft	5400-00
14.	P&F 7 lever Night Latch lock for cash cabin.	1 no.	1200/no	1200-00
15.	P & F Hydraulic door closer of approved quality for doors.	1 no	1400/no	1400-00
16.	Providing and fixing of,8’-6”High paneling on pillars in the hall . The under framing shall be of 50 mmx50 mm Mirindi Wood (anti termite treatment) for under framing at a max .distance of 2’ in each direction . 6 mm th waterproof ply shall be fixed on one side and 1 mm th laminate shall be pasted over it with chemical adhesive . Provision shall be made for passage of electric /data cables and switchboard . Bottom 4 “ width shall have skirting	155 sq ft	150/sq ft	23250-0
No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
17 .	P & F in position double leaf Anodized aluminum entrance door made of 2 mm thick sheet microns) . All member shall be of 100x45 mm section with 8 mm thick clear float glass including 4” dia.2 nos. handles 10” long 3 nos. tower bolts, floor spring 2 nos. locks etc. complete.	90 sq ft	260/sq ft	23400-00
18.	Providing and Placing in position 10 mm th Plain Glass on BM’ Table (size 6’x2’-6”)with size matching to the Table . The work to include Bevelled Edges complete to the satisfaction of the Bank	15 sq ft	125/sq ft	1875-0
19.	Providing and Placing in position side unit. Made with 19 mm th waterproof board for all members with 1mm th laminate over it on all exposed surfaces . Inner surface shall have enamel paint two coats over priming coat and putty . Sliding shutter shall be made out of 8.0mm thick water proof ply with 1.0mm thick teak	1 no.	4500/no	4500-00

20.	<p>wood/hard wood lipping, hinges handles, locks, latches, etc. all complete size shall be (3'-6"x1'-6"x2'-3").</p> <p>P&F of customer's desk made out of 19mm thick commercial Board with 1.0mm thick laminated of size 3'-0"x 2'-0" all complete with slip stocks.</p>	1 no	2500/ no	2500-00
21.	<p>Providing and placing in position Printer unit of size 900x450mm x675 mm . The top and ,vertical sides./dividers ,skirting etc shall be made of 19 mm th water proof board . with 1 mm th laminate as/shade approved . on all exposed surfaces . A slit of required dimension in the top shall be provided to allow the movement of printer paper . All ex[posed edges of water proof ply shall have teak wood lipping melamine polished complete to the satisfaction of the architect .</p>	1 no	4000/ no	4000-00

No.	Particulars	Qty./Uni	Rate Rs. P.	Amount Rs. P.
-----	-------------	----------	----------------	------------------

22.	P & F complaint/suggestion box (1'6"x1'-6"x6") made out of 19mm th. Waterproof board with 1.0mm th. laminate on all exposed surfaces. Other internal surfaces shall be painted with two coats of enamel paint over one coat of primer. All exposed surfaces to be treated with T.W. lipping.	1no.	1500/no	1500-00
23.	Etching work on glass with chemicals (as/design and profile) as/where required. The rates shall include cost of all materials ,labor ,T& P ,wastage ,transportation etc required for proper completion of the work .	50 sq ft	80 /sq ft	4000-00
24.	P/F in position floor mounted storage cabinets4'-6" high with hinged shutters having vertical divider at 450 mm to 600 mm aprox and horizontal shelves . It shall be made out of 19 mm th water proof board with1mm th laminate as/shade approved) on all exposed surfaces . It shall have 6mm th water proof ply on the back .Every Cabinet shall have open able shutters . The shutters shall have locks ,handles , magnetic catchers etc	36 sq ft	550/sq ft	19800-0
25.	Supplying and placing in position settee 3 seater of size 6'x1'-6"x1'-6' made out of19 mm board with cushioned seat made out of 3" th foam covered with cloth as/shade approved . The outer surface of the settee shall have 1 mm th laminate over board with TW lipping at all cut edges duly polished . The inner surface shall be enamel painted over primer coat	3 no	7500/no	22500-0
26.	Buy Back of existing counter and partition (to be deducted)	1 job	Rs 5000/job	- 5000-0

TOTAL :Rs 337245-0

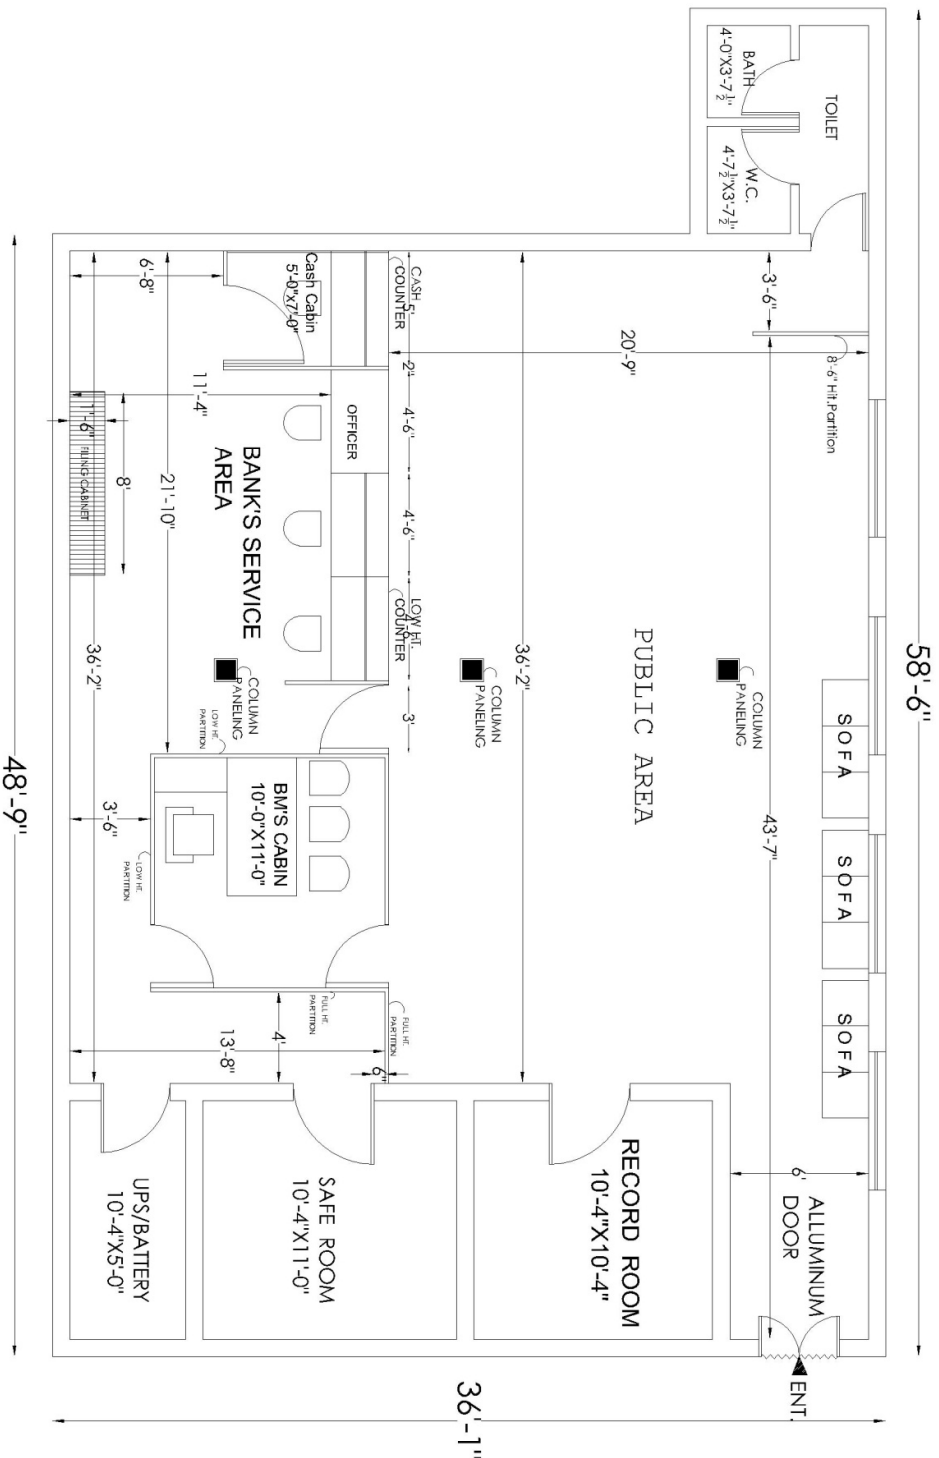

PROPOSED FURNISHING PLAN FOR
UBI RAJAGANJ AZAMGARH.

DRAWN BY	
SCALE	
DATE	13-09-2013



ARCHITECT ATUL RAI [B. Arch.]
PRATISHILP
D - 59 /72 CH. MAHMOOD GANJ
SGRA, ROAD VARANASI
PH. NO. 2263989