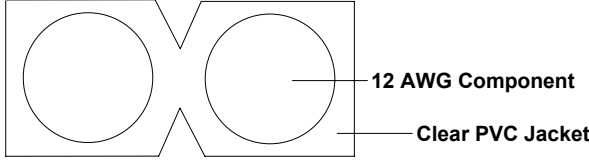
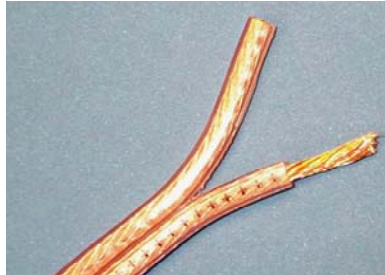


Product Specification Sheet

Catalog Number: 12-2C-ZIP-CLR

Construction Detail	Product Illustration
	
Physical Construction	Description
<p>Component 1: 12 AWG 7x60/38 AWG oxygen free copper conductors PVC Insulation: .040-inch nominal thickness</p>	<p>Zip style interconnect speaker wire for distributed audio applications and installations in non-UL rated applications.</p>
	Color Code
	<p>Insulation is clear One leg is printed "+" for positive One leg is printed "-" for negative</p>
	Electrical Specifications
	<p>12 AWG: DCR: 1.45 Ω per 1000 feet Capacitance: 17.5 pF per foot Voltage: 150V RMS Temperature: 0°C to 60°C</p>
	Regulatory Specifications
<p>Final assembly: 2 of component 1 Parallel lay (Zip cord construction) Final construction: .177-inch x.354-inch nominal OD Product Print Legend on one Leg: ++++++LIBERTY HIGH DEFINITION 12 AWG OFC SPEAKER CABLE ++++++ , Product Print Legend on the other Leg: "-----"</p>	<p>This product is not rated. Not for in-wall use.</p>
Specification Control	Product Information
<p>Revision Date: 01/03/1997</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Clear</p> <p>Packaging: 500 foot plastic spools</p>

Form Revision Date: 04/15/2004