

Backlash-free Metal Bellow Couplings

You Can Rely On Us!

GERWAH



GERWAH®

GERWAH The Company

Gerwah GmbH was founded in 1980. The idea of new, innovative products has made Gerwah a recognized partner in the machine tool industry. We are a dynamic, spirited and fast growing company with clear goals and open mind that is reflected in the architecture of our new headquarters.

Our Goals

- To add value for our customers by providing innovative product solutions
- To develop solutions in cooperation with our customers
- Satisfied customers

Our Advantages

- Know-how, innovative designs and cutting edge manufacturing plants
- Customer oriented employees
- Technical assistance and service, both locally and internationally
- Qualified sales force
- Economic stability
- Worldwide presence with subsidiaries and dealers



Our new headquarters in Grosswallstadt, Germany



GERWAH - You Can Rely On Us!

We are certified according to DIN EN ISO 9001:2000 (Cert.-No. 0063-D)

GERWAH®

Backlash-free Metal Bellow Couplings Series

Applications: Backlash-free metal bellow couplings are used in the area of the machine tool industry, where a torque or a rotary motion has to be transmitted from shaft to shaft in highest accuracy of angle:

- Pumps with axial and vertical drives
- High dynamic portal drives
- Spindle lifting units
- Linear units
- Packaging machines
- Machine tools
- Special machines



Metal bellow coupling with radial set screws; 0,1-10 Nm
Technical data page 4



Metal bellow coupling with clamping hubs; 0,4-10 Nm
Technical data page 5



Metal bellow coupling with clamping hubs and shorter length; 18-500 Nm
Technical data page 6



Metal bellow coupling with clamping hubs; 18-500 Nm
Technical data page 7



Metal bellow coupling with inner conical hub; 30-5000 Nm
Technical data page 8



Metal bellow coupling with outer conical hub; 18-5000 Nm
Technical data page 9



Metal bellow coupling with clamping hubs; 0,2-300 Nm
Technical data page 10



Metal bellow Coupling with flange; 18-5000 Nm
Technical data page 11

Characteristics of the metal bellow couplings

- Backlash-free transmission of torque
- High torsional stiffness, precision of transmission of rotational angle
- Different torsional stiffness
- Backlash-free shaft connection
- Small dimensions, low moment of inertia
- Metal bellow made of stainless steel
- Simple and operationally safe assembly
- Compensation for radial, axial and angular misalignment
- Free of wear, maintenance-free, no standstill period
- Not sensitive to temperatures between -30°C and +100°C, higher temperature ranges available on request
- Economical and friendly due to modular system
- Nominal moments between 0,1 – 5000 Nm


The details in this catalogue describe the products and do not represent guaranteed qualities. The user is responsible for checking

and defining the technical characteristics of his particular application. We reserve the right to make changes at any time without notice.

We cannot be held responsible for any omissions or printing errors. Deliveries are based on individual detailed contractual agreements.

GERWAH®

Backlash-free Metal Bellow Coupling Series EKN miniature

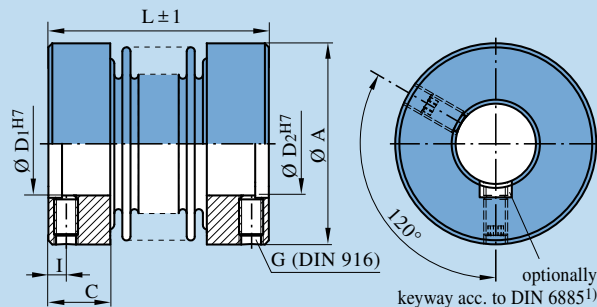

Technical data series EKN

Type			4	9	15	20	45	100
Nominal torque	(Nm)	T _{KN}	0,4	0,9	1,5	2	4,5	10
Misalignment	(mm)	radial ΔK_r	0,1 / 0,15 / 0,2	0,1 / 0,15 / 0,2	0,1 / 0,15	0,1 / 0,2 / 0,25	0,1 / 0,2	0,15 / 0,25
	(mm)	axial ΔK_a	0,2 / 0,3 / 0,4	0,2 / 0,3 / 0,4	0,25 / 0,4	0,3 / 0,4 / 0,5	0,3 / 0,5	0,4 / 0,5
	(degree)	angular ΔK_w	1,2 / 2	1,2 / 2	1,2 / 2	1,2 / 2	1,2 / 2	1,2 / 2
Torsional stiffness	(Nm/rad)	C _{T dyn}	250 / 190 / 150	500 / 380 / 300	750 / 700	1500 / 1300 / 1000	6500 / 4000	8100 / 6700
Moment of inertia	(g cm ²)	J	2,0	2,0 / 2,3 / 2,6	7,5 / 8	14 / 16 / 17	68 / 73	200 / 220
Tightening torque of the retaining screws	(Ncm)	M _A	50	50	150	50	300	300
Weight	(g)	m	6	6 / 7 / 8	17 / 19	22 / 24 / 26	54 / 58	104 / 114

Dimensions series EKN

Type			4	9	15	20	45	100
Ø A	(mm)	max.	15	15	20	25	32	40
C	(mm)		6	6	8	8	12	12
L	(mm)	±1	20 / 23 / 26	21 / 25 / 28	25 / 30	27 / 33 / 37	39 / 48	44 / 54
D1/D2	(mm)	H7 min. - max.	3-8	3-8	3-10	3-12	6-16	6-19
G		(DIN 916)	M3	M3	2xM4	2xM3	2xM6	2xM6
I	(mm)		2	2	3	2,2	4	4


Hub bores	Standard quality of fitting H7 Custom bores on request	
Standard bores	EKN 4-15	Ø 6H7
	EKN 20	Ø 6H7 and 10H7
	EKN 45-100	Ø 10H7
Materials	Hubs made of aluminium Metal bellow made of stainless steel Stainless steel version also available	
Rotational speed	15.000 min ⁻¹	
1) Tolerance of keyway; standard JS9		

Ordering data

EKN 20/27	-	6,35 ^{H7}	-	10 ^{H7}	-	xxx
Type	length					
Bore diameter D1						
Bore diameter D2						
Further details e.g. material, keyway						

GERWAH®

Backlash-free Metal Bellow Coupling Series DKN miniature

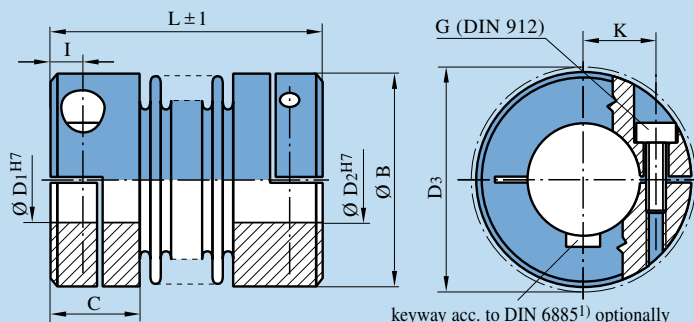

Technical data series DKN

Type			4	9	15	20	45	100
Nominal torque	(Nm)	T _{KN}	0,4	0,9	1,5	2	4,5	10
Misalignment	(mm)	radial ΔK_r	0,1 / 0,15 / 0,2	0,1 / 0,15 / 0,2	0,1 / 0,15	0,1 / 0,2 / 0,25	0,1 / 0,2	0,15 / 0,25
	(mm)	axial ΔK_a	0,2 / 0,3 / 0,4	0,2 / 0,3 / 0,4	0,25 / 0,4	0,3 / 0,4 / 0,5	0,3 / 0,5	0,4 / 0,5
	(degree)	angular ΔK_w	1,2/2	1,2/2	1,2/2	1,2/2	1,2/2	1,2/2
Torsional stiffness	(Nm/rad)	C _{T dyn}	250 / 190 / 150	500 / 380 / 300	750 / 700	1500/1300/1000	6500 / 4000	8100 / 6700
Moment of inertia	(g cm ²)	J	2,6	2,6 / 2,9 / 3,2	11/ 12	25 / 27 / 28	98 / 103	231 / 250
Tightening torque of the retaining screws	(Ncm)	M _A	30	30	80	100	300	300
Weight	(g)	m	9	9 / 10 / 11	22 / 24	36 / 38 / 40	74 / 78	120 / 130

Dimensions series DKN

Type			4	9	15	20	45	100
Ø B	(mm)		15,5	15,5	20	25	32,5	40,5
C	(mm)		7	7	9	12	14	14,5
L	(mm)	±1	21 / 24 / 28	23 / 26 / 30	26 / 30	32 / 38 / 42	41 / 50	47 / 57
I	(mm)		2,4	2,4	3	3,5	4,5	5
D1/D2	(mm)	H7 min. - max.	3-6,5	3-6,5	3-10	3-12	6-16	6-19
D3	(mm)	Clearance diameter	17,5	17,5	21	27	34	41,5
G		(DIN 912) 8.8	M2	M2	M2,5	M3	M4	M4
K	(mm)		5,6	5,6	7	9	11,5	15,5

Hub bores	Standard quality of fitting H7 Custom bores on request
Standard bores	DKN 4-15 Ø 6H7 DKN 20 Ø 6H7 and 10H7 DKN 45-100 Ø 10H7
Materials	Hubs made of aluminium Metal bellow made of stainless steel Stainless steel version also available
Rotational speed	15.000 min ⁻¹
1) Tolerance of keyway; standard JS9	

Ordering data


DKN 20/42	-	6,35 ^{H7}	-	10 ^{H7}	-	xxx
Type	length					
Bore diameter D1						
Bore diameter D2						
Further details e.g. material, keyway						

GERWAH®

Backlash-free Metal Bellow Coupling Series AKN

with increased torsional stiffness

with clamping hub

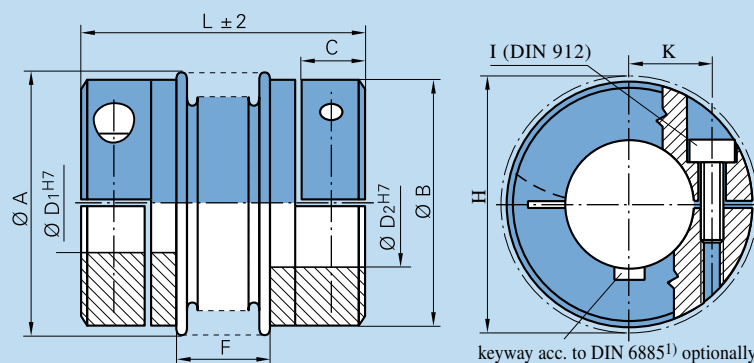

Technical data series AKN

Type		18	30	60	80	150	200	300	500
Nominal torque (Nm)	T _{KN}	18	30	60	80	150	200	300	500
Torsional stiffness (10 ³ Nm/rad)	C _{Tdyn}	8	35	75	130	150	170	500	680
Radial spring stiffness (N/mm)	C _r	200	720	1100	1200	2000	2500	6300	8800
Axial spring stiffness (N/mm)	C _a	50	50	90	80	150	150	280	100
Moment of inertia (10 ⁻³ Kg·m ²)	J	0,08	0,1/0,16	0,3/0,5	1,4/2,3/2,8	1,4/2,3/2,8	2,6/4,2	4,6/6,2	9
Tightening torque of the retaining screws (Nm)	M _A	6	15/12	40/30	60/55/50	80/70/50	100/80	110/90	145
Weight (approx. kg)	m	0,2	0,2/0,3	0,5/0,6	1,7/2,1/2,3	1,7/2,1/2,3	2,5/3,3	3,4/4,1	4,8
Max. approved misalignment (mm)	radial ΔK _r	0,2	0,1	0,1	0,2	0,2	0,2	0,2	0,2
	axial ΔK _a	0,5	0,4	0,4	0,4	0,4	0,4	0,4	0,5
	angular ΔK _w	1,5	1	1	1	1	1	1	1
Max. rotating speed at V= 30 m/s (min ⁻¹)	n _{max}	12700	10200	8600	6800	6800	6300	5900	4900

Dimensions series AKN

Type		18	30	60	80	150	200	300	500
L	(mm) ±2	63	65	78	91	91	100	102	110
Ø A	(mm) max.	46	56	66	83	83	90	110	122
Ø B	(mm)	45	47/56	57/66	76/80/84	76/80/84	80/90	91/96	110
C	(mm)	12	15	19,5	21,5	21,5	25,5	26	29,5
D ₁ ^{H7} /D ₂ ^{H7 2)}	(mm) min.	10	10/20	14/23	20/28/35	20/28/35	25/32	32/40	40
	(mm) max.	25	20/25	23/35	28/35/40	28/35/40	32/42	40/45	60
F	(mm)	24	16	20	24	24	24	27	28
I		M5	M6	M8	M10	M10	M12	M12	M12
K	(mm)	17,5	16/20	20/24	24/27/28	24/27/28	26/31	32/35	40
H	(mm) Clearance diameter	48	56	70	84	84	93	102	115

Hubs 18 - 60 made of aluminium, hubs 80 - 500 made of steel; other materials available on request

1) Tolerance of keyway; standard JS9

2) Smaller diameters possible for lower torque of transmission

3) Stainless steel version also available


Ordering data

AKN 150 - 30 ^{H7} - 35 ^{H7} - xxx
Type
Bore diameter D ₁
Bore diameter D ₂
Further details e.g. material, keyway

GERWAH®

Backlash-free Metal Bellow Coupling Series AKD

with clamping hub

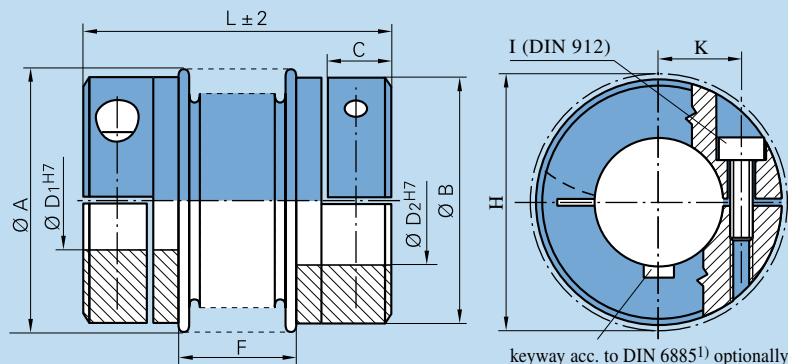

Technical data series AKD

Type		18	30	60	80	150	200	300	500
Nominal torque (Nm) T _{KN}		18	30	60	80	150	200	300	500
Torsional stiffness (10 ³ Nm/rad) C _{Tdyn}		6	25	50	75	100	120	280	310
Radial spring stiffness (N/mm) C _r		85	220	330	400	600	450	1500	1000
Axial spring stiffness (N/mm) C _a		40	30	55	55	85	85	150	85
Moment of inertia (10 ⁻³ Kg m ²) J		0,08	0,1 / 0,16	0,3 / 0,5	1,4 / 2,3 / 2,8	1,4 / 2,3 / 2,8	2,6 / 4,2	4,6 / 6,2	9
Tightening torque of the retaining screws (Nm) M _A		6	15 / 12	40 / 30	60 / 55 / 50	80 / 70 / 50	100 / 80	110 / 90	145
Weight (approx. kg) m		0,2	0,2 / 0,3	0,5 / 0,6	1,7 / 2,1 / 2,3	1,7 / 2,1 / 2,3	2,5 / 3,3	3,4 / 4,1	4,9
Max. approved misalignment (mm) radial ΔK _r		0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2
(mm) axial ΔK _a		0,5	0,5	0,5	0,5	0,5	0,5	0,5	1
(degree) angular ΔK _w		1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
Max. rotating speed at V = 30 m/s (min ⁻¹) n _{max}		12700	10200	8600	6800	6800	6300	5900	4900

Dimensions series AKD

Type		18	30	60	80	150	200	300	500
L (mm) ±2		71	73	88	103	104	113	115	122
Ø A (mm) max.		46	56	66	83	83	90	110	122
Ø B (mm)		45	47 / 56	57 / 66	76 / 80 / 84	76 / 80 / 84	80 / 90	91 / 96	110
C (mm)		12	15	19,5	21,5	21,5	25,5	26	29,5
D ₁ ^{H7} / D ₂ ^{H7 2)} (mm) min.		10	10 / 20	14 / 23	20 / 28 / 35	20 / 28 / 35	25 / 32	32 / 40	40
(mm) max.		25	20 / 25	23 / 35	28 / 35 / 40	28 / 35 / 40	32 / 42	40 / 45	60
F (mm)		32	24	31	35	36	37	40	40
I (mm)		M5	M6	M8	M10	M10	M12	M12	M12
K (mm)		17,5	16 / 20	20 / 24	24 / 27 / 28	24 / 27 / 28	26 / 31	32 / 35	40
H (mm) Clearance diameter		48	56	70	84	84	93	102	115

Hubs 18 - 60 made of aluminium, hubs 80 - 500 made of steel; other materials available on request

1) Tolerance of keyway; standard JS9

2) Smaller diameters possible for lower torque of transmission

3) Stainless steel version also available


Ordering data

AKD 150	-	30 ^{H7}	-	35 ^{H7}	-	xxx
Type						
Bore diameter D ₁						
Bore diameter D ₂						
Further details e.g. material, keyway						

GERWAH®

Backlash-free Metal Bellow Coupling Series AK

with conical hub

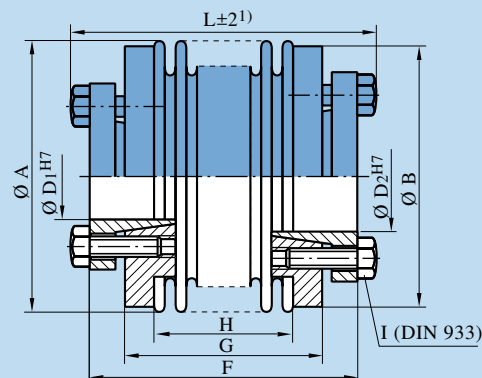

Technical data series AK

Type		30	60	80	150	200	300	500	800	1400	3000	5000
Nominal torque (Nm) T _{KN}		30	60	80	150	200	300	500	800	1400	3000	5000
Torsional stiffness (10 ³ Nm/rad) C _{Tdyn}		35/25	75/50	130/75	150/100	170/120	500/280	310	760	1300	2800	4800
Radial spring stiffness (N/mm) C _r		720/220	1100/330	1200/400	2000/600	2500/450	6300/1500	1000	510	710	2950	4920
Axial spring stiffness (N/mm) C _a		50/30	90/55	80/55	150/85	150/85	280/150	85	190	280	310	510
Moment of inertia (10 ⁻³ Kg·m ²) J		0,15	0,4	0,8	0,8	1,5	4	7,2	26,1	26,1	48	62
Tightening torque of the retaining screws (Nm) M _A		4,5	8,5	10	14	14	18	26	45	80	85	210
Weight (approx. kg) m		0,4	0,8	1,3	1,3	1,6	3,4	4,2	8,5	8,5	15	21
Max. approved misalignment (mm) radial ΔK _r		0,1/0,2	0,1/0,2	0,2/0,2	0,2/0,2	0,2/0,2	0,2/0,2	0,2	0,2	0,2	0,2	0,2
(mm) axial ΔK _a		0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	1,0	1,0	1,0	1,0	1,0
(degree) angular ΔK _w		1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,5	1,5	1,5	1,5	1,5
Max. rotating speed at V=30 m/s (min ⁻¹) n _{max}		11000	9100	7000	7000	6700	5200	4600	3700	3700	2800	2800

Dimensions series AK

Type		30	60	80	150	200	300	500	800	1400	3000	5000
L (mm) ±2		52/60	63/73	80/91	80/92	80/93	91/104	113	170	170	206	206
Ø A (mm) max.		56	66	82	82	90	110	122	157	157	157	208
Ø B (mm)		52	63	80	80	85	110	122	152	152	152	190
D ₁ ^{H7} /D ₂ ^{H7} (mm) min.		12	15	20	20	20	25	35	50	50	70	60
(mm) max.		20	25	35	35	40	50	55	70 ²⁾	70 ²⁾	80 ²⁾	85 ²⁾
F (mm)		45/53	55/65	72/83	72/84	72/85	80/93	102	150	150	190	186
G (mm)		29/37	37/47	50/61	50/62	50/63	54/67	72	110	110	150	146
H (mm)		16/24	21/31	24/36	24/36	25/37	29/40	40	84	84	84	94
I (DIN 933)		6 x M5	6 x M6	6 x M6	6 x M6	6 x M6	6 x M8	6 x M8	6 x M16	6 x M16	6 x M12	6 x M16

- 1) Keep space for the releasing screws
- 2) Larger bores on request
- 3) Stainless steel version also available


Ordering data

AK 150/80	30 ^{H7}	35 ^{H7}	xxx
Type length			
Bore diameter D ₁			
Bore diameter D ₂			
Further details e.g. material, keyway			

GERWAH®

Backlash-free Metal Bellow Coupling Series AK/SB

with outer conical hub

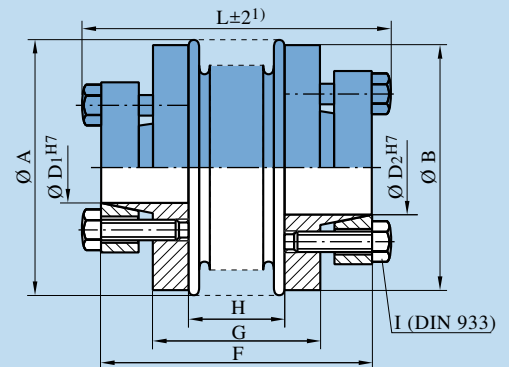

Technical data series AK/SB

Type			18	30	60	150	200	300	500	800	1400	3000	5000
Nominal torque (Nm) T _{KN}			18	30	60	150	200	300	500	800	1400	3000	5000
Torsional stiffness (10 ³ Nm/rad) C _{Tdyn}			8/6	35/25	75/50	150/100	170/120	500/280	310	760	1300	2800	4800
Radial spring stiffness (N/mm) C _r			200/85	720/220	1100/330	2000/600	2500/450	6300/1500	1000	510	710	2950	4920
Axial spring stiffness (N/mm) C _a			50/40	50/30	90/55	150/85	150/85	280/150	85	190	280	310	510
Moment of inertia (10 ⁻³ Kg·m ²) J			0,1	0,5	0,4	0,8	1,5	4	14	48	48	54	136
Tightening torque of the retaining screws (Nm) M _A			5,9	5,9	8,7	15	15	25	36	85	115	125	210
Weight (approx. kg) m			0,3	0,4	1,8	1,3	1,6	3,4	4	7,5	7,5	16	27
Max. approved misalignment	(mm)	radial ΔK _r	0,1/0,2	0,1/0,2	0,2/0,2	0,2/0,2	0,2/0,2	0,2/0,2	0,2	0,2	0,2	0,2	0,2
	(mm)	axial ΔK _a	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	1,0	1,0	1,0	1,0	1,0
	(degree)	angular ΔK _w	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,5	1,5	1,5	1,5	1,5
Max. rotating speed at V = 30 m/s (min ⁻¹) n _{max}			12700	11000	9100	7000	6700	5200	4600	3700	3700	2800	2800

Dimensions series AK/SB

Type			18	30	60	150	200	300	500	800	1400	3000	5000
L	(mm)	±2	65/73	60/68	80/90	98/110	98/110	111/122	135	180	180	220	245
Ø A	(mm)	max.	45	56	66	82	80	110	122	157	157	157	208
Ø B	(mm)		45	52	65	80	85	110	115	152	152	152	190
D ₁ ^{H7} /D ₂ ^{H7}	(mm)	min.	9	12	15	20	20	25	35	50	50	55	60
	(mm)	max.	15	20	32	35	42	50	55	70	70	75	85
F	(mm)		58/66	53/61	73/83	90/102	90/102	100/111	124	164	164	204	225
G	(mm)		38/46	31/39	37/47	50/62	51/63	56/67	72	110	110	146	146
H	(mm)		24/32	16/24	21/31	24/36	25/37	29/40	40	84	84	84	94
I		(DIN 933)	4 x M5	6 x M5	6 x M5	6 x M6	6 x M6	6 x M8	6 x M8	6 x M12	6 x M12	6 x M12	6 x M16

1) Keep space for the releasing screws

2) Stainless steel version also available


Ordering data

AK/SB 150/98	30 ^{H7}	35 ^{H7}	xxx
Type	length		
Bore diameter D ₁			
Bore diameter D ₂			
Further details e.g. material			

GERWAH®

Backlash-free Metal Bellow Coupling Series BK

Basic Line

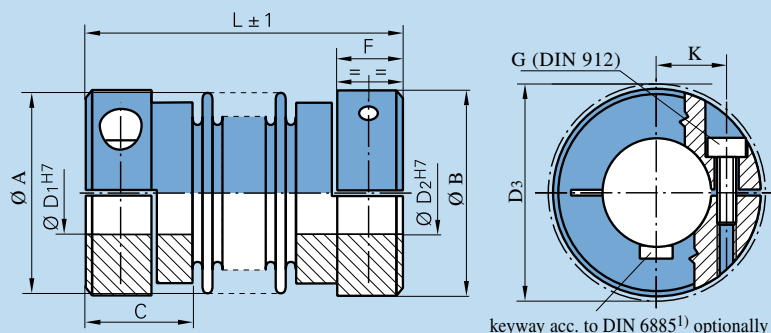

Technical data series BK

Type		2	4,5	10	18	30	60	80	150	300
Nominal torque (Nm)	T _{KN}	2	4,5	10	18	30	60	80	150	300
Misalignment (mm)	radial ΔK _r	0,1	0,1	0,15	0,15	0,1	0,1	0,2	0,2	0,2
	axial ΔK _a	0,3	0,3	0,4	0,4	0,4	0,4	0,4	0,4	0,4
	angular ΔK _w (degree)	2	2	2	1,5	1,0	1,0	1,0	1,0	1,0
Torsional stiffness (10 ³ Nm/rad)	C _{Tdyn}	1,5	6,5	8,1	8,1	35	75	130	150	500
Radial spring stiffness (N/mm)	C _r	-	-	-	200	720	1100	1200	2000	6300
Axial spring stiffness (N/mm)	C _a	-	-	-	50	50	90	80	150	290
Moment of inertia (10 ⁻³ Kg·m ²)	J	25	98	231	231	160	500	2800	2800	6200
Tightening torque of the retaining screws (Nm)	M _A	1	3	3	6	12	30	50	50	90
Weight (Kg)	m	0,03	0,074	0,12	0,2	0,3	0,6	2,3	2,3	4,0
Max. rotating speed at V= 30 m/s (min ⁻¹)	n _{max}	13.000	13.000	13.000	11.400	9.100	7.700	6.100	6.100	5.300

Dimensions series BK

Type		2	4,5	10	18	30	60	80	150	300
Ø A (mm)	max.	24	32	40	43,5	56	66	82	82	110
Ø B (mm)		25	32	40	45	56	66	84	84	96
C (mm)		13	15,5	17	19,5	24,5	29,5	33,5	33,5	37,5
L (mm)	±1	37	47	53	63	65	78	91	91	102
F (mm)		8	10	10	11	15	19,5	21,5	21,5	26
D1/D2 (mm)	H7 min. - max.	3-12	6-16	6-19	8-25	12-30	14-35	16-40	19-40	24-45
D3 (mm)	Clearance diameter	27	34	41,5	48	56	70	84	84	102
G (DIN 912)	8.8	M3	M4	M4	M5	M6	M8	M10	M10	M12
K (mm)		9	11,5	15,5	17,5	20	24	27	27	35

Hub design Up to size 10 single slitted, from size 18 double slitted

Hub bores Standard quality of fitting H7
Custom bores on request

Materials Hubs 2 - 60 made of aluminium
Hubs 80 - 300 made of steel
Metal bellow made of stainless steel

1) Tolerance of keyway; standard JS9

Ordering data


BK 18	-	15^{H7}	-	10^{H7}	-	xxx
Type						
Bore diameter D1						
Bore diameter D2						
Further details e.g. material, keyway						

Basic Line

GERWAH®

Backlash-free Metal Bellow Coupling Series CK

for flange mounting

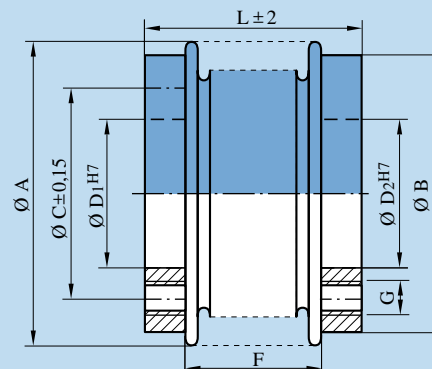

Technical data series CK

Type		18	30	60	80	150	200	300	500	800	1400	3000	5000
Nominal torque (Nm) T _{KN}		18	30	60	80	150	200	300	500	800	1400	3000	5000
Torsional stiffness (10 ³ Nm/rad) C _{Tdyn}		8/6	35/25	75/50	130/75	150/100	170/120	500/280	310	760	1300	2800	4800
radial spring stiffness (N/mm) C _r		200/85	720/220	1100/330	1200/400	2000/600	2500/450	6300/1500	1000	510	710	2950	4920
axial spring stiffness (N/mm) C _a		50/40	50/30	90/55	80/55	150/85	150/85	280/150	85	190	280	310	510
Moment of inertia (10 ⁻³ Kg·m ²) J		0,05	0,09	0,3	0,67	0,84	1,50	3,75	5	11	11	11	60
Weight (approx. kg) m		0,2/0,25	0,2/0,3	0,2/0,3	0,6/0,7	0,65/0,75	1,0/1,15	1,6/1,8	1,8	2,9	2,9	2,9	16
Max. approved misalignment (mm) radial ΔK _r		0,2	0,1/0,2	0,1/0,2	0,2/0,2	0,2/0,2	0,2/0,2	0,2/0,2	0,2	0,2	0,2	0,2	0,2
(mm) axial ΔK _a		0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	0,4/0,5	1	1	1	1	1
(degree) angular ΔK _w		1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,0/1,5	1,5	1,5	1,5	1,5	1,5
Max. rotating speed at V=30 m/s (min ⁻¹) n _{max}		13900	11000	9000	7100	7100	6600	5200	4600	3700	3700	3700	3000

Dimensions series CK

Type		18	30	60	80	150	200	300	500	800	1400	3000	5000
L	(mm) ±2	36/44	30/37	41/51	51/61	52/62	51/63	47/67	73	130	130	135	145
Ø A	(mm) max.	45	56	66	82	82	90	110	122	157	157	157	208
Ø B	(mm)	41	52	63	80	80	86	110	122	152	152	152	208
Ø C	(mm)	31	37	46	62	62	62	80	94	110	110	110	130
D ₁ ^{H7} /D ₂ ^{H7 1)}	(mm)	22	28	38	50	50	50	65	70	85	85	85	100
F	(mm)	24/32	16/24	21/31	24/35	24/36	24/37	28/41	41	87	87	84	94
G		6 x M5	6 x M5	6 x M6	6 x M6	6 x M6	6 x M6	6 x M8	6 x M8	6 x M16	6 x M16	6 x M16	6 x M16
Thread depth	(mm)	6	7	10	13	13	13	13	16	18	18	22	25

1) Other bore diameters available on request


2) Stainless steel version also available

Ordering data

CK	150/52	-	50 ^{H7}	-	50 ^{H7}	-	xxx
Type	length						
Bore diameter D ₁							
Bore diameter D ₂							
Further details e.g. material, keyway							

GERWAH®

Design Sample Calculation

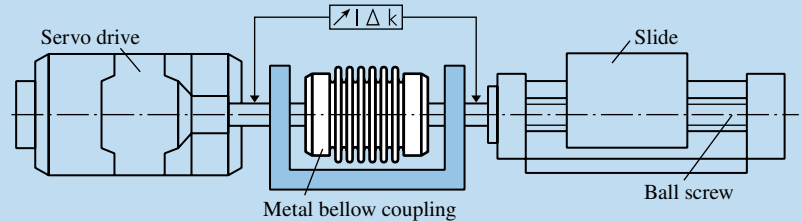

Design / Product information

Backlash-free, torsionally stiff metal bellow couplings are ready to install when delivered. The metal bellows are made of stainless steel, all other parts are made of aluminium or steel and partly have environmental friendly protective coating.

As a standard, the boreholes are equipped with a fitting in accordance with ISO-H7. For the shafts, we recommend a transition, e.g. H7/g6. When selecting other shaft fitting, the fitting should not exceed a maximum of 0,01 – 0,05 mm.

The power transmission between the coupling hub and the shaft occurs through compression and friction between the contact surfaces. Special attention must be paid to the tightening torque of the retaining screws as well as the perfect condition of the contact surfaces. The contact surfaces must be free of oil and grease when having a depth of roughness of R_{tmax} 16µ for the shaft. Versions with keyway are available.

The torques indicated can only be safely transferred if these points are complied with. Otherwise compromises must be accepted.

Dimensioning in accordance with the torque

Metal bellow couplings are generally designed according to the nominal torque stated in the list of technical data below as TKN.

The nominal torque must always be higher than the regular transferred torque. This generally applies to the use of servo motors, whose acceleration moment in positive and negative directions is much higher than the nominal moment.

For the use of metal bellow couplings which are put in controlled, high dynamic drives, the following dimensioning values have proven to be reliable in practice:

Calculation for the application of a metal bellow coupling in a machine tool drive

Drive related data for servo motor I FT 5104:

Maximum torque	TAS = 160 Nm
Moment of inertia	$J_{Mot} = 18,3 \times 10^{-3} \text{ kgm}^2$
Moment of inertia of ball screw and slide	$J_{Mach} = 17 \times 10^{-3} \text{ kgm}^2$

Output data for machine tool:

The low moment of inertia of the metal bellow coupling is disregarded. K = Load factor, impulse factor selected for this drive K = 2 ;

Design according to torque:

$$TKN \quad K \times TAS \times \frac{J_{Mach}}{J_{Mot} \times J_{Mach}} = 2 \times 160 \text{ Nm} \times \frac{17 \times 10^{-3} \text{ Kg} \cdot \text{m}^2}{(18,3 + 17) \times 10^{-3} \text{ Kg} \cdot \text{m}^2} = 154 \text{ Nm}$$

Coupling selection: AKD 200, TKN = 200 Nm, $C_{Tdyn} = 116 \times 10^3 \text{ Nm/rad}$

The metal bellow coupling is sufficient dimensioned, since 200 Nm > 154 Nm

Design according the resonance frequency:

$$f_{res} = \frac{1}{2} \sqrt{C_{Tdyn} \times \frac{J_{Mot} + J_{Mach}}{J_{Mot} \times J_{Mach}}} = \frac{1}{2} \sqrt{116000 \text{ Nm/rad} \times \frac{0,0183 + 0,017 \text{ Kg} \cdot \text{m}^2}{0,0183 \times 0,017 \text{ Kg} \cdot \text{m}^2}} = 116000 \text{ Hz}$$

The arithmetic calculation is clearly much higher than the expected resonance frequency.

K = 1,5 for evenly shaped movements

K = 2 for unevenly shaped movements

K = 2,5 for jerky movements

$$TKN \quad K \times TAS \times \frac{J_{Mach}}{J_{Mot} \times J_{Mach}} = [\text{Nm}]$$

For servo drives within tool making machines, the values for K = 1,5 – 2 should be used.

Design with consideration for dynamic torsional stiffness

Although metal bellow couplings are backlash-free and torsion-rigid, it should not be overlooked that they link two rotating masses. In disadvantageous cases the couplings can effect like torsion springs with high stiffness. The hunting of the drives and the harmonic oscillation in the

armature current of the motor must therefore never be within the range of the mechanical resonance frequency.

$$f_{res} = \frac{1}{2} \sqrt{C_{Tdyn} \times \frac{J_{Mot} + J_{Mach}}{J_{Mot} \times J_{Mach}}} = [\text{Hz}]$$

In practice the resonance frequency "fres" must be twice as large as the excitation frequency of the drive. The dynamic torsional stiffness C_{Tdyn} was selected so that it would not be within the range of clearance diameter from most applications. Various levels of torsional stiffness are available as standard versions.


We would be pleased to design your metal bellow couplings for you. Feel free to use our experience and know-how for your success.

Speak to us!


GERWAH

Type Series Versions Installation Examples


Variable series




Series AK/AKD
Model with clamping hub and inner conical hub

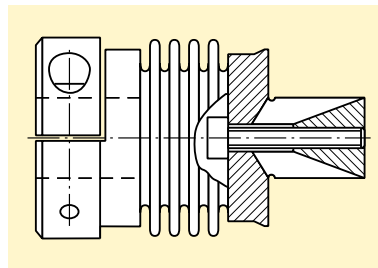


Series AKN/S
Model with clamping hub and expanding clamps




Series AKD/AK/SB
Model with clamping hub and outer conical hub





Series AKD/CK
Model with clamping hub and flange

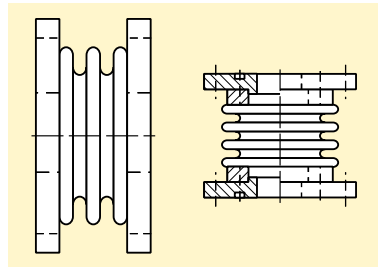

Series CK/XX
Model with special flange

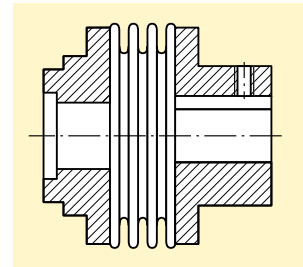

Series AKN/XX
Version with special hub on both sides

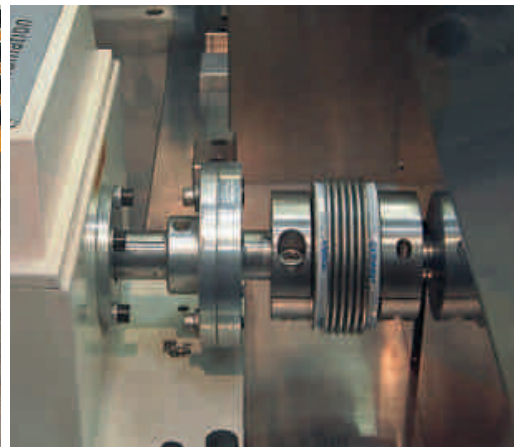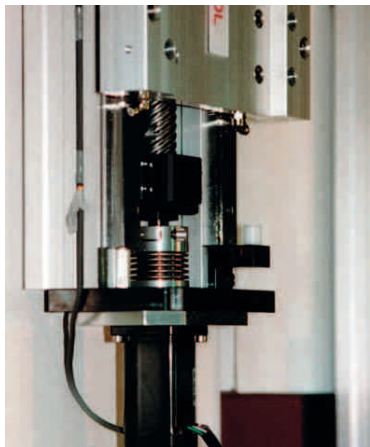


Sample applications

GERWAH®

Metal Bellow Couplings Mounting Instruction

Types of misalignment (figure 1)

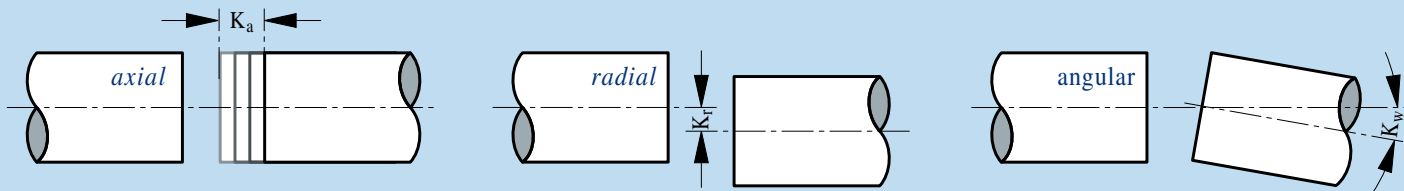

Assembly

Clean shaft ends and bores in hubs, degrease and check the tolerances.

Insert both shaft trunks into the hubs of the metal bellow coupling, and firmly tighten the screws, after examining the axial installation dimensions.

The tightening torque of the screws and the maximum approved misalignment should not be exceeded (refer to the list of technical data).

Removal

After loosening the backlash-free shaft hub connections, the drive can be pulled apart and the metal bellow coupling can be removed.

Conical bushings for series AK are forced off with a hexagonal socket screw.

Alignment

If several types of misalignment appear simultaneously, then each of the individual values should not exceed 100% Figure 2 shows how to regulate.

The more precise the alignment, the more reserves are available to handle additional misalignments for operation. This will have an advantageous effect on the service life, balance quality, and the accuracy of transmission.

If several types of misalignment occur at once, then the value must be lower than each of the maximum values.

Please ask for our detailed assembly instructions.

Design example

Application: A bellow coupling CK80/61 has to be installed. The following misalignment values result from the installation situation:

$$K_r = 0,1 \text{ mm}$$

$$K_a = 0,1 \text{ mm}$$

$$K_w = 0,2^\circ$$

Are the misalignment values for the CK80/61 acceptable?

Selection: (cp. details page 11): the tolerable misalignment values are:

$$K_{rn} = 0,2 \text{ mm}$$

$$K_{an} = 0,5 \text{ mm}$$

$$K_{wn} = 1,5^\circ$$


The reached radial misalignment $K_r = 0,1 \text{ mm}$ corresponds to 50% of the max. tolerable value. The value

$K_a = 0,1 \text{ mm}$ corresponds to 20% of the max. tolerable axial misalignment. The angular misalignment with $K_w = 0,2^\circ$ corresponds to 13% of the overall view.

Interpretation by means of the diagram: Enter the calculated values in the diagram on the right side (dashed line). The combination of the different misalignment values is in the tolerable area.

Interpretation by means of the empirical formula:

$50\% + 20\% + 13\% < 100\%$
The coupling can be installed.

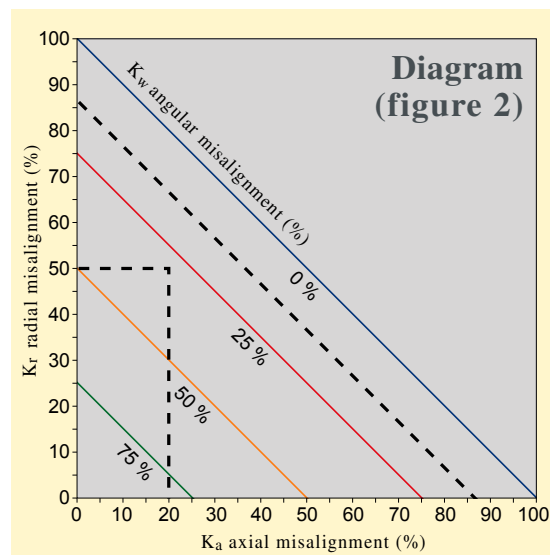

Empirical formula:

$$\frac{K_r}{K_{rn}} \times 100\% + \frac{K_a}{K_{an}} \times 100\% + \frac{K_w}{K_{wn}} \times 100\% < 100\%$$

Checklist for Your Couplings Inquiry

For your convenience just copy, fill out and fax back to us!

company	name
street	dpt.
ZIP/town	eMail
phone	fax

Please ask for personalized technical assistance!

1. Application: how is the coupling supposed to be used? (machine, machine group or system)

2. Type of connection

☐ clamp ring hub	☐ shrink disc hub	☐ locking assembly hub	☐ hub with set screw
☐ flange connection	☐ outer cone	☐ Fanuc	☐ spec. customer drawing

3. Dimensions

Length	mm	bore size D1	mm	keyway	yes	no	☐
Diameter	mm	bore size D2	mm	keyway	yes	no	☐

4. Misalignment of shafts

axial	mm	radial	mm	angular	°
-------	-------------------------	--------	-------------------------	---------	------------------------

5. Drive

5.1 Drive output	$P_{AN} =$	kW
5.2 Drive speed	$n =$	1/min
5.3 Nominal torque of drive	$M_{t_{nenn}} =$	Nm
5.4 Peak torque of drive	$M_{t_{max}} =$	Nm

6. Mass moment of inertia

6.1 Drive side	$J_A =$	Nm
6.2 Driven side	$J_L =$	Nm

7. Special influences

7.1 Ambient temperature surrounding the coupling?	$T =$	°C
7.2 Are there any shock loads?	☐ light	☐ medium ☐ heavy
7.3 Special materials (e.g. stainless steel)		
7.4 Special circumstances		

8. Planned quantities

☐ production	☐ prototype	☐ repair	☐ yearly	quantity
-------------------------------------	------------------------------------	---------------------------------	---------------------------------	-------------------------------

9. Target price

¤ /piece

Sales Representative

--

GERWAH®

Log on to
www.gerwah.com
for:

- Complete catalog info
- 3D-CAD product drawings
- Calculation software
- Product and corporate news
- And much more

GERWAH®



Your GERWAH® Partner

GERWAH GmbH

Phone (49)06022/2204-0

Fax (49)06022/2204-11

eMail info@gerwah.com

www.gerwah.com

Luetzeltaler Strasse 5a
D-63868 Grosswallstadt
Germany

DIN EN ISO 9001:2000

PETER® is a registered trade mark of GERWAH GmbH