


**MONET INTERIOR PENDANT**  
**AIP10487**

JOB NAME

TYPE

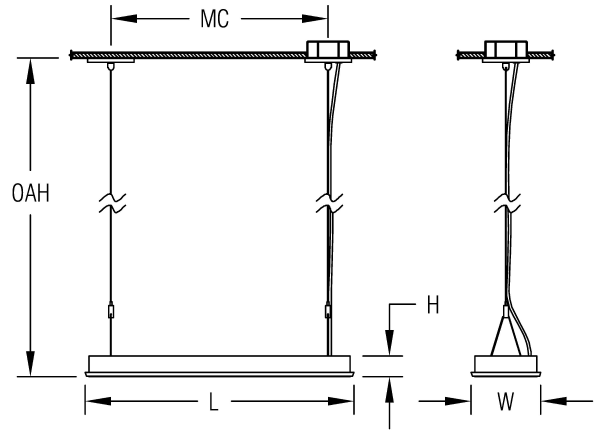

With a flash of style and a touch of class, Advent Monet makes a lasting impression. Distinctive motifs provide an artistic twist, while vivid color gels and luminous glowing edges complete an energetic design. The Monet family consists of interior sconces, pendants and ceiling mounts, as well as exterior wall mounts. Efficient linear fluorescent lamping and long-lasting LED options allow Monet to empower a space in a simple, elegant form. Unique low-profile luminaires, Monet pendants are a perfect fit in the Armstrong® TechZone™ Ceiling System and are UL listed for Damp Locations. With direct and indirect illumination, Monet pendants provide abundant functional illumination, finishing the space design. Interior Monet's white or optional colored face is balanced by a matching or white luminous edge.

**Dimensions**

W	L	H	OAH	MC
6.7 in	50.0 in	2.0 in	38.0 in	45.0 in
170 mm	1270 mm	51 mm	965 mm	1143 mm

**Weight**

Hanging weight: 25.0 lb (11.4 kg).

**Features**

- Integral Class II power supply included, eliminating the need for remote mounting, simplifying installation.
- Formed metal construction provides durable protection for internal components and is recyclable.
- External fasteners are not visible, providing a clean fixture design.
- Frosted acrylic lens gives the fixture a unique identity with light reflected through the polished edge.
- Durable wood laminate faceplate option adds a warm, natural texture to a space.
- Fixture adds a splash of color to a space with theatrical color gels. Standard colors are available with other colors available upon request. Contact factory to customize a color gel that coordinates with your application.
- Embossed stainless steel-linear and crosshatch face plate option adds a unique, metal accent and texture to a space.
- Standard thermoset polyester powder coat paint provides durable protection in a palette of color options. Custom colors available upon request.

**Technical Notes**

**Construction**

- Stainless steel support cables.
- Overall height is 36" unless otherwise specified.
- Optional motif is black, unless specified.

**Electrical**

- Advent uses strict quality guidelines in LED selection to ensure the white LED's we use meet or exceed ANSI Binning Standards (ANSI C78.733).
- Integral electronic fluorescent ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while eliminating the need for remote mounting and simplifying installation.
- Meets NEC 410.73 double-ended, fluorescent lamp ballast disconnect requirements.
- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.

**Lamping/lamp**

- L70 life= 50,000+ hours.
- Fluorescent lamps are 3500K unless specified.
- Any upward facing LEDs will be covered with a protective lens.
- Lamps included, with the exception of T8, T5 and incandescent.

**Mounting**

- Mounts to a standard 2" x 4" switch junction box.

**Additional Documents**

[Color Chart \(http://www.specAdvent.com/pdfs/advent\\_color\\_chart.pdf\)](http://www.specAdvent.com/pdfs/advent_color_chart.pdf)

MODEL NUMBER	LIGHT SOURCE	FINISH	VOLTAGE	LAMP OPTIONS	OPTIONS	COLOR ACCENTS

Not all options are available in all configurations, consult factory for details.

**Light Source**

		Photometry
<b>L57.3W</b>	White 57.3W 3.2W/6" LED Light Engine <b>Delivered Lumens: 2,346</b>	50IN REC PENDANT LED LOW
<b>L114.7W</b>	White 114.7W 6.4W/6" LED Light Engine <b>Delivered Lumens: 4,693</b>	50IN REC PENDANT LED HIGH
<b>1F28</b>	<del>1</del> 1F28WT5/Mini Bipin	ITL60718
<b>1F28DM</b>	<del>1</del> 1F28WT5/Mini Bipin Dimming	ITL60718
<b>1F32</b>	<del>1</del> 1F32WT8/Med Bipin	ITL60718
<b>1F54</b>	<del>1</del> 1F54WT5HO/Mini Bipin	ITL60718
<b>1F54DM</b>	<del>1</del> 1F54WT5HO/Mini Bipin Dimming	ITL60718
<b>2F28</b>	<del>1</del> 2F28WT5/Mini Bipin	ITL60718

<sup>1</sup> T5 & T8 Fluorescent Linear Lamp(s) Not Included  
<sup>2</sup> DML with LED light engine only.

**Voltage**

<b>120-277V</b>	Universal Voltage
<b>120V</b>	120 Volt
<b>277V</b>	277 Volt

**Lamp Options**

<b>3000K</b>	3000K Cct
<b>DML<sup>2</sup></b>	0-10V Dimming
<b>3500K</b>	3500K Cct
<b>4000K</b>	4000K Cct
<b>EMI</b>	Emergency Ballast Integral
<b>EMR</b>	Emergency Ballast Remote

**Options**

<b>ES1</b>	Embossed Stainless Steel-linear Pattern
<b>ES2</b>	Embossed Stainless Steel-cross Hatch Pattern
<b>FP01</b>	Open
<b>FP02</b>	Boxes
<b>FP03</b>	Cross Ends
<b>FP04</b>	Split
<b>FP05</b>	Split 2
<b>FP06</b>	Prairie
<b>FP07</b>	Thatch
<b>FP08</b>	Squares
<b>FP09</b>	Perforated
<b>FP10</b>	Parquet
<b>JBC</b>	Junction Box Cover
<b>NPC</b>	No Perimeter Color
<b>WF1</b>	Cherry Laminate
<b>WF2</b>	Maple Laminate

**Color Accents**

<b>CG01</b>	Red Color Gel
<b>CG02</b>	Orange Color Gel
<b>CG03</b>	Green Color Gel
<b>CG04</b>	Blue Color Gel

**Painted Finishes**

PT01 SuperWhite	PT07 Light Taupe	PT13 Warm Gray	PT19 Blue	PT29 Red Brass	PT42 Sky Blue	PT48 Brass
PT02 White	PT08 Medium Taupe	PT14 Light Gray	PT20 Dark Green	PT31 Medium Bronze	PT43 Teal	PT49 Bronze
PT03 Morning Light	PT09 Medium Gray	PT15 Sage	PT21 Pearl White	PT32 Dark Bronze	PT44 Green	
PT04 Warm White	PT10 Dark Gray	PT16 Spruce	PT22 Platinum	PT33 Dark Blue	PT45 Purple	
PT05 Putty	PT11 Black	PT17 Red	PT27 Deep Copper	PT40 Yellow	PT46 Aluminum	
PT06 Warm Beige	PT12 Dark Chocolate	PT18 Deep Red	PT28 Dark Stainless	PT41 Orange	PT47 Deep Red Brass	

**Metal and Plated Finishes**

BAL	Brushed Aluminum
-----	------------------

**Kit Details**

