

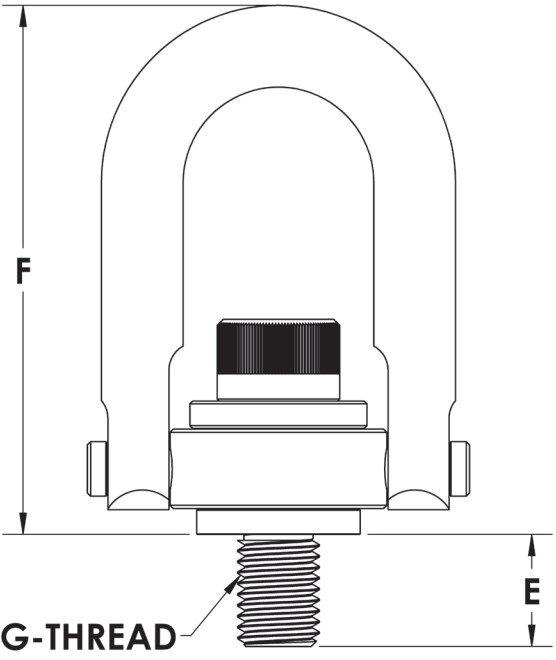
ADB® CUSTOM ORDERSHEET

Return via email: sales@adbhoiststrings.com

Return via fax: 229-253-8929

Contact via phone: 1-800-423-4425

Customer Name:	Customer Contact:	Date:
Customer Phone:	Customer Fax:	Customer Email:
Preferred Distributor Name:	Distributor Phone Number:	Distributor Fax:
ADB® Standard Part Number:	Quantity Requested:	
Additional information, dimensional request, and required certifications:		

<p>Working Load Limit:</p> <div style="border: 1px solid black; height: 80px; width: 100%;"></div>	 <p>The diagram shows a cross-section of a hoist ring. Dimension 'F' is the total height from the top of the ring to the top of the threaded section. Dimension 'E' is the height of the threaded section. The label 'G-THREAD' points to the threads.</p>	<p>Special Plating: (Black Oxide is Standard)</p> <div style="border: 1px solid black; height: 80px; width: 100%;"></div>
<p>Proof Load Test Requirement:</p> <div style="border: 1px solid black; height: 80px; width: 100%;"></div>		<p>Extra Nut and Washer for through hole applications:</p> <div style="border: 1px solid black; height: 80px; width: 100%;"></div>
<p>Thread Diameter and TPI or Pitch:</p> <div style="border: 1px solid black; height: 80px; width: 100%;"></div>		<p>Thread Projection:</p> <div style="border: 1px solid black; height: 80px; width: 100%;"></div>

CONVERSION CHART

useful conversion data (approximation)

To Convert	From	To	Multiply By
Length	Millimeter (mm)	Inch (in)	0.03937
Torque	Newton-Meter (Nm)	Foot-Pound (ft-lbs)	0.7376
Weight	Kilogram (kg)	Pound (lb)	2.204

Photocopies of this page are permitted only for the sole purpose of submissions of quote request to ADB® (www.adbhoiststrings.com)

