


LSLDR73 - ROUND GLARE-FREE LOUVER LED PATHWAY/STEP LIGHTING

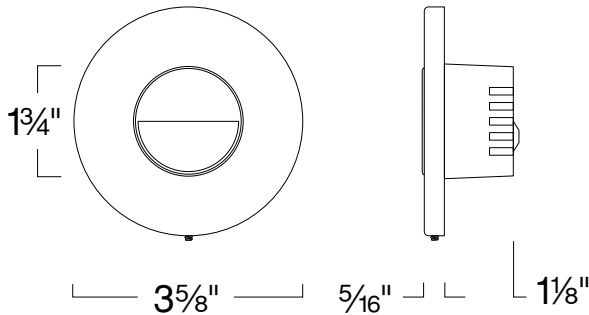

SPECIFICATION

120V 3.5W LED

Application: Low level illumination of pathways, aisles and lower egress in residential and commercial applications. Louver design shields the lamp source to eliminate glare.

Mounting: Optional mounting bracket for cement pour, retrofit and joist mount (LSLDR-BRKT).

Dimming: Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 2,700K, 3,500K & 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

Warranty: Covered by a 3-year warranty to be free of defects in materials or craftsmanship.

Finish: Seamless and screw-less die-cast aluminum faceplate. Available in All Black and All White.

Accessory: Available in and Universal Bracket.

Label: cETL Listed

LED Details:

3.5W 240 + Lumens Delivered
Color Rendering Index (CRI): 80
Color Temperature: 3,000K
Lamp Equivalents: 10W Incandescent

Benefit:

- Die Cast Construction
- Sleek screw-less face plate
- Direct wiring, long leads.
- No remote driver required
- Dimmable with ELV Dimmers

2016.2.1

FEATURE:



ORDERING EXAMPLE : LSLDR73WW/LSLDR-BRKT

LSLDR73	FINISH	OPTION	ACCESSORY
LSLDR73	BB :All Black WW :All White	Blank :3000K	Blank :None /LSLDR-BRKT :Universal Bracket

ID#: 2835

