P	
_	
1	
Š	
Ī	
3	
7	
Ā	

FIGURE NUMBER

SMITH ®						
	959 Alnes	ss Street,	North	York, O	ntario	M
CUSTOMER DRIVEN	TEL: (416	3) 736-96	10	FAX: (416) 7	736

LOCATION


3J 2J1 TEL: (416) 736-9610 FAX: (416) 736-3789

FLOOR DRAINS

BLOOD AND WATER DRAINS

FUNCTION: Used in packing house slaughtering areas. Consists of two individual drains. Slotted grate drain permits drainage of animal blood to separate storage tank while adjacent drain connected to sewer is covered by solid ground joint plug. When area is to be washed down, the solid plug is put on the blood drain and the slotted grate on the sewer water drain, thus water used in the cleaning operation will be directed to sewer and will not enter the blood storage tank.

Free Area

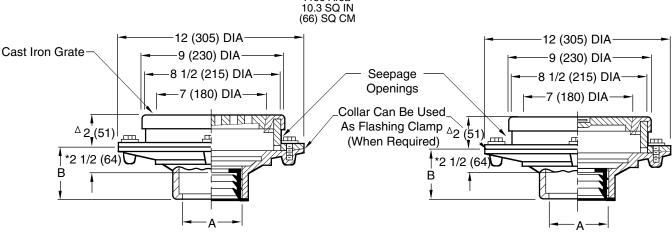

A SIZE	02(50)	03(80)	04(100)
В	3 3/4 (95 NO-HUE and Spe 2 (51) fo	5) for Ca 3 eedi-Set	ıulk,

*This dimension to Internal Stop of Speedi-Set Gasket.

NOTE: Dimensions shown in parentheses are in millimeters. Fig. 2640C . . . CAULK OUTLET Fig. 2640Y ... NO-HUB OUTLET




Fig. 2640

TYPICAL INSTALLATION

Drains are located close to each other for ease of switching grate and plug.

REGULARLY FURNISHED:

Two (2) Duco Cast Iron Bodies with Flashing Collar and Bronze Rim, Cast Iron Grate and Ground Joint Plug.

VARIATIONS:

L Speedi-Set Service Weight LXH Speedi-Set Extra Heavy T Threaded Outlet

OPTIONAL MATERIALS:

Bronze Grate and Plug -RB Galvanized Cast Iron -G

E D C B	9-16-96 6-16-95 7-4-94 12-2-93	Remove Heavy Duty Tractor Added Millimeters Revised Chg'd Table, Var.	EMB EMB CMB TWK	BS BS BS BS	_	VOLUME CUBIC FEET	FIGURE NUMBER 2640-CAN
REV.	DATE	DESCRIPTION	BY	CKD. BY			2010 07111