

Dock Seal & Shelter Survey

Application and Site Criteria Information

BLUE GIANT®

A - Dock Seal & Shelter Site Conditions: *Please provide project photo.*


Seal / Shelter	Overall Height:
<input type="checkbox"/> Installed <input type="checkbox"/> Not Installed	Overall Width:
Manufacturer:	Top Projection:
Model:	Bottom Projection:
Seal / Shelter Type	Side Member Height:
<input type="checkbox"/> Shelter <input type="checkbox"/> Foam Sided Shelter <input type="checkbox"/> L-Pad	Head Member Width:
<input type="checkbox"/> Standard Foam Dock Seal <input type="checkbox"/> Standard Foam Curtain Seal	Side Face Width:
Building Wall Type	Side Face Back:
<input type="checkbox"/> Masonry <input type="checkbox"/> Metal <input type="checkbox"/> Concrete <input type="checkbox"/> Other	Top Face Height:
Door Jamb Type	Distance Between Doors:
<input type="checkbox"/> Masonry <input type="checkbox"/> Metal <input type="checkbox"/> Concrete <input type="checkbox"/> Other	Distance Above Doors:
Building Wall and Foundation	Bumper Projection:
<input type="checkbox"/> Flush <input type="checkbox"/> Offset	Door Size: W x H
Describe:	Dock Approach Slope: %
Mounting Surface Condition	<input type="checkbox"/> Decline <input type="checkbox"/> Incline <input type="checkbox"/> Level
<input type="checkbox"/> Even <input type="checkbox"/> Uneven	
Describe:	

B - Truck and Application Details

<input type="checkbox"/> Straight Semi's Bed Height: 48 - 52" Total Height: 12 - 13' 6"	<input type="checkbox"/> Low Boys Bed Height: 19 - 25" Total Height: 12 - 13' 6"	<input type="checkbox"/> Overseas Containers Bed Height: 55-62" Total Height: 12' 2" - 13' 6"	<input type="checkbox"/> City Delivery Trucks Bed Height: 45 - 48" Total Height: 11 - 12' 6"	<input type="checkbox"/> Refrigerated Trucks Bed Height: 50 - 60" Total Height: 12' 6" - 13' 6"
<input type="checkbox"/> High Cube Bed Height: 36 - 42" Total Height: 13 - 13' 6"	<input type="checkbox"/> Flatbeds Bed Height: 48 - 60" Total Height: N/A	<input type="checkbox"/> Step Vans Bed Height: 20 - 30" Total Height: 8'6" - 10'	<input type="checkbox"/> Straight Trucks Bed Height: 36 - 48" Total Height: 10' 6" - 12'	<input type="checkbox"/> Panel Trucks Bed Height: 20 - 24" Total Height: 8 - 9'
Yard Jockeys Used	<input type="checkbox"/> Yes <input type="checkbox"/> No	Traffic Volume (trucks per shift):		
Trucks with Lift Gate Used	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Light (1 - 3) <input type="checkbox"/> Moderate (4 - 6) <input type="checkbox"/> Heavy (6+)		
Full Height Access Required	<input type="checkbox"/> Yes <input type="checkbox"/> No	Number of Shifts Per Day:		
Full Width Access Required	<input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> One Shift <input type="checkbox"/> Two Shifts <input type="checkbox"/> Three Shifts		
Sealing Requirements:				
<input type="checkbox"/> Good <input type="checkbox"/> Better <input type="checkbox"/> Best				

Notes:

C - Building Wall Conditions: Please provide project photo

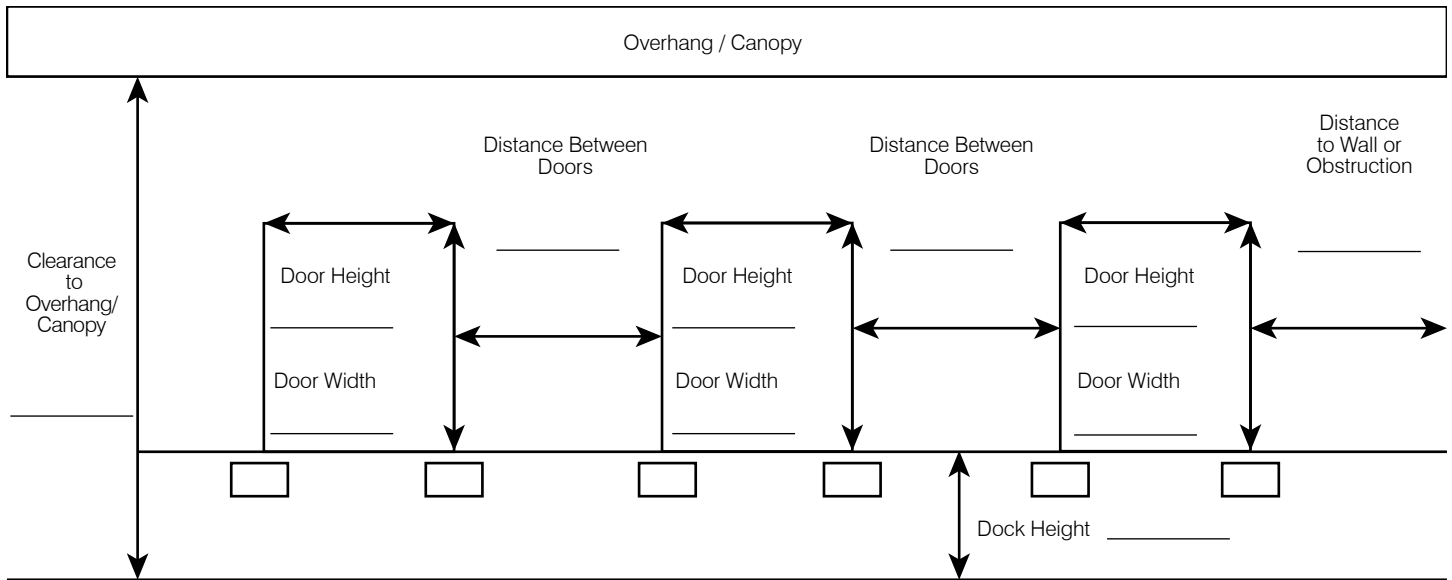


D - Dock Approach Conditions:

Please state the following in whole inches:

- ☐ Dock height (R1) = _____ inches ☐ R2 = _____ inches ☐ Run (R3) = _____ inches

Dock approach:

- ☐ Level drive _____ length
☐ Decline drive _____ % grade
☐ Incline drive _____ % grade

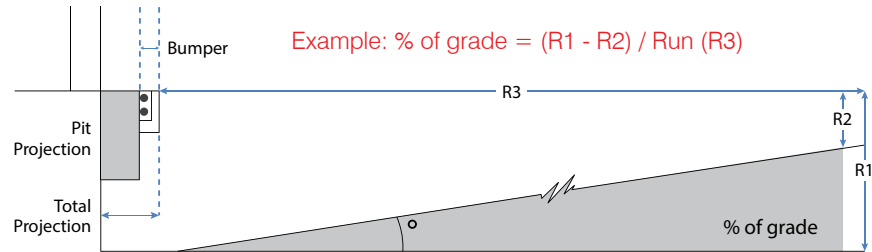

NOTE: If the seal is incorrectly specified and/or misplaced for the application, not only will the seal be ineffective, but it may result in to the building and the dock seal. Apply taper to dock seal according to the slope of approach to the dock, i.e., dock seal taper should be considered to each 1% angle of decline/incline, over 2%

E - Truck / Trailer Conditions:

Truck / Trailer Door Type

- ☐ Roll-up
☐ Hinged
☐ Other _____

Truck / Trailer Door Type

- ☐ Load singled stacked
☐ Load double stacked
☐ Load width _____
☐ Load height _____

