




# PINE

## WINSCAPE® LED Landscape Light

CATALOG NUMBER	
NOTES	
TYPE	

### Specifications

D:	Ø5-3/8" (137mm) + Mounting
H:	9" (229mm) w/C1 11" (279mm) w/C2 14-7/8" (378mm) w/C3

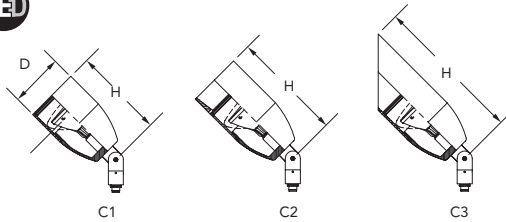

### DESCRIPTION

The Pine Series accent light is suitable for a variety of mounting applications including ground, wall, tree, sign and architectural accents. Suitable for wet locations. Dimmable using a standard low voltage magnetic dimmer.

### ORDERING INFORMATION

EXAMPLE: PINE 9LED38 120 NSP WSL KM JBA IHL C2 BL

PINE											
Series*	Source*	LED Color	Voltage*	Distribution		Lens		Mounting		Mounting Accessories*	
PINE	9LED38	30K 40K 50K	120 277	NSP Spot NFL Narrow Flood FL Flood		FLC Flat Clear WSL Watershed		KM Knuckle Mount		<b>Independent Mounting</b> <b>JBA</b> Aluminum J-Box <b>JBB</b> Bronze J-Box Architectural <b>ARJB</b> J-Box, Aluminum 12"-48" <b>CN4</b> Rectangular Canopy <b>CN5</b> 5" Round Canopy <b>WMC</b> Wall Mount Cover <b>WMSA</b> Wall Mount with Splice Access <b>STK</b> Mounting Stake <b>TRA</b> Tree Mounted J-Box, Aluminum <b>TRB</b> Tree Mounted J-Box, Bronze	<b>Independent Mounting</b> <b>_TRAS</b> Tree Mounted J-Box with Aluminum mounting strap, available with 1-4 JBoxes per strap <b>_TRBS</b> Tree Mounted J-Box with Bronze mounting strap, available with 1-4 JBoxes per strap <b>PM60A</b> Adjustable Post Mount <b>PM60C</b> Post Mount with Conduit <b>PM60D</b> Post Mount with Open Bottom <b>Stems<sup>1</sup></b> <b>S3</b> 3" Stem <b>S6</b> 6" Stem <b>S_</b> 12" - 24" stems, available in 6" increments

Options <sup>2</sup>		External Caps*		Finish*	
<b>Internal Louver</b> <b>IHL</b> Honeycomb Louver <b>Internal Accessory</b> <b>L1</b> Prismatic Lens <b>L2</b> Linear Spread Lens <b>L3</b> Softening Lens	<b>Internal Filters</b> <b>FA</b> Amber <b>FG</b> Green <b>FGD</b> Green Dichroic <b>FLB</b> Light Blue <b>FM</b> Mercury Vapor <b>FMB</b> Medium Blue <b>FMBD</b> Medium Blue Dichroic <b>FR</b> Red <b>FRD</b> Red Dichroic	<b>C1</b> Short Flush <b>C2</b> Recessed Lens <b>C3</b> 45° Angle Cut	<b>All Material</b> <b>BL</b> Black Textured <b>BRS</b> Bronze Smooth <b>BRT</b> Bronze Textured <b>CHS</b> Chrome Smooth <b>DBL</b> Black Smooth <b>DDB</b> Designer Bronze	<b>All Material</b> <b>DNA</b> Natural Aluminum <b>NBS<sup>3</sup></b> Natural Bronze Smooth <b>VET</b> Verde Textured <b>WH</b> White Textured <b>WHS</b> White Smooth <b>CF</b> Custom Finish	

### FEATURES & SPECIFICATIONS

**MATERIAL:** Body and cap cast from 356-T6 Aluminum, knuckle machined from 6061-T6 Aluminum.

**LIGHT SOURCE:** LED, 12 watts

**VOLTAGE:** 120 or 277

**DISTRIBUTION:** See ordering guide.

**LENS:** Cut from heat strengthened borosilicate glass for superior clarity and strength.

**MOUNTING:** Adjustable knuckle is 1/2" NPT.

**ELECTRICAL:** Integral low voltage AC LED driver. Dimmable with a standard low voltage magnetic dimmer.

**FINISH:** Super durable polyester TGIC powder coat finish (standard). Optional Zinc undercoat for harsh environments.

**FEATURES:** Field replaceable lens. Any combination of up to 3 lens accessories/color filter/shielding can be specified in any cap style and are held securely by a removable stainless steel clip ring. Fixture comes standard with the Watershed™ Lens.

**LISTING:** UL, cUL: Wet Location.

**WARRANTY:** 5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx)

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

#### \*Required Fields

#### Notes:

- S3, S6, S12, S18 and S24 available on the PM60A, PM60C or P60D only.
- Up to 3 Optional items can be specified.
- NBS paint uses specialty pigments to give a natural appearance that may vary by fixture.




9144 Deering Avenue, Second Floor • Chatsworth, CA 91311 • [www.hydel.com](http://www.hydel.com)  
 Phone: 866.533.9901 • Fax: 866.533.5291

©2014-2015 Acuity Brands Lighting, Inc.  
 Rev. 12/14/15  
 PINE\_LED


**PHOTOMETRIC DIAGRAMS**

To see complete photometric reports or download .ies files for this product, visit [www.hydre.com](http://www.hydre.com)


**3000K**



#9002  
12W  
10° Narrow Spot




#9003  
12W  
25° Narrow Flood




#9004  
12W  
40° Flood


**5000K**



#9005  
12W  
10° Narrow Spot



#9006  
12W  
25° Narrow Flood

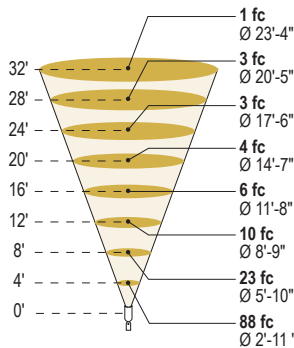

#9007  
12W  
40° Flood

9002, 9003, 9004 & 9005 LED-32 unit independently tested at BAL LABS inside of a fixture to LM-79-08 standard

9006 & 9007 multiplier used based on 9003 & 9004 results.

\*All information is subject to change without prior notice. All diameter dimensions are nominal.

Winscape

# lighting facts<sup>CM</sup>

A Program of the U.S. DOE

Light Output (Lumens)	390
Watts	11.5
Lumens per Watt (Efficacy)	33

---

Color Accuracy	82
Color Rendering Index (CRI)	

---

Light Color  
Correlated Color Temperature (CCT)

**3032 (Bright White)**

2700K 3000K 4500K 6500K

Warm White | Bright White | Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: 84Q4-64K0BG  
Model Number: 9002\_LED-32\_WW\_10DEG  
Type: Other

Winscape

# lighting facts<sup>CM</sup>

A Program of the U.S. DOE

Light Output (Lumens)	488
Watts	11.7
Lumens per Watt (Efficacy)	41

---

Color Accuracy	81
Color Rendering Index (CRI)	

---

Light Color  
Correlated Color Temperature (CCT)

**4705 (Daylight)**

2700K 3000K 4500K 6500K

Warm White | Bright White | Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the Label Reference Guide.

Registration Number: 84Q4-HB2N5B  
Model Number: 9005\_LED-32\_CW\_10DEG  
Type: Other