


SPECIFICATIONS

Interior Indirect

CANOE

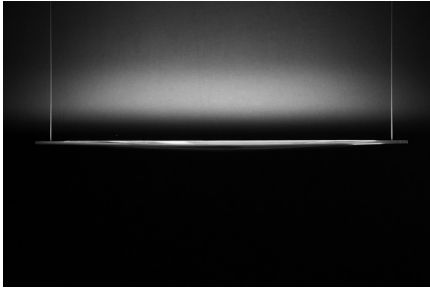

6800 LED

Canoe Pendant Mount

Type:

Project:

Qty:

Construction

Solid Aluminum Housing

Source

Pendant LED lumen package includes (4) 12 inch field replaceable LED boards. Three available color temperature options (3000K, 3500K & 4000K). Components are designed to be serviceable and replaceable. CRI > 81.

Optics

Optical system consists of injection-molded primary optic and metal reflector.

Finish

Polished aluminum finish, polished plated copper finish, gloss red paint, gloss black paint, or pearl white housing. Canopies are painted matte white unless noted as a modification. Consult factory for other custom finishes.

Mounting

Conductive cable suspended pendant with remote power supply. Cable length is field adjustable up to a maximum of 60". Three mounting options are available for grid, sloped, or hard ceiling mounts. Hard ceiling mount is provided with 2 canopy styles to match installation conditions. Power supply with enclosure is provided for remote mounting up to 15' from luminaire.

Electrical

LED light engine consists of modular LED boards and remote 0-10V dimming driver rated for 50,000 hours (L80) at 25°C ambient temperature. Driver input wattage is 66W. 120-277V.

Environment

Ambient operating temperature between 0°C and 35°C Luminaire Length 54" nominal length

Validation

ETL dry location, cETL dry location. Lighting Facts partner.

Warranty


5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Source	Wattage	Nominal Lumens (delivered)
LLP1A	66	6040

Note: Representative family (6800) luminaire tested at 40K specific finishes, diffuser materials, and color temperatures will affect actual results.

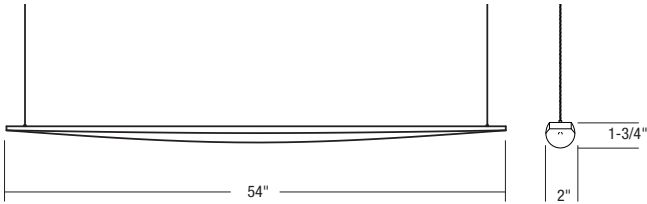

CATALOG NUMBER

Example: WFP6800 54LONG CCGRID LLP1A 30K MVOLT N80 PA

Series	Length	Stem Option	Source	Color Temperature	Voltage	Electrical Option	Finish	Special
WFP6800 LED Canoe Series	54LONG 54 inch nominal length	CCGRID	LLP1A LED Linear 1	30K 3000K CCT	MVOLT 120-277 Volt Input	N100 nLight enabled module (100% constant lumen manager N80 nLight enabled module (80% constant lumen manager	BGP Blank gloss paint	MOD* Modification / Consult Factory
		CCHDCL5		35K 3500K CCT			CPF* Custom paint finish	
		CCSLOPE		40K 4000K CCT			PA Polished Aluminum	
		CCHDCL2					PCOP Polished Copper Plated	
							PWGP Pearl White Gloss Paint	
							RGP Red Gloss Paint	

Describe Modification:



Notes

- Winona Lighting products are union made.
- * Available by modification only. Consult factory.

Weight

54LONG - 9 lbs.

6800 LED
CANOE PENDANT MOUNT

Type:


Project:

Qty:

PHOTOMETRICS

Actual performance may differ as a result of end-user environment and application.


Test Report: LTL25039
IES LM 79-08
WDP6800-54LONG-4000K
Lumens: 5951
Wattage: 66W
Efficacy: 90.6
Max. Candela: 2,346




IES data is available at www.winonalighting.com. Always refer to our website for the latest IES files updates.

DIMENSIONS & MOUNTING


Grid Ceiling (CCGRID)

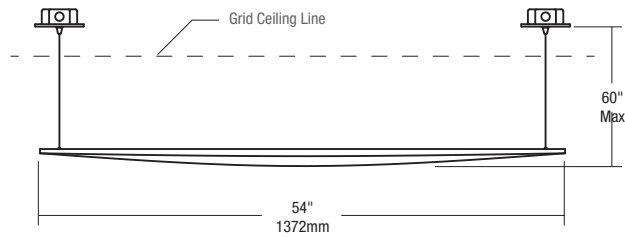


Remote Power Supply

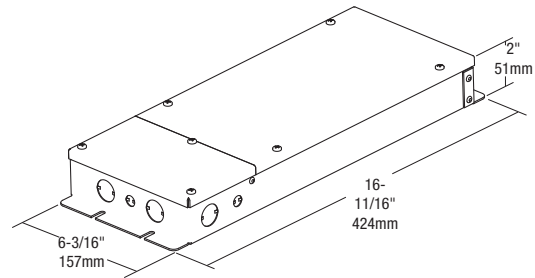

Sloped Ceiling (CCSLOPE)
(up to 45°)

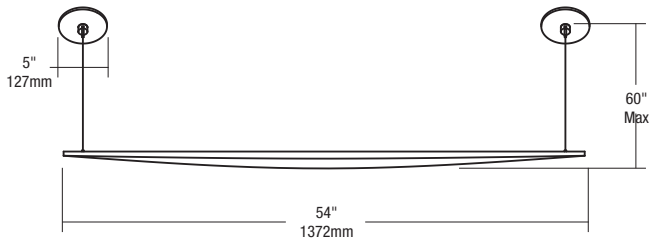

Hard Ceiling (CCHDCL5)
5" Canopy

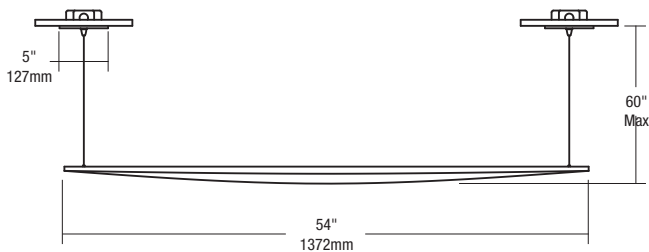

Hard Ceiling (CCHDCL2)
2" Canopy (with mud ring)

