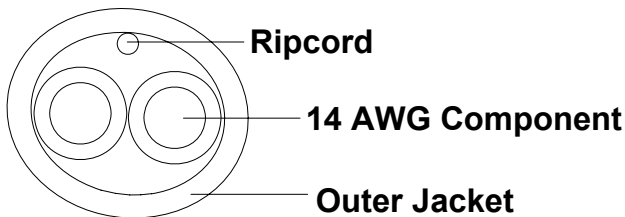



Product Specification Sheet

Catalog Number: 14-2C

Construction Detail	Product Illustration
 <p>Ripcord</p> <p>14 AWG Component</p> <p>Outer Jacket</p>	
Physical Construction	Description
Component 1: 14 AWG 19/27 bare copper conductor PVC Insulation: .010-inch nominal thickness	Power Limited Circuit Cable Riser rated wire for audio, instrumentation and control applications in accordance with NEC articles 725, 800
	Color Code
	Black, Red
	Electrical Specifications
	14 AWG: DCR: 2.70 Ω per 1000 feet Voltage: 300 Volts RMS Temperature: -20°C to 60°C
Final assembly: 2 of component 1 twisted in a 4-inch lay. Nylon ripcord under the jacket. PVC jacket: .025-inch nominal thickness Final construction: .230-inch nominal OD Product Print Legend: LWC 14-2C E190607 14 AWG (UL) CL3R FT-4 Sequential footmarks are applied in conjunction with the print legend.	Regulatory Specifications
	(UL) rated CL3R CSA rated FT4 EU RoHS 2002/95/EC Compliant since 06/15/2005
Specification Control	Product Information
Revision Date: 08/05/2005 Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.	Jacket Colors: Black, Gray Packaging: 1000 foot reels

Form Revision Date: 04/15/2004