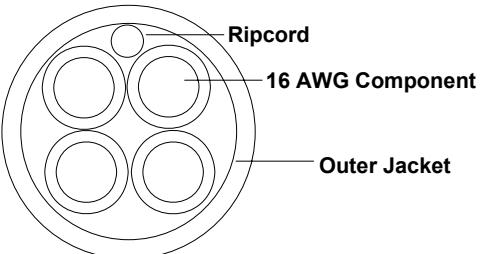



Product Specification Sheet

Catalog Number: 16-4C-KO

Construction Detail	Product Illustration
 <p style="text-align: center;">Ripcord 16 AWG Component Outer Jacket</p>	
Physical Construction	Description
<p>Component 1: 16 AWG 65/34 bare copper conductor PVC Insulation: .010-inch nominal thickness</p>	<p>Communications rated wire for control, instrumentation and distributed audio applications in accordance with NEC article 800.</p>
	Color Code
	<p>Black, Red, White, Green</p>
	Electrical Specifications
	<p>16 AWG: DCR: 4.02 Ω per 1000 feet Voltage: 300 Volts RMS Temperature: -20°C to 75°C</p>
	Regulatory Specifications
<p>Final assembly: 4 of component 1 twisted in a 4-inch lay Nylon ripcord under the jacket. PVC jacket: .025-inch nominal thickness Final construction: .242-inch nominal OD Product Print Legend: LWC 16-4C-KO E190606 (UL) 16 AWG TYPE CMR 75C --- C(UL) CMG Sequential footmarks are applied in conjunction with the print legend.</p>	<p>(UL) rated CMR C(UL) rated CMG EU RoHS 2002/95/EC Compliant since 06/15/2005</p>
Specification Control	Product Information
<p>Revision Date: 02/14/2003</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Light Green, White, Yellow</p> <p>Packaging: 1000 foot spools, 500 foot spools 500 foot nested pull box</p>

Form Revision Date: 04/15/2004