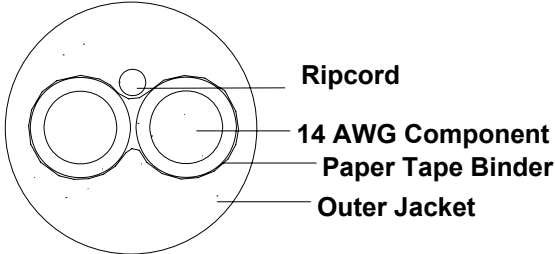



## Product Specification Sheet

**Catalog Number: 14-2C-EX**

Construction Detail	Product Illustration
 <p><b>Ripcord</b> <b>14 AWG Component</b> <b>Paper Tape Binder</b> <b>Outer Jacket</b></p>	
Physical Construction	Description
<p><b>Component 1:</b> 14 AWG 41/30 bare copper conductor PVC Insulation: .015-inch nominal thickness</p>	<p>Riser rated Multi-conductor wire for in-wall distributed audio and control applications and installations in accordance with NEC article 725.</p>
	Color Code
	<p>Black, Red</p>
	Electrical Specifications
<p><b>Final assembly:</b> 2 of component 1 twisted in a 4-inch lay Paper tape binder with 25% overlap Nylon Ripcord under the jacket. Pressure extruded PVC jacket: .030-inch nominal thickness Final construction: .275-inch nominal OD Product Print Legend: <b>LWC 14-2C-EX E190607 (UL) 14 AWG TYPE CL3R 75C ---FAS FPLR FT-4</b> Sequential footmarks are applied in conjunction with the print legend.</p>	<p><b>14 AWG:</b> DCR: 2.66 <math>\Omega</math> per 1000 feet Voltage: 300 Volts RMS Temperature: -20°C to 75°C</p>
	Regulatory Specifications
<p><b>Revision Date: 02/14/2003</b></p> <p>Liberty Wire &amp; Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire &amp; Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>(UL) rated CL3R CSA rated FPLR, FT4 EU RoHS 2002/95/EC Compliant since 06/15/2005</p> <p><b>Jacket Colors:</b> Green, Pink, White</p> <p><b>Packaging:</b> 1000 foot spools, 500 foot nested pull box</p>
Specification Control	Product Information

Form Revision Date: 04/15/2004