


# IH800R / IC803

8" Incandescent Remodel / Baffle with Regressed Lens

DISCONTINUED

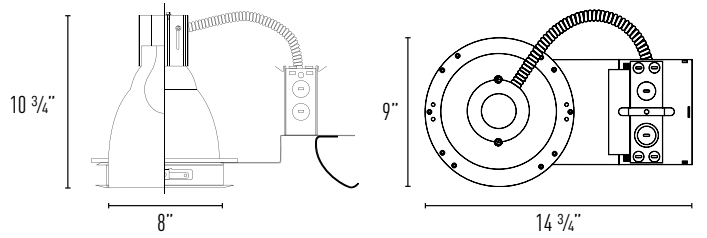

**Cut-out:** 8 1/4"

**DESCRIPTION**

Incandescent recessed downlight providing uniform distribution. For medium to high ceilings. Ideal for task lighting and general lighting.

**LAMP**

- A19 100W max.
- A21 150W max.
- PAR30 75W max.
- PAR38 150W max.
- A23 200W max.

**SOCKET**

E26 medium base

**REFLECTOR OPTICS**

Specification grade reflector with 1.2mm thickness and baffle. 1 1/2" regressed lens available in multiple lens types; Albalite, Sand Blasted, Prismatic, Fresnel, Clear Tempered, or Frosted Spot.

**MOUNTING FRAME**

Frame is constructed from heavy duty galvanized steel. Three high tension springs secure housing into ceiling with up to 5/8" thickness.

**LISTING**

ETL listed for thru-branch wiring and wet locations. For Non-IC recessed installation. ETL listed to US and Canadian standards.

Order Matrix | Example: IH800R

A	
A	Series
IH800R	8" Incandescent Remodel

**8" Baffle with Regressed Lens**

Specification grade reflector with baffle and 1 1/2" regressed lens.

**Specify Lens Type:**

- AB: Albalite, -SB: Sand Blasted, -PR: Prismatic, -FR: Fresnel,
  - CR: Clear Tempered, -FSP: Frosted Spot
- OD: 9"

<b>IC803B-B</b>	Black Baffle / Black Metal Ring
<b>IC803B-MO</b>	Black Baffle / Mocha Metal Ring
<b>IC803B-MW</b>	Black Baffle / White Metal Ring
<b>IC803B-SN</b>	Black Baffle / Satin Nickel Metal Ring
<b>IC803W-B</b>	White Baffle / Black Metal Ring
<b>IC803W-MO</b>	White Baffle / Mocha Metal Ring
<b>IC803W-MW</b>	White Baffle / White Metal Ring
<b>IC803W-SN</b>	White Baffle / Satin Nickel Metal Ring

