



## FEATURES & SPECIFICATIONS

### INTENDED USE

For metal, fiberglass or concrete poles.

### CONSTRUCTION

Steel: Body is galvanized steel tube (per ASTM A-123) constructed from A500 Grade B steel. Welding follows industry standards best practices. Arms are galvanized after fabrication.

Must specify finish. Optional polyester powder and red primer paint finishes available.

### INSTALLATION

Mounting hardware included.

Catalog Number


Notes

Type

Band Mount Bullhorn

# SMACBT

STEEL (SMACBT) BAND MOUNT  
BULLHORN

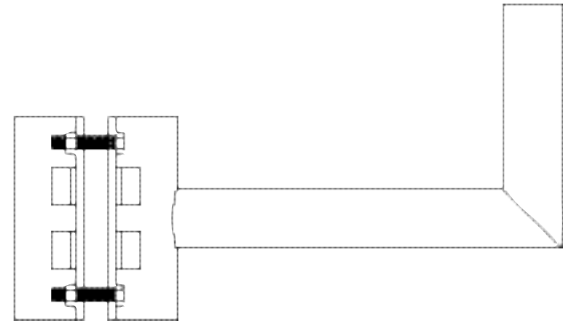

(See next page for dimensions and drawings.)

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.


Example: SMACBT 14/8T RND4 DDB

Series	Tenon length/rise <sup>1</sup>		Pole type/size <sup>2</sup>		Finish <sup>3</sup>
SMACBT	14/8S	14" x 8"	RNDx	Round (x = inches)	<u>Standard colors</u> DDB Dark bronze DWH White DBL Black DNA Natural aluminum GALV Galvanized steel
	14/8T	14" X 8"	SQRx	Square (x = inches)	
			OCTx	Octagonal (x = inches from flat to opposite flat)	
					<u>Primer finish</u> DPRM Red primer
					<u>Architectural colors (powder finish)<sup>3</sup></u>


### NOTES:

- 1 S = Single arm; T = Twin arms.
- 2 Required. Specify pole shaft shape and diameter (in inches) at mounting point.
- 3 Additional colors available; see [www.lithonia.com/archcolors](http://www.lithonia.com/archcolors) or the Architectural Colors brochure (Form No. 794.3).


# SMACBT Band Tenon; Metal, Fiberglass or Concrete Poles





Round pole mounting





Square pole mounting



Octagonal pole mounting

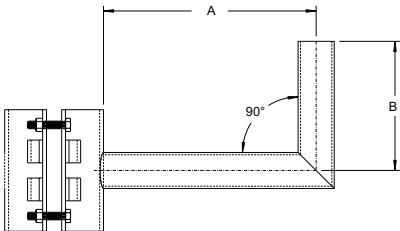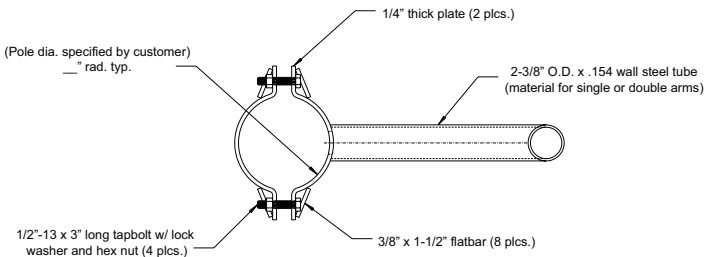

NOTE: Round pole mounting shown. See mounting options for square and octagonal pole mounting.

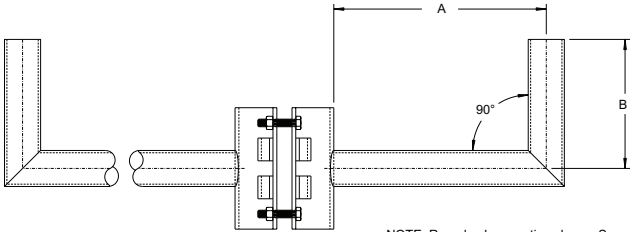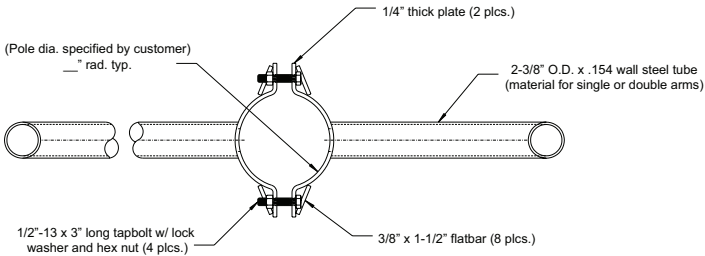

NOTE: Round pole mounting shown. See mounting options for square and octagonal pole mounting.

SMACBT (Band Tenon)								
Lithonia Lighting Catalog Number	Nominal arm length (ft.)	Dimensions (in.)			Bracket weight (lbs.)	Max. fixture EPA ft² @ 80 mph w/1.3 gusts	Max. fixture weight (lbs.)	ANSI C136.3 (1995) class rating @ 80 mph
		A	B	C				
SMACBT 14/8S RNDx	1	14	8	n/a	23	2.4	80	E
SMACBT 14/8T RNDx	1	14	8	n/a	40	2.4	80	E
SMACBT 14/8S SQRx	1	14	8	n/a	23	2.4	80	E
SMACBT 14/8T SQRx	1	14	8	n/a	40	2.4	80	E

**IMPORTANT:**

- These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

**CAUTION:**

- The arms described herein are designed for applications in areas of normal winds. Consult the factory prior to the design of systems to be mounted on structures such as bridges or buildings, or areas known to have abnormal winds such as airports or coastal areas. Failure to consider these factors in the system design could result in the failure of the pole or mast arm, and consequently personal injury or property damage.