

MASON INDUSTRIES, Inc.


Manufacturers of Vibration Control Products

350 Rabro Drive
Hauppauge, NY 11788
631/348-0282
FAX 631/348-0279
Info@Mason-Ind.com

2101 W. Crescent Ave., Suite D
Anaheim, CA 92801
714/535-2727
FAX 714/535-5738
Info@MasonAnaheim.com

JOB NAME _____
CUSTOMER _____
CUSTOMER P.O. _____
MASON M.I. _____
DWG. NO. _____

SPS
SPOOL TYPE
ACOUSTICAL
PIPE SEALS

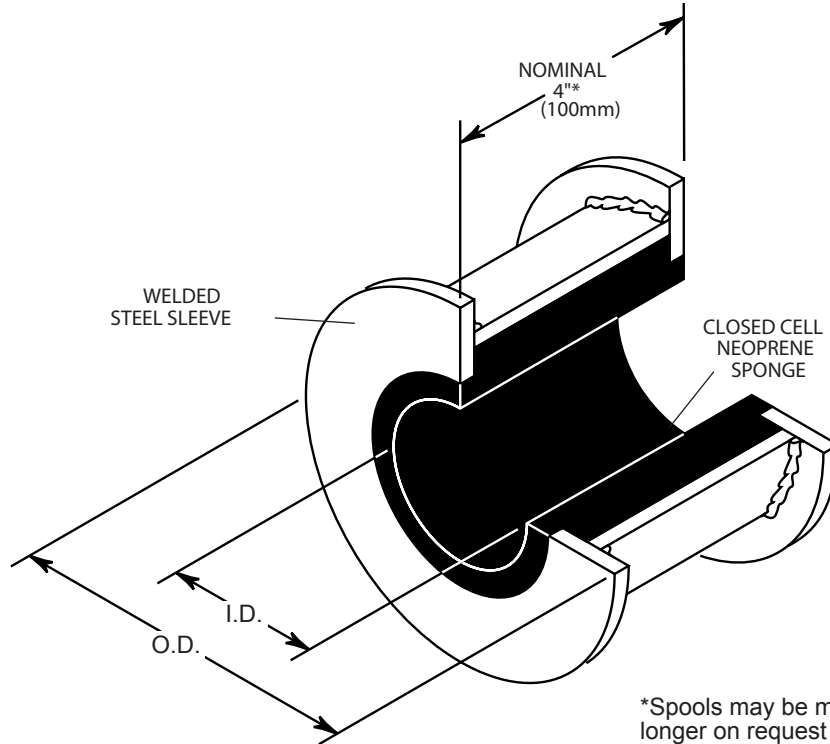

*Spools may be made longer on request

TYPE SPS DIMENSIONS

Spool Piece For Pipe Size in (mm)	I.D. in (mm)	O.D. in (mm)
1/2 (13)	7/8 (22)	4 (102)
3/4 (19)	11/16 (27)	4 (102)
1 (25)	13/8 (35)	4 3/4 (121)
1 1/4 (32)	1 11/16 (43)	5 (127)
1 1/2 (38)	1 7/8 (48)	5 1/4 (133)
2 (51)	2 3/8 (60)	5 1/2 (140)
2 1/2 (64)	2 7/8 (73)	6 1/2 (165)
3 (76)	3 1/2 (89)	7 3/4 (197)
3 1/2 (89)	4 (102)	7 3/4 (197)
4 (102)	4 1/2 (114)	7 3/4 (197)
5 (127)	5 9/16 (141)	9 3/4 (248)
6 (152)	6 5/8 (168)	9 3/4 (248)
8 (203)	8 5/8 (219)	11 3/4 (298)
10 (254)	10 3/4 (273)	15 (381)
12 (305)	12 3/4 (324)	17 (432)

INSTALLATION PROCEDURE

If pipe is to be installed before wall construction:

1. Slide SPS onto pipe.
2. Hang pipe.
3. Build or pour wall around SPS, caulk any cracks.

If pipe is to be installed in hole in wall:

1. Slide SPS onto pipe.
2. Pass pipe thru hole and position SPS in hole.
3. Pack concrete around SPS and caulk any cracks.

If pipe is to be installed thru SPS cast into wall:

1. Cast SPS into wall as wall is being built.
2. Slide pipe thru SPS.
3. Caulk any cracks.

CERTIFICATION DATA