

# ELX-504

## LED Exit With Emergency Circuit (Dual Circuit)

Architectural

Catalog Number:

Project Name:

Type:

Note:

**MAXILUME**  
ARCHITECTURAL LIGHTING



### FEATURES

This fixture meets the highest standards of simple and fast installation, aesthetic appearance, and economical energy consumption. It takes advantage of a self-generated source of power available on site in emergencies. The long-life LEDs in the fixture consume very low levels of energy - less than 2 watts - and are rated for a life of up to 25 years.

### BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Every fixture includes a canopy, extra faceplate, and replaceable chevron directional indicator knockouts for control of direction.
- Components shaped by precision injection molding and has 1/2" knockouts for the supply of power.

### FACE

- Single or dual configuration. Solid face included if single face appearance is preferred
- 6" high text with color diffusion
- Knockout directional chevrons

### MOUNTING


- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided.

### ELECTRICAL

- 120V or 277V input
- Consumes only 2 watts of power
- LED light source
- Protected against short circuits and power surges
- Second circuit allows the use of alternate power sources in emergencies

### LISTED

- UL 924, NFPA, NEC, State & Municipal
- Damp location approved

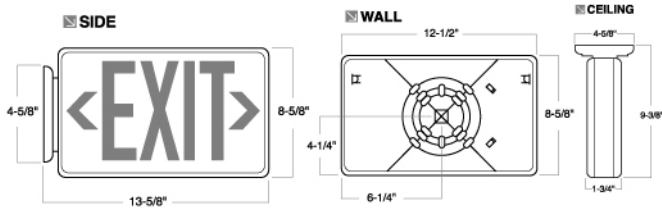

**ELX-504** - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	FACES	CANOPY
<input type="checkbox"/> G - Green	<input type="checkbox"/> W - White	(2) OPTIONAL BLANK FACE INCLUDED	UNIVERSAL MOUNT TO WALL OR CEILING
<input type="checkbox"/> R - Red	<input type="checkbox"/> B - Black		



**Specified:**

**ELX-504**

LETTER COLOR

HOUSING COLOR

**MAXILUME**  
ARCHITECTURAL LIGHTING

A division of  
**Elite Lighting**

Submittal form is available @ [www.maxilume.com](http://www.maxilume.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011