



FABRIC-SHIELD™ PULL-DOWN STORM SHUTTER ORDER FORM

Date: _____

Business Name: _____

Account #: _____

Phone #: _____

FAX #: _____

Contact Name: _____


Job Name/P.O.# : _____

SHUTTER MEASUREMENT NOTES:

- Refer to installation documents & engineering drawings
 - Minimum 2 inch* edge distance for all anchors into concrete
 - Minimum 2 ½ inch* distance for all anchors into hollow block
 - Minimum 1 ¼ inch & maximum 2 ¼ inch from the edge of the finish is recommended for wood framing
 - Fastener holes to be drilled in the field. Use 7/16" as illustrated (this reflects the change in fastener hole position).
- *Edge distance excludes stucco, foam, brick and other exterior wall finishes.

LOCK PIN NOTES:

- Each unit will include 2 – 6" lock pins as standard equipment
- Custom lock pin can be ordered in length up to 60" (\$10/set)
- Recommended custom lock pin measurement is:
Span / 2 * .67 (round to the nearest whole inch).

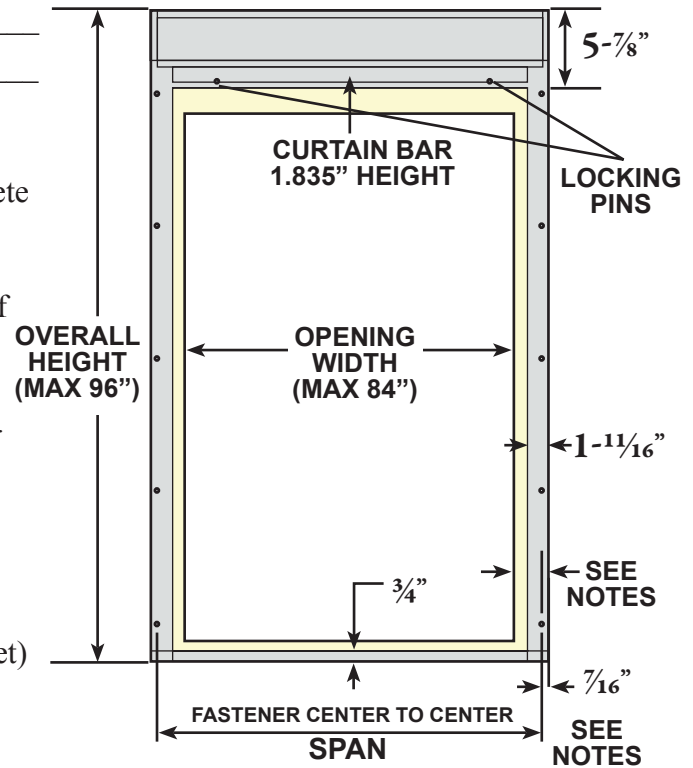

Qty	Span	Overall Height	Custom Lock Pins? Yes/No	Custom Lock Pin Length	Special Instructions

