



ECHO VELOCITY 3.5 LED INTERIOR WALL EIW11909



Designed with the unique, asymmetric shape of the Echo Velocity family, Velocity 3.5 LED combines an organic form with long-lasting LED lamp options. Offering interior and exterior versions with multiple mounting options, Velocity 3.5 LED can effectively light an entire project. Velocity delivers the quality illumination and efficient light control the Echo family is known for.

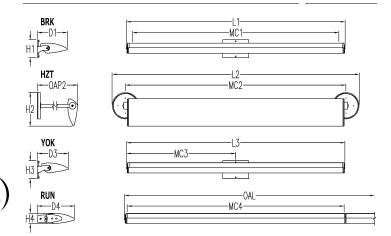

Dimensions

JOB NAME

L1	L2	L3	OAP 2	MC1	MC2	MC3	MC4	H1	H2	НЗ	H4	D1	D3	D4
							50.7 in							
1288	1453	1285	655	1214	1295	643	1288	107	198	107	61	178	185	221
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm

Weight

Shipping weight: 25.0 lb (11.4 kg).

Features

- Standard thermoset polyester powder coat paint provides durable protection in a palette of color options. Custom colors available upon request.
- Extruded aluminum construction provides durable protection for internal components and is recyclable.
- Field adjustable housing locks into position, enabling precise fixture alignment for high-quality design performance.
- Stainless steel external fasteners will not rust or corrode.
- · Cast aluminum end caps protect internal components and are recyclable.
- Integral Class II power supply included, eliminating the need for remote mounting, simplifying installation.

Technical Notes

Accessories

· Dust cover lens standard.

Electrical

- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.
- SPI uses strict quality guidelines in LED selection to ensure the White LED's we use meet or exceed ANSI Binning Standards (ANSI C78.733).
- 0-10v dimmable power supply standard with white LEDs.

Finish

 Housing and mounting components painted to match, unless otherwise specified.

Lamping/lamp

• L70 life= 50,000+ hours.

Mounting

- Aluminum cover fits over a standard 4" octagonal junction box.
- INSTALLATION NOTES: During installation the contractor is responsible to
 use actual fixtures to ensure accurate mounting centers from one fixture to
 the next along the length of the linear run.

Additional Documents

Color Chart (http://www.specSPI.com/PDFs/SPI_Color_Chart.pdf)



MODEL NUMBER LIGHT SOURCE FINISH LAMP OPTI					TIONS	OPTIONS								
Not a	l options are availa	ble in all c	onfigurations, con:	sult factory f	for details.									
Light Source							Lamp Options			(Options			
L15.2WC-DML 120- 277V)-	White 15.2W HD LED Light Engine Dimming				3000K	3000K 3000K Cct			BRK	Bracket Mour	Mount	
		Delivered Lume	ns: 1,403		CITY35LEDI ESZIP	3500K	3500K C	Cct		HZT	Horizontal M	ount		
\Box	L28.7WC-DML 120-		White 28.7W HD LED Light Engine Dimming Delivered Lumens: 2,641			ECHOVELO CITY35LEDI	4000K	4000K C	Cct		RUN	Continuous F	łun	
277V		•					EMR	Emergency Ballast Remote			YOK	Yoke Mount		
			White F7 OW LID LED Light Feeing Direction			ESZIP ECHOVELO							ength Other Than	
L57.3WC-DML 120- 277V		,-	White 57.3W HD LED Light Engine Dimming Delivered Lumens: 5,283			CITY35LEDI				_		Standard.		
						ESZIP								
	157.3W 120-277V		Amber 57.3W LED	D Light Engir	ne 590nm									
B57.3W 120-277V Blue 57.3W LED Light Engine 470nm				470nm										
G57.3W 120-277V Green 57.3W LED Light Engine 525nm														
R57.3W 120-277V Red 57.3W LED Light Engine 625nm														
C57.3W 120-277V RGB 57.3W LED Light Engine														
Paint	ed Finishes													
PT01	SuperWhite	PT07	Light Taupe	PT13	Warm Gray	PT19	Blue	PT29	Red Brass	PT42	Sky Blue	PT48	Brass	
PT02	White	PT08	Medium Taupe	PT14	Light Gray	PT20	Dark Green	PT31	Medium Bronze	PT43	Teal	PT49	Bronze	
PT03	Morning Light	PT09	Medium Gray	PT15	Sage	PT21	Pearl White	PT32	Dark Bronze	PT44	Green			
PT04	Warm White	PT10	Dark Gray	PT16	Spruce	PT22	Platinum	PT33	Dark Blue	PT45	Purple			
PT05	Putty	PT11	Black	PT17	Red	PT27	Deep Copper	PT40	Yellow	PT46	Aluminum			
PT06	Warm Beige	PT12	Dark Chocolate	PT18	Deep Red	PT28	Dark Stainless	PT41	Orange	PT47	Deep Red Brass	3		