

MONET INTERIOR CEILING

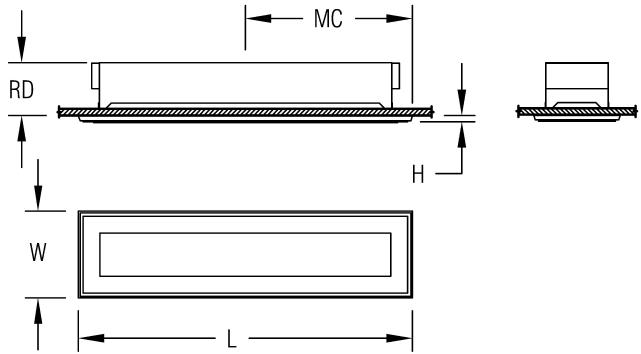
AIC10479



With a flash of style and a touch of class, Advent Monet makes a lasting impression. Distinctive motifs provide an artistic twist, while vivid color gels and luminous glowing edges complete an energetic design. The Monet family consists of interior sconces, pendants and ceiling mounts, as well as exterior wall mounts. Efficient linear fluorescent lamping and long-lasting LED options allow Monet to empower a space in a simple, elegant form. Monet's interior ceiling luminaires are UL listed for Damp Locations and is fully recessed, surface mount models also available. In addition to being compatible with the Armstrong® TechZone™ Ceiling System, Monet's ceiling mounts allow a lighting design to envelope an entire space. Interior Monet's white or optional colored face is balanced by a matching or white luminous edge

JOB NAME

TYPE



Dimensions

W	L	H	RD	MC
6.7 in	26.0 in	0.5 in	4.1 in	13.0 in
170 mm	660 mm	13 mm	104 mm	330 mm

Weight

Hanging weight: 25.0 lb (11.4 kg).

Features

- Formed metal construction provides durable protection for internal components and is recyclable.
- Fixture design allows relamping without the use of tools, simplifying maintenance.
- External fasteners are not visible, providing a clean fixture design.
- Frosted acrylic lens gives the fixture a unique identity with light reflected through the polished edge.
- Durable wood laminate faceplate option adds a warm, natural texture to a space.
- Fixture adds a splash of color to a space with theatrical color gels. Standard colors are available with other colors available upon request. Contact factory to customize a color gel that coordinates with your application.
- Embossed stainless steel-linear and crosshatch face plate option adds a unique, metal accent and texture to a space.
- Standard thermoset polyester powder coat paint provides durable protection in a palette of color options. Custom colors available upon request.
- Integral Class II power supply included, eliminating the need for remote mounting, simplifying installation.

Technical Notes

Construction

- Optional motif is black, unless specified.

Electrical

- Advent uses strict quality guidelines in LED selection to ensure the white LED's we use meet or exceed ANSI Binning Standards (ANSI C78.733).
- Integral electronic fluorescent ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while eliminating the need for remote mounting and simplifying installation.
- Meets NEC 410.73 double-ended, fluorescent lamp ballast disconnect requirements.
- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.

Lamping/lamp

- L70 life= 50,000+ hours.
- Fluorescent lamps are 3500K unless specified.
- Lamps included, with the exception of T8, T5 and incandescent.

Mounting

- Capable of 1/2 IP conduit connection.










Additional Documents

[Color Chart \(http://www.specAdvent.com/pdfs/advent\\_color\\_chart.pdf\)](http://www.specAdvent.com/pdfs/advent_color_chart.pdf)

MODEL NUMBER	LIGHT SOURCE	FINISH	VOLTAGE	LAMP OPTIONS	OPTIONS	COLOR ACCENTS

Not all options are available in all configurations, consult factory for details.

#### Light Source

		Photometry
<b>L28.7W</b>	White 28.7W 3.2W/6" LED Light Engine <b>Delivered Lumens: 1,047</b>	26IN REC CLG LED LOW
<b>L57.3W</b>	White 57.3W 6.4W/6" LED Light Engine <b>Delivered Lumens: 2,095</b>	26IN REC CLG LED HIGH
<b>1F14</b>	 1F14WT5/Mini Bipin	
<b>1F14DM</b>	 1F14WT5/Mini Bipin Dimming	
<b>1F17</b>	 1F17WT8/Med Bipin	
<b>1F24</b>	 1F24WT5HO/Mini Bipin	
<b>1F24DM</b>	 1F24WT5HO/Mini Bipin Dimming	
<b>2F14</b>	 2F14WT5/Mini Bipin	
<b>2F14DM</b>	 2F14WT5/Mini Bipin Dimming	
<b>2F24</b>	 2F24WT5HO/Mini Bipin	
<b>2F24DM</b>	 2F24WT5HO/Mini Bipin Dimming	

<sup>1</sup> T5 & T8 Fluorescent Linear Lamp(s) Not Included

<sup>2</sup> DML with LED light engine only.

#### Voltage

<b>120V</b>	120 Volt
<b>120-277V</b>	Universal Voltage
<b>277V</b>	277 Volt
<b>Lamp Options</b>	
<b>3000K</b>	3000K Cct
<b>DML<sup>2</sup></b>	0-10V Dimming
<b>3500K</b>	3500K Cct
<b>4000K</b>	4000K Cct
<b>EMI</b>	Emergency Ballast Integral

#### Options

<b>ES1</b>	Embossed Stainless Steel-linear Pattern
<b>ES2</b>	Embossed Stainless Steel-cross Hatch Pattern
<b>FP01</b>	Open
<b>FP02</b>	Boxes
<b>FP03</b>	Cross Ends
<b>FP04</b>	Split
<b>FP05</b>	Split 2
<b>FP06</b>	Prairie
<b>FP07</b>	Thatch
<b>FP08</b>	Squares
<b>FP09</b>	Perforated
<b>FP10</b>	Parquet
<b>WF1</b>	Cherry Laminate
<b>WF2</b>	Maple Laminate

#### Color Accents

<b>CG01</b>	Red Color Gel
<b>CG02</b>	Orange Color Gel
<b>CG03</b>	Green Color Gel
<b>CG04</b>	Blue Color Gel

#### Painted Finishes

PT01 SuperWhite	PT07 Light Taupe	PT13 Warm Gray	PT19 Blue	PT29 Red Brass	PT42 Sky Blue	PT48 Brass
PT02 White	PT08 Medium Taupe	PT14 Light Gray	PT20 Dark Green	PT31 Medium Bronze	PT43 Teal	PT49 Bronze
PT03 Morning Light	PT09 Medium Gray	PT15 Sage	PT21 Pearl White	PT32 Dark Bronze	PT44 Green	
PT04 Warm White	PT10 Dark Gray	PT16 Spruce	PT22 Platinum	PT33 Dark Blue	PT45 Purple	
PT05 Putty	PT11 Black	PT17 Red	PT27 Deep Copper	PT40 Yellow	PT46 Aluminum	
PT06 Warm Beige	PT12 Dark Chocolate	PT18 Deep Red	PT28 Dark Stainless	PT41 Orange	PT47 Deep Red Brass	

#### Metal and Plated Finishes

BAL	Brushed Aluminum
-----	------------------

#### Kit Details

