


SEBRING INTERIOR WALL


AIW9676

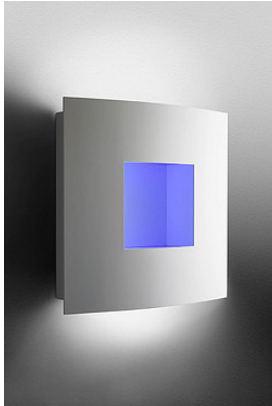

The Sebring ADA compliant sconce provides path of egress lighting with sophisticated style. Sebring eliminates the need for unattractive secondary emergency units with its integral emergency option. Color gels can add a vivid splash of color to a space and complement our palette of powder coat or metal finishes. Sebring enhances a project by allowing design continuity, inside and out.

JOB NAME

TYPE

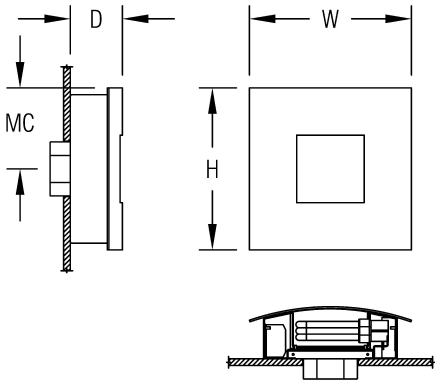

Dimensions

W	H	D	MC
12.0 in	12.0 in	3.8 in	6.0 in
305 mm	305 mm	97 mm	152 mm

Weight

Hanging weight: 25.0 lb (11.4 kg).

Features

- Integral Class II power supply included, eliminating the need for remote mounting, simplifying installation.
- TL (top lens) and BL (bottom lens) standard with any LED module.
- Formed metal construction provides durable protection for internal components and is recyclable.
- 3-D open window provides a sense of depth in a low-profile, ADA compliant fixture.
- Fixture adds a splash of color to a space with theatrical color gels. Standard colors are available with other colors available upon request. Contact factory to customize a color gel that coordinates with your application.
- Emergency battery provides a minimum of 90 minutes illumination, meeting National Fire Protection Association Life Safety Code requirements. Consult factory for lumen output.
- Compliant with Americans with Disabilities Act (ADA) requirements.

Technical Notes

Electrical

- Advent uses strict quality guidelines in LED selection to ensure the white LED's we use meet or exceed ANSI Binning Standards (ANSI C78.733).
- Integral electronic fluorescent ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while eliminating the need for remote mounting and simplifying installation.
- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.

Lamping/lamp

- L70 life= 50,000+ hours.
- Fluorescent lamps are 3500K unless specified.

Mounting

- Mounts to standard 4" octagonal junction box.

Additional Documents

[Color Chart \(http://www.specAdvent.com/pdfs/advent_color_chart.pdf\)](http://www.specAdvent.com/pdfs/advent_color_chart.pdf)

MODEL NUMBER	LIGHT SOURCE	FINISH	VOLTAGE	LAMP OPTIONS	COLOR ACCENTS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Not all options are available in all configurations, consult factory for details.

Light Source			Photometry	Voltage		Color Accents	
L7.2W	White 7.2W 3.2W/6" LED Light Engine Delivered Lumens: 207		12IN SQ WS LED LOW	120-277V	Universal Voltage	CG00	White Color Gel
				120V	120 Volt	CG01	Red Color Gel
				277V	277 Volt	CG02	Orange Color Gel
L14.3W	White 14.3W 6.4W/6" LED Light Engine Delivered Lumens: 415		12IN SQ WS LED HIGH	Lamp Options		CG03	Green Color Gel
2F26	2CFQ26W/G24q		ITL56900	3000K	3000K Cct	CG04	Blue Color Gel
2F26DM	2CFQ26W/G24q Dimming		ITL56900	DML ¹	0-10V Dimming		
2F32	2CFTR32W/GX24q		ITL56900	BL	Bottom Lens		
2F32DM	2CFTR32W/GX24q Dimming		ITL56900	3500K	3500K Cct		
2F42	2CFTR42W/GX24q		ITL56900	4000K	4000K Cct		
2F42DM	2CFTR42W/GX24q Dimming		ITL56900	TL	Top Lens		
				EMI	Emergency Ballast Integral		

¹ DML with LED light engine only.

Painted Finishes

PT01	SuperWhite	PT07	Light Taupe	PT13	Warm Gray	PT19	Blue	PT29	Red Brass	PT42	Sky Blue	PT48	Brass
PT02	White	PT08	Medium Taupe	PT14	Light Gray	PT20	Dark Green	PT31	Medium Bronze	PT43	Teal	PT49	Bronze
PT03	Morning Light	PT09	Medium Gray	PT15	Sage	PT21	Pearl White	PT32	Dark Bronze	PT44	Green		
PT04	Warm White	PT10	Dark Gray	PT16	Spruce	PT22	Platinum	PT33	Dark Blue	PT45	Purple		
PT05	Putty	PT11	Black	PT17	Red	PT27	Deep Copper	PT40	Yellow	PT46	Aluminum		
PT06	Warm Beige	PT12	Dark Chocolate	PT18	Deep Red	PT28	Dark Stainless	PT41	Orange	PT47	Deep Red Brass		

Metal and Plated Finishes

BAL	Brushed Aluminum
-----	------------------

Kit Details