

VIENNA INTERIOR WALL


AIW8846

JOB NAME

TYPE



EMI

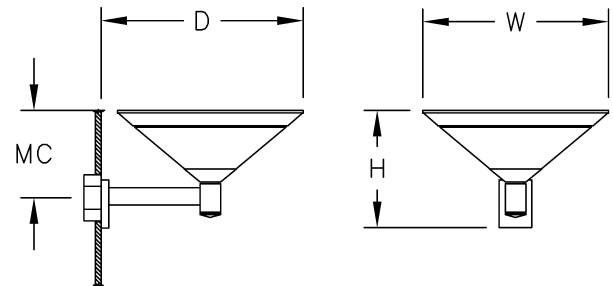

Our cone collection offers a look previously not available in the market with high-output optical packages. From our fully sealed H.I.D. optical offerings, to our dual chamber optics, we've taken difficult geometric volume and created luminous visual comfort and high-output indirect lighting in a contemporary form. This collection offers two trim styles and includes efficient high-output fluorescent, H.I.D. and LED optical solutions. The family includes pendant, chandelier, wall-mounted and ceiling models to illuminate and enhance environments where you are looking for a distinct, strong form and proven optical performance.

Dimensions

W	H	D	MC
16.0 in	10.2 in	17.5 in	7.5 in
406 mm	259 mm	444 mm	190 mm

Weight

Hanging weight: 25.0 lb (11.4 kg).

Features

- Integral Class II power supply included, eliminating the need for remote mounting, simplifying installation.
- Spun metal trim ring adds high-quality, decorative element to fixture.
- Formed metal construction provides durable protection for internal components and is recyclable.
- Opal acrylic diffuser lens enhances a space with filtered illumination.
- Hinge and latch assembly simplifies relamping by eliminating the need to remove and manage fixture bowl.

Technical Notes

Electrical

- Advent uses strict quality guidelines in LED selection to ensure the white LED's we use meet or exceed ANSI Binning Standards (ANSI C78.733).
- Integral electronic fluorescent ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while eliminating the need for remote mounting and simplifying installation.
- Thermally protected ballast limits operating temperature.
- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.

Lamping/lamp

- L70 life= 50,000+ hours.
- Fluorescent lamps are 3500K unless specified.

Mounting


- Additional mounting structure and hardware required (by others).
- Mounts to standard 4" octagonal junction box.

Additional Documents

[Color Chart \(http://www.specAdvent.com/pdfs/advent_color_chart.pdf\)](http://www.specAdvent.com/pdfs/advent_color_chart.pdf)

MODEL NUMBER	LIGHT SOURCE	FINISH	VOLTAGE	LAMP OPTIONS	OPTIONS	COLOR ACCENTS

Not all options are available in all configurations, consult factory for details.

Light Source		Photometry	Voltage		Options
L21.5W	White 21.5W 3.2W/6" LED Light Engine Delivered Lumens: 2,129	16IN ARM WS LED LOW	120-277V	Universal Voltage	MA01 Matte Acrylic
L43.0W	White 43.0W 6.4W/6" LED Light Engine Delivered Lumens: 4,258	16IN ARM WS LED HIGH	120V	120 Volt	Color Accents
1F22	 ¹ 1F22WT5/CIRC		277V	277 Volt	HP01 Silver Hand Painted Acrylic
			Lamp Options		HP02 Beige Hand Painted Acrylic
			DML ²	0-10V Dimming	HP03 Amber Hand Painted Acrylic
			3000K	3000K Cct	
			3500K	3500K Cct	
			4000K	4000K Cct	
			EMI	Emergency Ballast Integral	
			F	Fusing	

¹ T5 & T8 Fluorescent Linear Lamp(s) Not Included
² DML with LED light engine only.

Painted Finishes

PT01 SuperWhite	PT07 Light Taupe	PT13 Warm Gray	PT19 Blue	PT29 Red Brass	PT42 Sky Blue	PT48 Brass
PT02 White	PT08 Medium Taupe	PT14 Light Gray	PT20 Dark Green	PT31 Medium Bronze	PT43 Teal	PT49 Bronze
PT03 Morning Light	PT09 Medium Gray	PT15 Sage	PT21 Pearl White	PT32 Dark Bronze	PT44 Green	
PT04 Warm White	PT10 Dark Gray	PT16 Spruce	PT22 Platinum	PT33 Dark Blue	PT45 Purple	
PT05 Putty	PT11 Black	PT17 Red	PT27 Deep Copper	PT40 Yellow	PT46 Aluminum	
PT06 Warm Beige	PT12 Dark Chocolate	PT18 Deep Red	PT28 Dark Stainless	PT41 Orange	PT47 Deep Red Brass	

Metal and Plated Finishes

BAL Brushed Aluminum	DTBR Dark Tint Brass	SNBR Satin Nickel Brass	CPST Chrome Plated Steel
BBR Brushed Brass	PBR Polished Brass	ANST Antique Brass Plated Steel	PBST Polished Brass Plated Steel
ATBR Antique Tinted Brass	CPBR Chrome Plated Polished Brass	BBST Brushed Brass Plated Steel	SNST Satin Nickel Steel

Kit Details