


Introduction

The CR95HF development software (STSW-95HF001) is a PC software which allows to configure, evaluate, and communicate with ST CR95HF 13.56 MHz multiprotocol contactless transceiver.

The software must be used in conjunction with the DEMO-CR95HF-A demonstration kit (see [Figure 1](#)) which includes a ready-to-use board to interface with the host PC through a USB interface.

The DEMO-CR95HF-A is powered through the USB bus and no external power supply is required. It includes a CR95HF contactless transceiver, a 48 x 34 mm 13.56 MHz inductive etched antenna and the associated tuning components. The CR95HF communicates with the STM32F103CB 32-bit core MCU via the SPI bus.

Figure 1. DEMO-CR95HF-A board

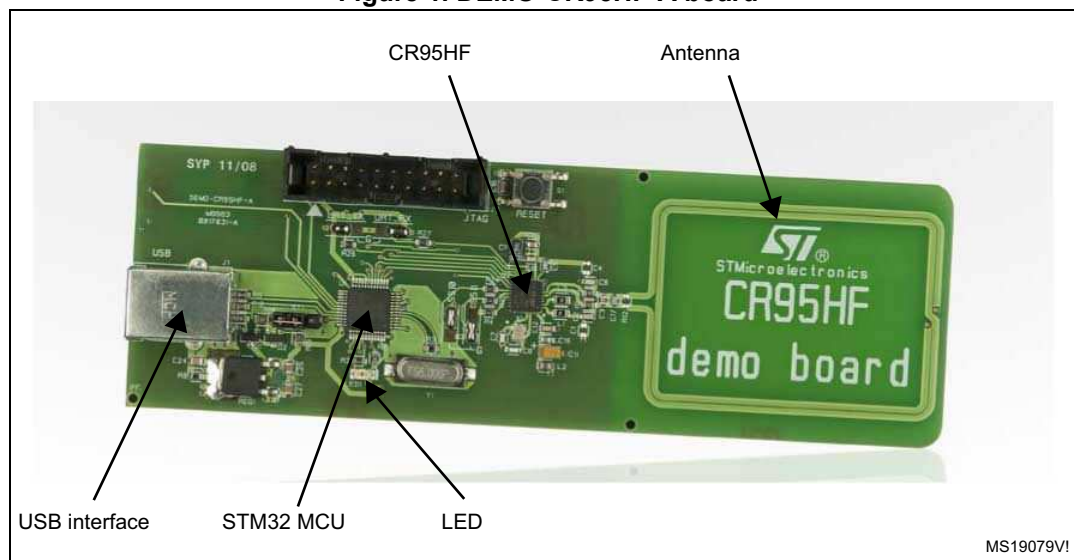

Reference documents

- DEMO-CR95HF-A databrief
- CR95HF datasheet

Contents

1	Installing the CR95HF development software (STSW-95HF001)	4
2	Using the CR95HF development software	9
2.1	Launching the CR95HF development software	9
2.2	Main menu	11
2.3	CR95HF commands menu	12
2.3.1	01: IDN	14
2.3.2	02: Protocol Select	15
2.3.3	04: SendRecv	18
2.3.4	07: Idle	19
2.3.5	08: RdReg	19
2.3.6	0A: Set UART baud rate	19
2.3.7	55: Echo	20
2.4	ISO15693 menu	21
2.5	ISO14443-B menu	25
2.6	ISO14443-A menu	27
2.7	ISO18092 menu	29
2.8	Tools menu	31
2.8.1	DEMO-CR95HF-A toolbox	32
2.8.2	Tag Detection tool	33
2.8.3	Auto detection tool	34
2.8.4	Script tool	35
2.9	Help menu	36
2.10	Log window	39
3	Revision history	40

List of figures

Figure 1.	DEMO-CR95HF-A board	1
Figure 2.	setup.exe welcome message	4
Figure 3.	setup.exe licence agreement	5
Figure 4.	Select the destination folder	5
Figure 5.	Insert the CR95HF development software from the start menu	6
Figure 6.	Create desktop or quick launch icons (optional)	6
Figure 7.	Install the CR95HF development software on your computer	7
Figure 8.	Install the CR95HFdll.dll	7
Figure 9.	Read the CR95HF development software README	8
Figure 10.	Launch the CR95HF development software	8
Figure 11.	DEMO-CR95HF-A detection message 1/3	9
Figure 12.	DEMO-CR95HF-A detection message 2/3	10
Figure 13.	DEMO-CR95HF-A detection message 3/3	10
Figure 14.	Main menu	11
Figure 15.	Selecting the CR95HF commands menu	12
Figure 16.	CR95HF user interface menu	13
Figure 17.	IDN window	14
Figure 18.	Protocol Select window	15
Figure 19.	Field OFF window	15
Figure 20.	ISO15693 window	16
Figure 21.	ISO14443-A window	16
Figure 22.	ISO14443-B window	17
Figure 23.	ISO18092 window	17
Figure 24.	ISO15693 Inventory (260100) transmitted using a SendRecv request	18
Figure 25.	Idle window	19
Figure 26.	RdReg window	19
Figure 27.	Set UART baud rate window	20
Figure 28.	Echo window	20
Figure 29.	ISO15693 menu	21
Figure 30.	Example of ISO15693 user interface for M24LR64	23
Figure 31.	Selecting User Mode from ISO15693 user interface (M24LR64)	24
Figure 32.	ISO14443-B menu	25
Figure 33.	Example of ISO14443-B user interface	26
Figure 34.	Example of ISO14443-B user interface for SRIxxx	26
Figure 35.	ISO14443-A menu	27
Figure 36.	ISO14443-A selected from the list	28
Figure 37.	ISO18092 menu	29
Figure 38.	ISO18092 log window	30
Figure 39.	Tools menu	31
Figure 40.	DEMO-CR95HF-A toolbox	32
Figure 41.	Tag detection interface	34
Figure 42.	Auto Detect tool interface	35
Figure 43.	Script tool interface	36
Figure 44.	Help menu	37
Figure 45.	Change background color menu	37
Figure 46.	Script help	38
Figure 47.	About window	38
Figure 48.	Log window for an Idle command	39

1 Installing the CR95HF development software (STSW-95HF001)

To install the CR95HF development software (STSW-95HF001):

1. Download the latest revision of the CR95HF development software from <http://www.st.com>.
2. Unzip the setup.zip file.
3. Execute the setup.exe file to install the CR95HF development software on your computer. Follow the instructions described in [Figure 2](#) to [Figure 10](#) to install the CR95HF development software under C:\Program files, and CR95HFDll.dll system file under C:\WINDOWS\system32.

When the installation process is complete, you can launch the CR95HF development software. Refer to [Section 2](#) for a detailed description of the software functions.

Figure 2. setup.exe welcome message



Figure 3. setup.exe licence agreement

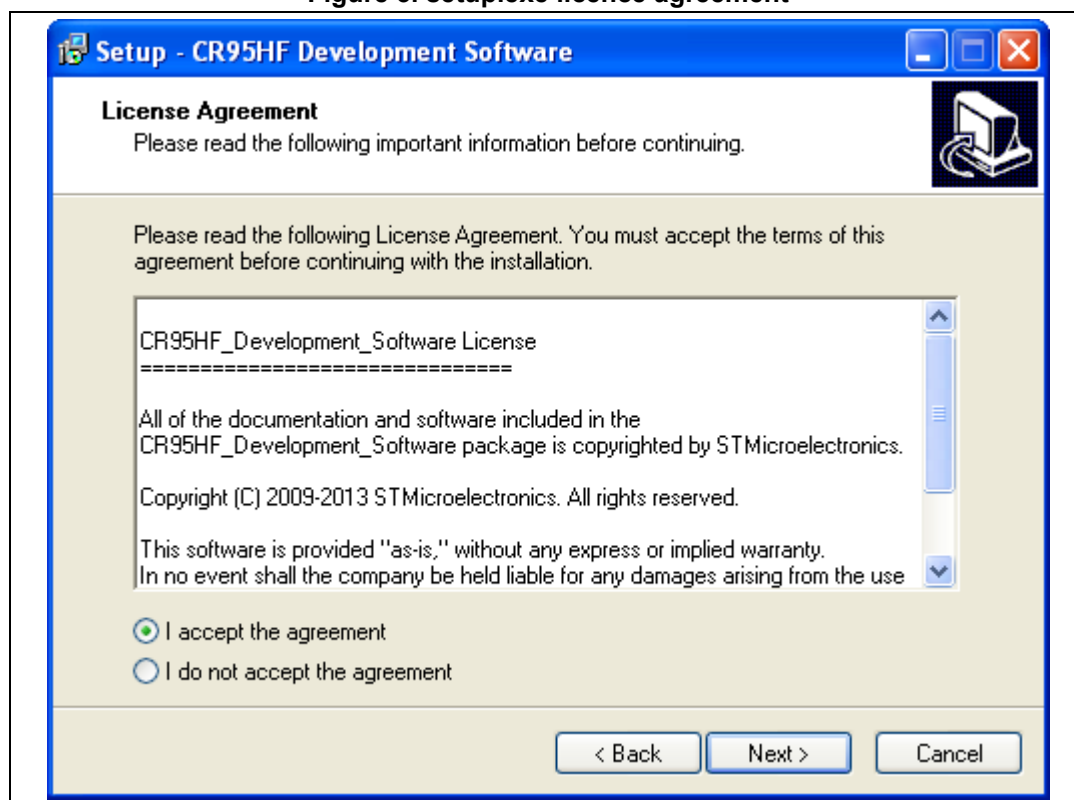


Figure 4. Select the destination folder

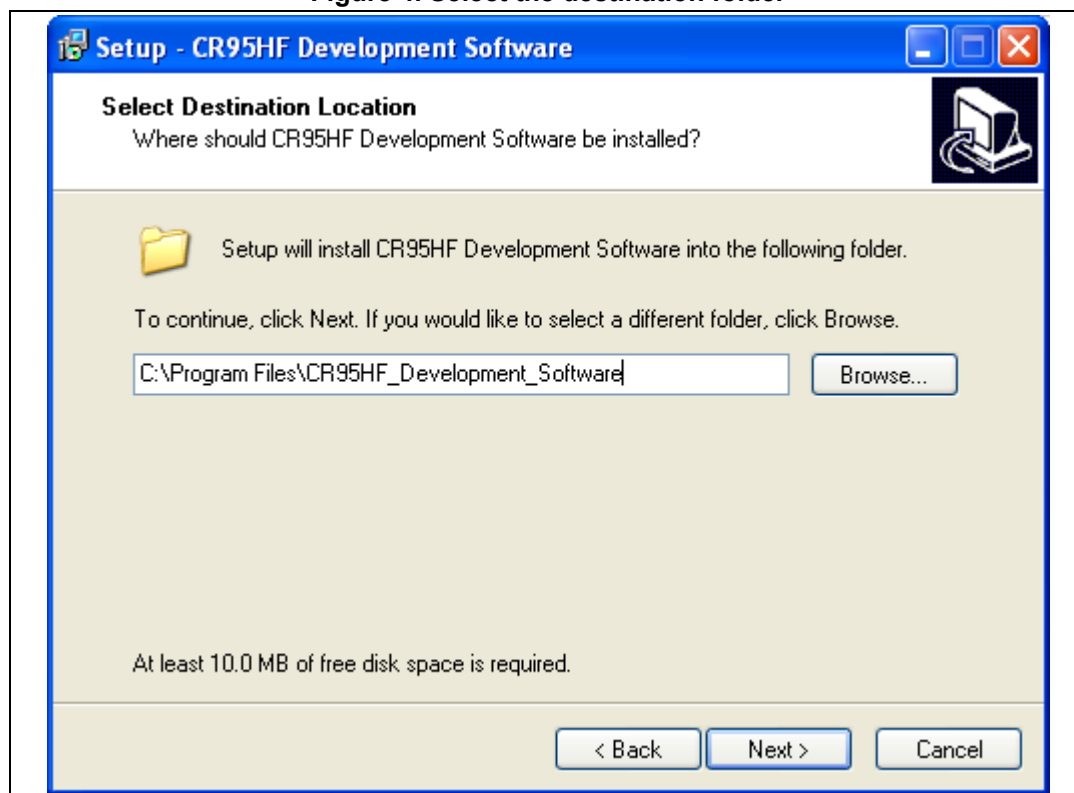


Figure 5. Insert the CR95HF development software from the start menu

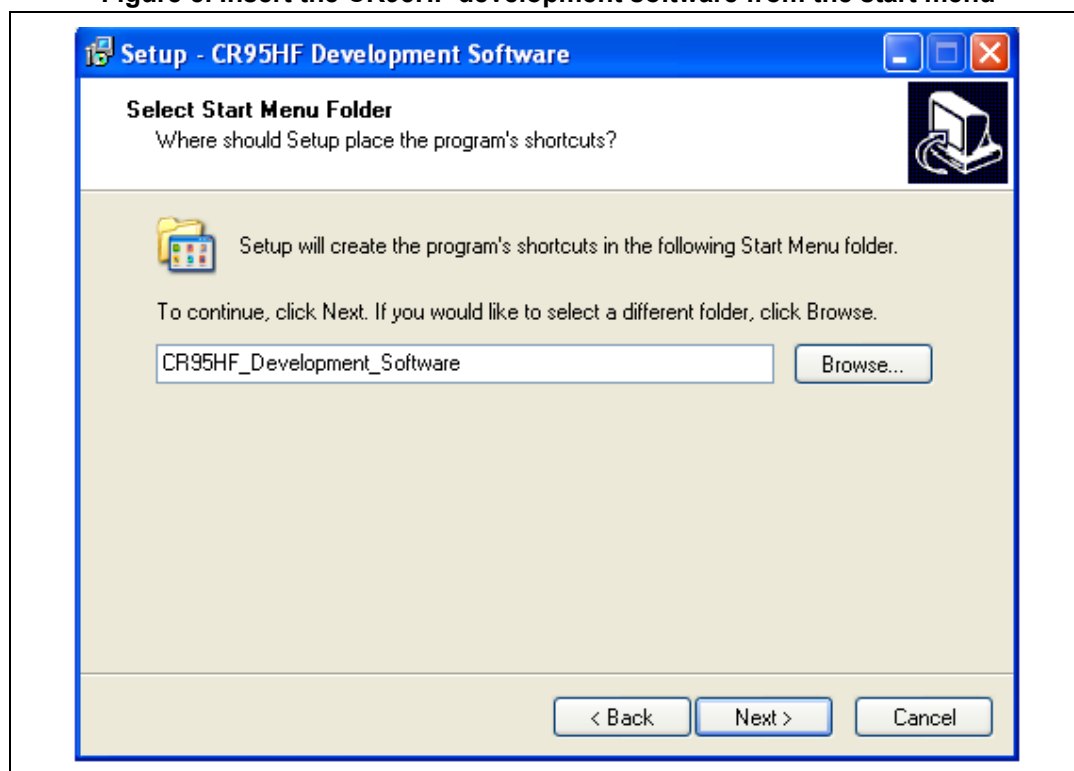


Figure 6. Create desktop or quick launch icons (optional)

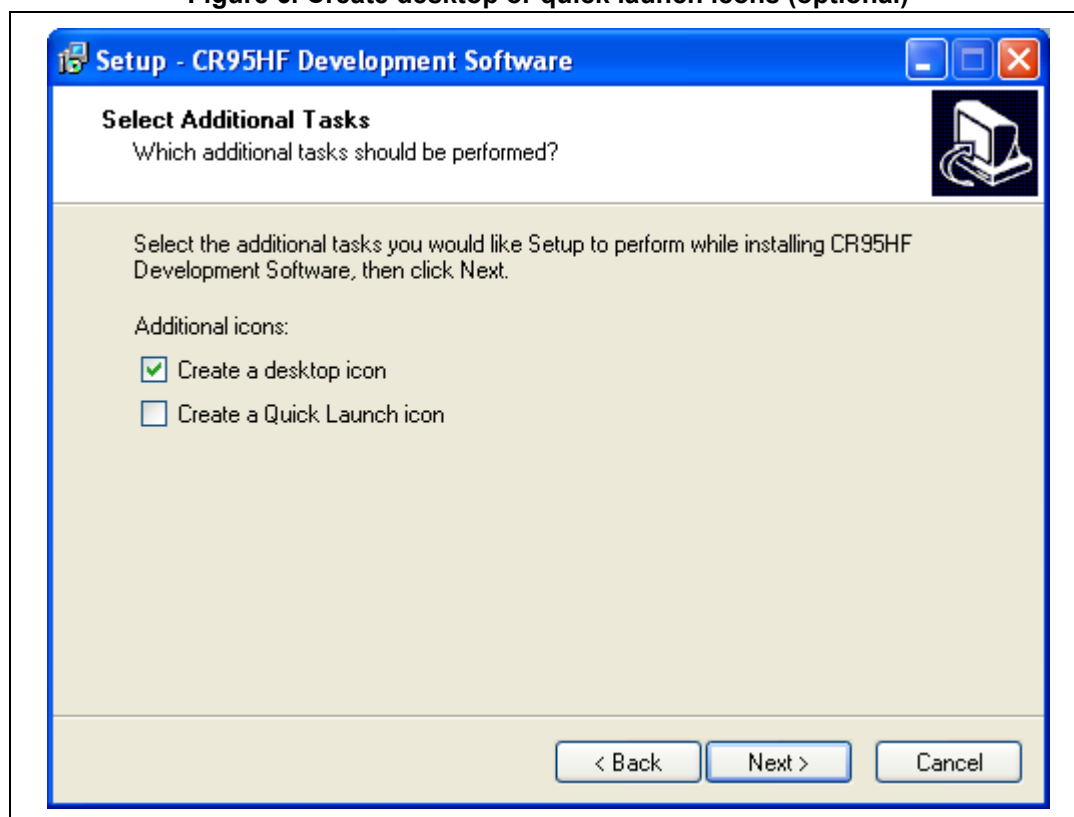


Figure 7. Install the CR95HF development software on your computer

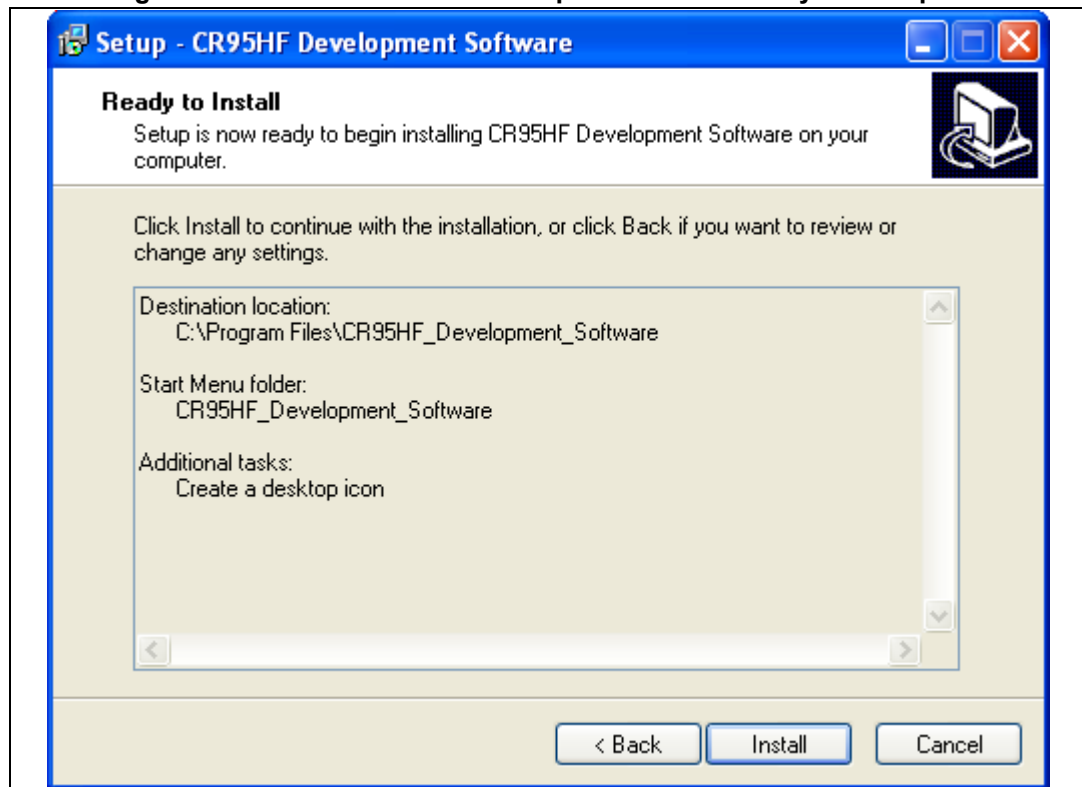


Figure 8. Install the CR95HFdll.dll

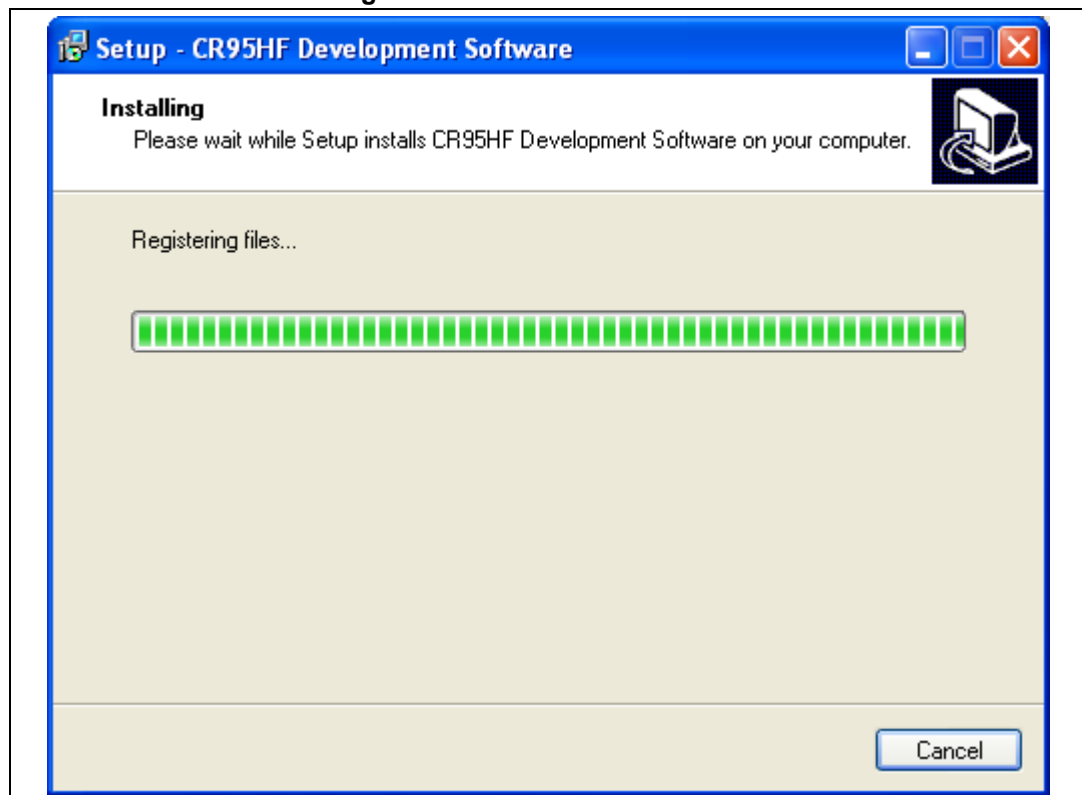


Figure 9. Read the CR95HF development software README

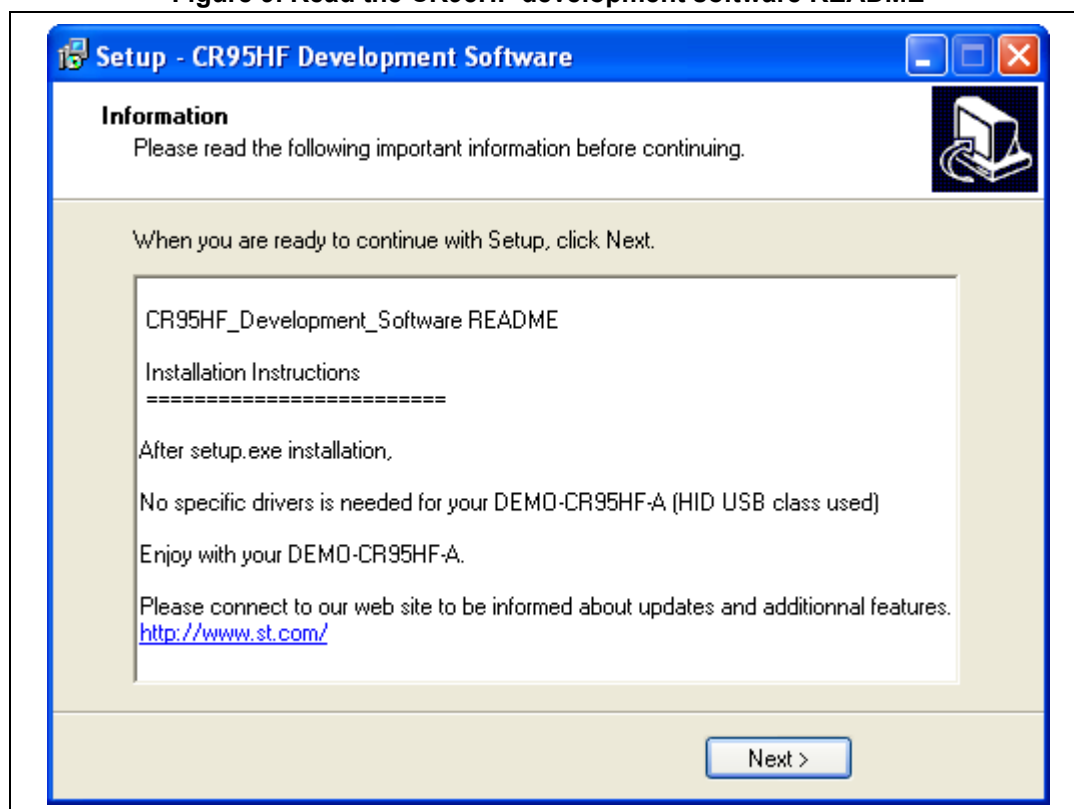


Figure 10. Launch the CR95HF development software



2 Using the CR95HF development software

2.1 Launching the CR95HF development software

Before launching the CR95HF development software, make sure that the DEMO-CR95HF-A board is connected to the USB port of your computer.

The on-board LED blinks to indicate that the board works properly.

When the CR95HF development software is launched, a DEMO-CR95HF-A detection process begins (see [Figure 11](#) and [Figure 12](#)) to check:

- the revision of the DLL installed on your computer
- the revision of the STM32 MCU firmware installed on your DEMO-CR95HF-A board
- the CR95HF identification number (IDN)

The objective of these checks is to verify that the DLL installed on your PC is up-to-date, and that your DEMO-CR95HF-A is ready to be used with the CR95HF development software.

If a problem occurs during the detection, the message shown in [Figure 13](#) is displayed.

Figure 11. DEMO-CR95HF-A detection message 1/3



Figure 12. DEMO-CR95HF-A detection message 2/3



Figure 13. DEMO-CR95HF-A detection message 3/3



2.2 Main menu


If the DLL has been installed correctly and the DEMO-CR95HF-A is connected to your PC USB port, the main menu is displayed to indicate that the software is running (see [Figure 14](#)).

Note: The software release number is shown at the bottom of the menu window.

This menu allows the user to access several sub-menus:

- **CR95HF commands** (see [Section 2.3](#))
- **ISO15693** mode (see [Section 2.4](#))
- **ISO14443-B** mode (see [Section 2.5](#))
- **ISO14443-A** mode (see [Section 2.6](#))
- **ISO18092** mode (see [Section 2.7](#))
- **Tools** menu (see [Section 2.8](#))
- **Help** menu (see [Section 2.9](#))


Figure 14. Main menu

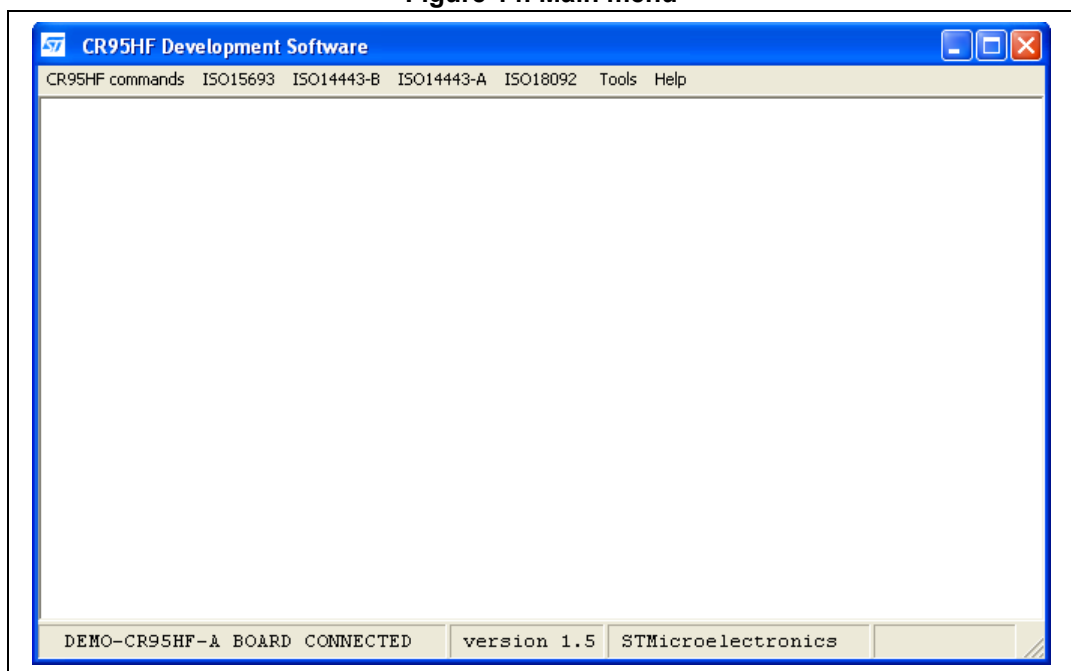

2.3 CR95HF commands menu

1. Select **CR95HF commands** from the main menu to communicate with the CR95HF embedded on your board and use all the commands and parameters described in the CR95HF datasheet (see [Figure 15](#)).

Figure 15. Selecting the CR95HF commands menu

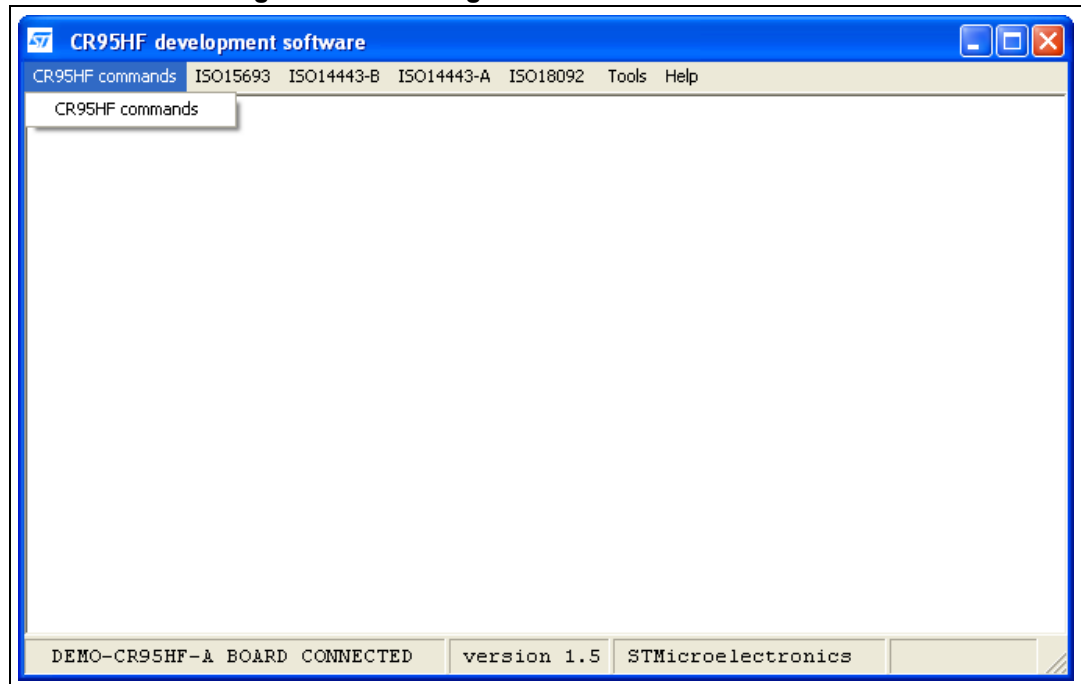

2. Select a command from the list (see [Figure 16](#)). The corresponding CR95HF command is sent to the DEMO-CR95HF-A. The selected parameters together with the board answer are displayed in the log window located at the bottom of the CR95HF user interface window.


Two buttons are available from this menu:

- **Save Log** can be used to save the log content.
- **Clear Log** clears the log window.

The following commands can be sent through the CR95HF user interface:

- 01: IDN
- 02: Protocol Select
- 04: SendRecv
- 07: Idle
- 08: RdReg
- 0A: Set UART baud rate
- 55: Echo

Figure 16. CR95HF user interface menu

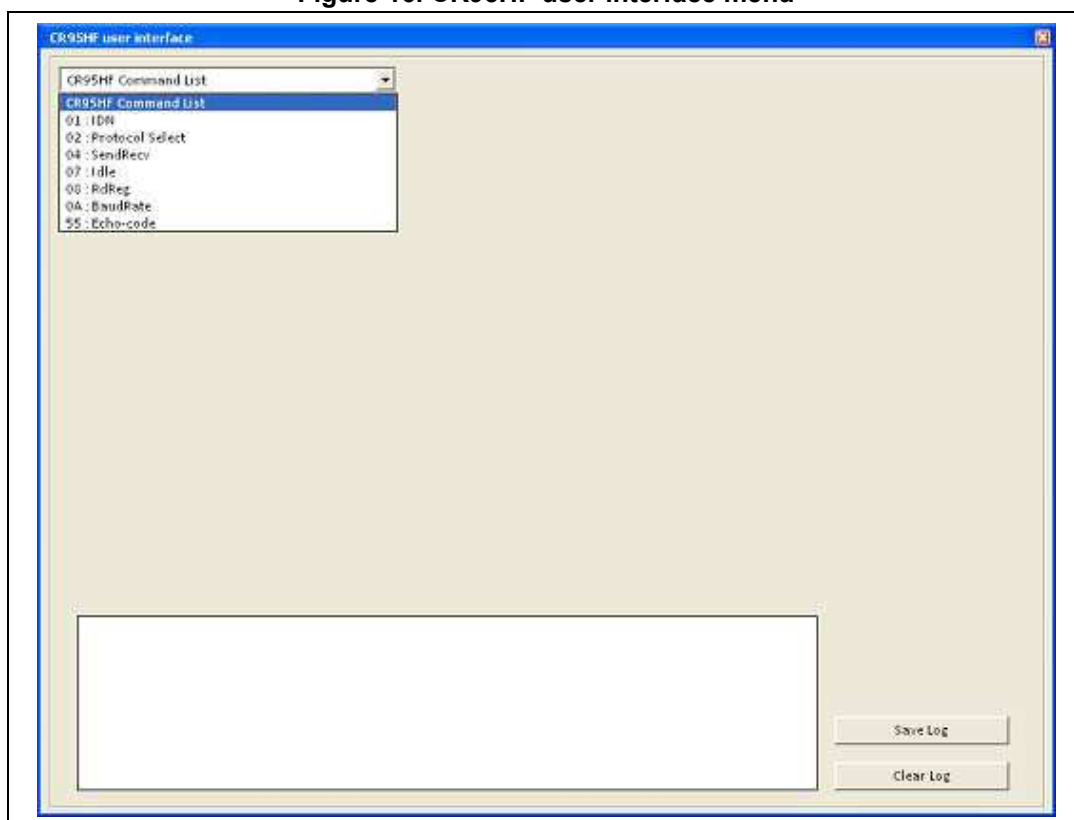

2.3.1 01: IDN

Click **01: IDN** to request short information about the CR95HF and its firmware version (see [Figure 17](#)).

Figure 17. IDN window

command code 01 : IDN

Send frame

01 00

length of data

command code

Request : 0100

Answer : 000F4E4643204653324A41535431004298

00 : result code = OK

0F : length of data (15)

NFC FS2JAST1

2.3.2 02: Protocol Select

Click **02: Protocol Select** to select the communication protocol to be used between the CR95HF and the tags, or to switch the RF field off (see [Figure 18](#)):

- Click **01: ISO15693** to select and configure the ISO15693 communication protocol (see [Figure 20](#)).
- Click **02: ISO14443-A** to select and configure the ISO-14443-A communication protocol (see [Figure 21](#)).
- Click **03: ISO14443-B** to select and configure the ISO-14443-B communication protocol (see [Figure 22](#)).
- Click on **04: ISO18092** to select and configure the ISO-18092 communication protocol (see [Figure 23](#)).
- Click **00: Field OFF** to send a Field OFF command that turns the RF field off (see [Figure 19](#)).

Figure 18. Protocol Select window

Figure 19. Field OFF window

Figure 20. ISO15693 window

command code 02 : Protocol Select

Reader protocol code

☐ 00 : Field OFF

☒ 01 : ISO15693

☐ 02 : ISO14443-A

☐ 03 : ISO14443-B

☐ 04 : ISO18092

ISO15693 reader byte 0 configuration

7	0	RFU
6	0	
5	0	00 : 26k
4	0	
3	1	1 : wait for sof
2	1	1 : 10% modulation
1	0	0 : Single Subcarrier
0	1	1 : Append CRC

byte 0 = 0D

send frame

02 02 01 0D

Request : 0202010D

Answer : 0000

00 : result code = OK

00 : length of data (0)

Figure 21. ISO14443-A window

command code 02 : Protocol Select

Reader protocol code

☐ 00 : Field OFF

☐ 01 : ISO15693

☒ 02 : ISO14443-A

☐ 03 : ISO14443-B

☐ 04 : ISO18092

ISO14443-A reader byte 0 configuration

7	0	00 : 106k
6	0	
5	0	00 : 106k
4	0	
3	0	RFU
2	0	
1	0	RFU
0	0	

byte 0 = 00

ISO14443-A reader byte 1 & 2 configuration

☒ AFDT optional bytes 1 & 2

byte 1 = 01 byte 2 = 80

send frame

02 04 02 00 01 80

Request : 020402000180

Answer : 0000

00 : result code = OK

00 : length of data (0)

Figure 22. ISO14443-B window

command code 02 : Protocol Select

Reader protocol code

- ☐ 00 : Field OFF
- ☐ 01 : ISO15693
- ☐ 02 : ISO14443-A
- ☒ 03 : ISO14443-B
- ☐ 04 : ISO18092

ISO14443-B reader byte 0 configuration

7	0	}	00 : 106k
6	0		
5	0	}	00 : 106k
4	0		
3	0	}	RFU
2	0		
1	0		
0	1		1 : Append CRC

byte 0 = 01

ISO14443-B reader byte 1 & 2 configuration

☒ AFDT optional bytes 1 & 2

byte 1 = 01 byte 2 = 80

Request : 02 04 03 01 01 80

Answer :

0000

00 : result code = OK

00 : length of data (0)

Figure 23. ISO18092 window

command code 02 : Protocol Select

Reader protocol code

- ☐ 00 : Field OFF
- ☐ 01 : ISO15693
- ☐ 02 : ISO14443-A
- ☐ 03 : ISO14443-B
- ☒ 04 : ISO18092

ISO18092 reader byte 0 configuration

7	0	}	01 : 212k
6	1		
5	0	}	01 : 212k
4	1		
3	0	}	RFU
2	0		
1	0		
0	1		1 : Append CRC

byte 0 = 51

ISO18092 reader byte 1 configuration

7	0	}	RFU
6	0		
5	0	}	1 : search for the reply
4	1		
3	0	}	0 : 1 slot
2	0		
1	0		
0	0		

☒ check to send Slot Counter parameter (byte 1) byte 1 = 10

ISO18092 reader bytes 2 & 3 configuration

☒ AFDT optional bytes 2 & 3 = 05 00

Request : 02 05 04 51 10 05 00

Answer :

0000


00 : result code = OK

00 : length of data (0)

2.3.3 04: SendRecv

Click **04: SendRecv** to send data and receive the tag response using the previously selected protocol (see [Figure 24](#) for an example).

Figure 24. ISO15693 Inventory (260100) transmitted using a SendRecv request

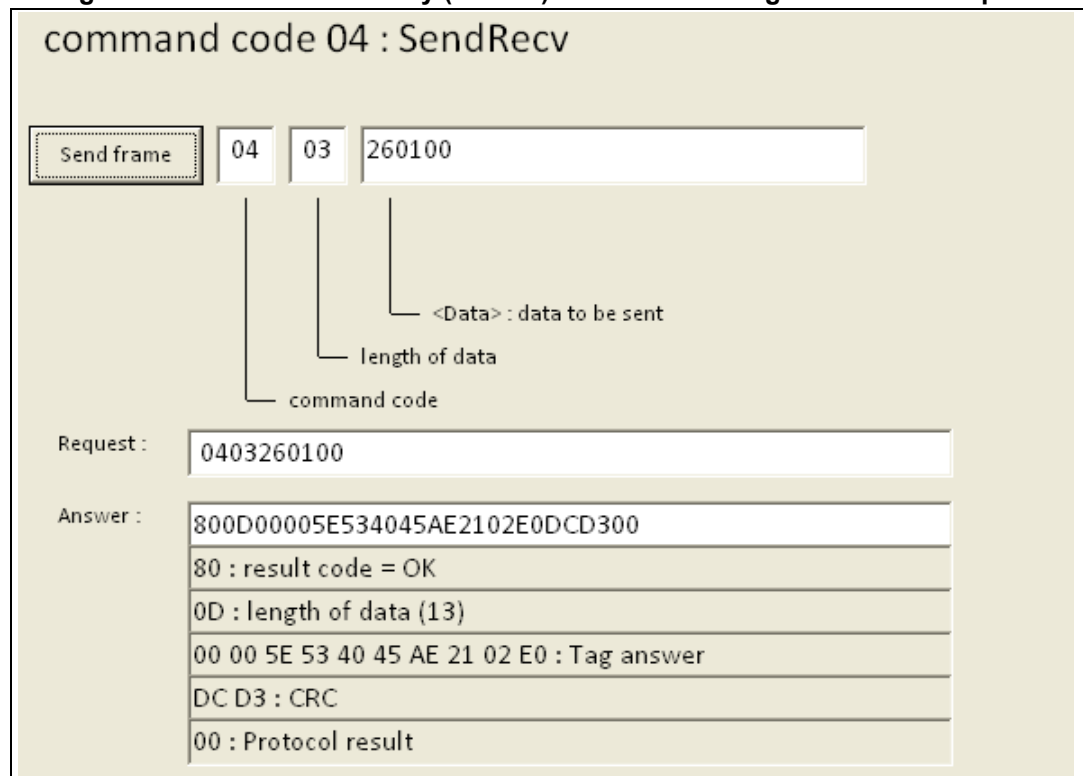

2.3.4 07: Idle

Click **07: Idle** to switch the CR95HF to Tag Detection or Hibernate mode and specify the condition to exit this mode (see [Figure 25](#)).

Figure 25. Idle window

command code 07 : Idle

Send frame

07 0E 08 04 00 04 00 18 00 00 00 00 00 00 00 00

length of data
command code

Request :

Answer :

Idle frame examples (see datasheet or AN3433)

- ☒ from Ready state to Hibernate state (wake up event : IRQ in)
- ☐ from Ready state to Sleep state (wake up event : IRQ in pin)
- ☐ from Ready state to Sleep state (wake up event : NSS pin)
- ☐ from Ready state to Sleep state, back to Ready state after time out (7 sec)
- ☐ wake up by Tag Detector or IRQ in pin
- ☐ basic IDLE command used during the Tag Detection Calibration process (cf datasheet or AN3433 for DacDataH values)

Echo

Negative pulse on IRQ in

Negative Pulse on SPI NSS

EnterCtrlL

EnterCtrlH

WUCtrlL

WUCtrlH

LeaveCtrlL

LeaveCtrlH

<WUFlags>

<WUPeriod>

<OscStart>

<DacStart>

<DacDataL>

<DacDataH>

<SwingsCnt>

<MaxSleep>

2.3.5 08: RdReg

Click **08: RdReg** to read the Wakeup register (see [Figure 26](#)).

Figure 26. RdReg window

command code 08 : RdReg

Send frame

08 03 62 01 00

length of data
command code

Register Address

Register size

ST Reserved

Request :

Answer :

Select register

- ☒ 0x62 : Wake-up event register
 - > answer = 01 : wake-up by timeout
 - > answer = 02 : wake-up by tag detect
- ☐ 0x69 : ARC_B register
 - > answer = XY :
 - where : X = Depth
 - where : Y = Gain

2.3.6 0A: Set UART baud rate

Click **0A: Set UART baud rate** to configure the UART data transfer (see [Figure 27](#)).

Note: The DEMO-CR95HF-A is delivered in SPI version. Contact your nearest ST sales offices to switch it to UART mode.

Figure 27. Set UART baud rate window

Send frame

0903680001

Index

Flag increment address after write command

Analog Register Configuration address index

length of data

command code

Request :

Answer :

Write register command

☒ Set analog register index to 0x01 (ARC_B)

☐ Update ARC_B value (with value = XY)

where : X = Modulation Depth

1 = 10% 4 = 30% D = 95%

2 = 17% 5 = 33%

3 = 25% 6 = 36%

where : Y = Receiver Gain

0 = 34 dB 3 = 27 dB F = 8 dB

1 = 32 dB 7 = 20 dB

☐ Set HF2RF (enable Reader mode)

☐ Reset HF2RF (disable Reader mode)

☐ Set TimerW value 0x50-0x60 (ISO14443-A)

☐ Enable the AutoDetect filter (ISO18092)

☐ QJD RF Enable

2.3.7 55: Echo

Click **05: Echo** to perform a serial interface echo (see [Figure 28](#)).

Figure 28. Echo window

command code 55 : Echo-code

Send frame

55

command code

Request :

55


Answer :

5500

2.4 ISO15693 menu

1. Select **ISO15693** from the main menu to use the DEMO-CR95HF-A as an ISO15693 reader. You can then choose between long range contactless memories and Dual Interface devices (see [Figure 29](#)).

Figure 29. ISO15693 menu

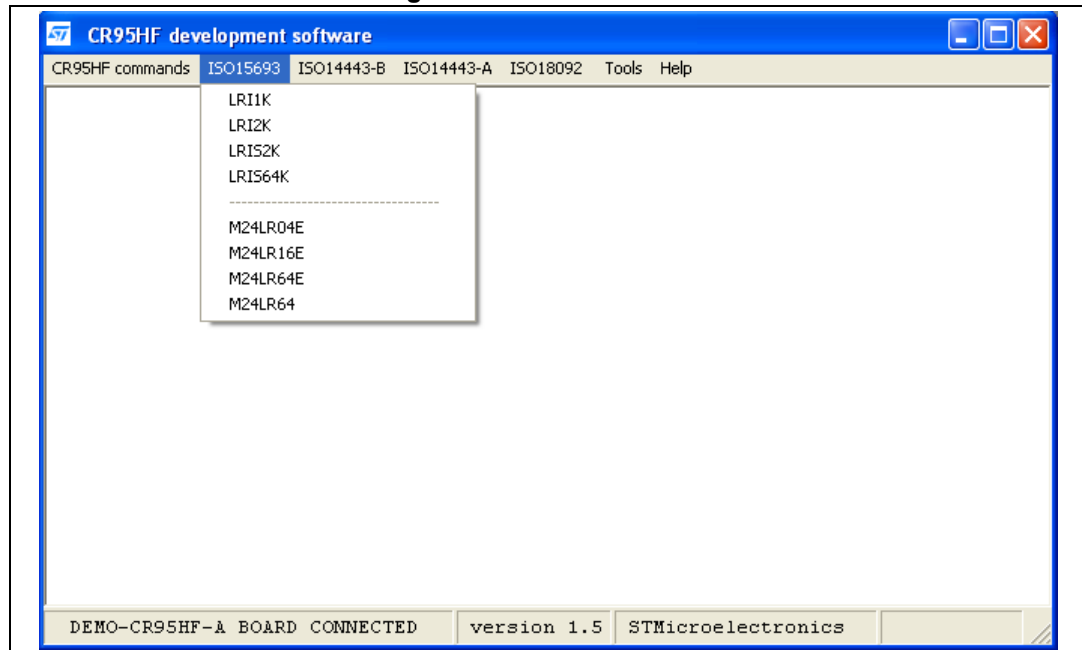

2. Select a device from the list (see [Figure 30](#) for an example). The board is then automatically configured as an ISO15693 reader, and the CR95HF can send/receive ISO15693 frames to/from the tags using the SendRecv command.

ISO15693 communications are configured as follows:

- 10% high data rate
- One subcarrier

The ISO15693 configuration is displayed in the log window.

The upper part of the menu shows buttons which allow to send ISO15693 requests to a tag through the DEMO-CR95HF-A antenna. The main available requests are:

- Inventory
- Select
- Stay Quiet
- Reset to ready
- Get system info
- Initiate
- Inventory initiated
- Fast initiate
- Fast Inventory initiated

Refer to the CR95HF datasheet for the full list of ISO15693 commands.

By default, the ISO15693 requests are sent in Non-selected/Non-addressed mode, and the requests are decoded by all the tags present in the RF field.

To switch to Addressed mode, follow the steps below:


- a) Send an Inventory request to retrieve the tag UID.
- b) Click on the UID displayed in the **INVENTORY response** window to automatically copy the UID into the **Tag information** text box.
- c) Check **Address Flag** to activate the Addressed mode for the coming requests.

The following sequence is required to switch to Selected mode:

- a) Send a Select request in Addressed mode (steps a to c above).
- b) Uncheck **Address Flag**.
- c) Check **Select Flag**.

All the coming requests will be sent to the previously selected tag.

Figure 30. Example of ISO15693 user interface for M24LR64

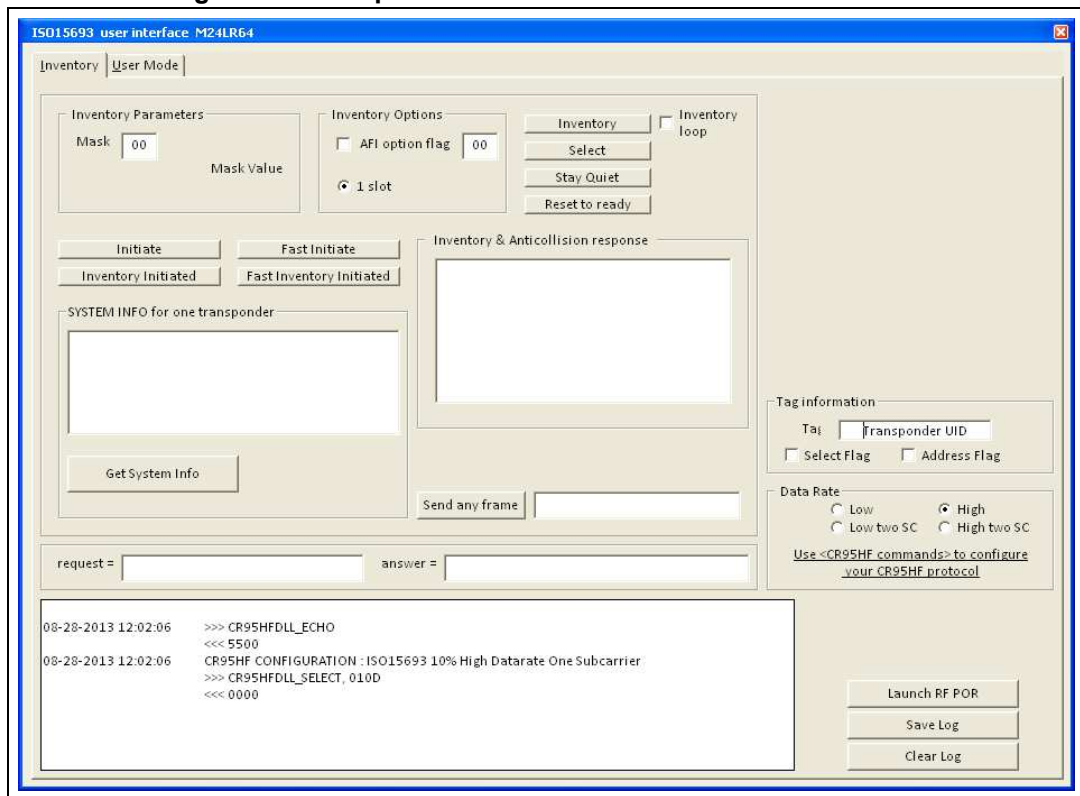

- Click **User Mode** from the toolbar of the device ISO15693 user interface to display the ISO15693 requests that can be sent in User mode (see [Figure 31](#)). The main requests are:


- Read single and multiple block(s)
- Fast read single and multiple block(s)

The DEMO-CR95HF-A is automatically configured in Fast mode, and put back in normal mode when the request is complete.

Other requests are available (DSFID, AFI, ..). Refer to the device datasheet for the full list of ISO15693 requests available for a given product.

Note: The tag answer to a read request is displayed in the right part of the window.


Figure 31. Selecting User Mode from ISO15693 user interface (M24LR64)

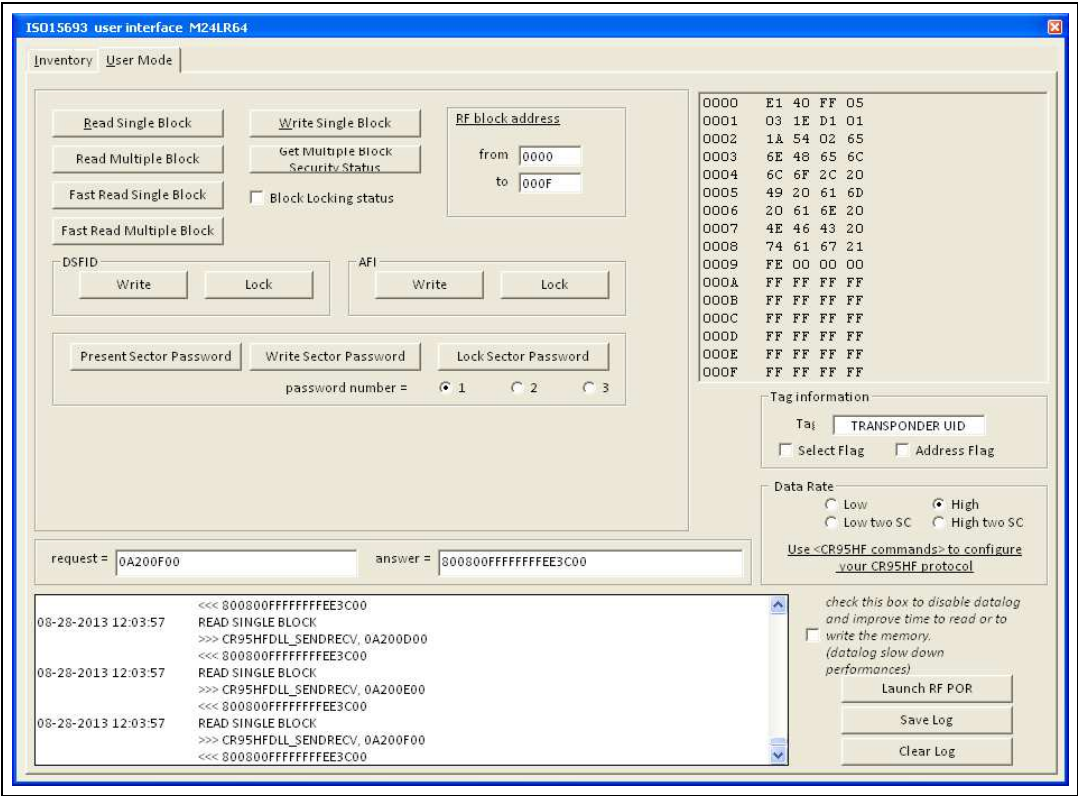

2.5 ISO14443-B menu

1. Select **ISO14443-B** from the main menu to use the DEMO-CR95HF-A as an ISO14443-B reader. You can then choose between short range contactless memories and Dual Interface devices (see [Figure 32](#)).

Figure 32. ISO14443-B menu

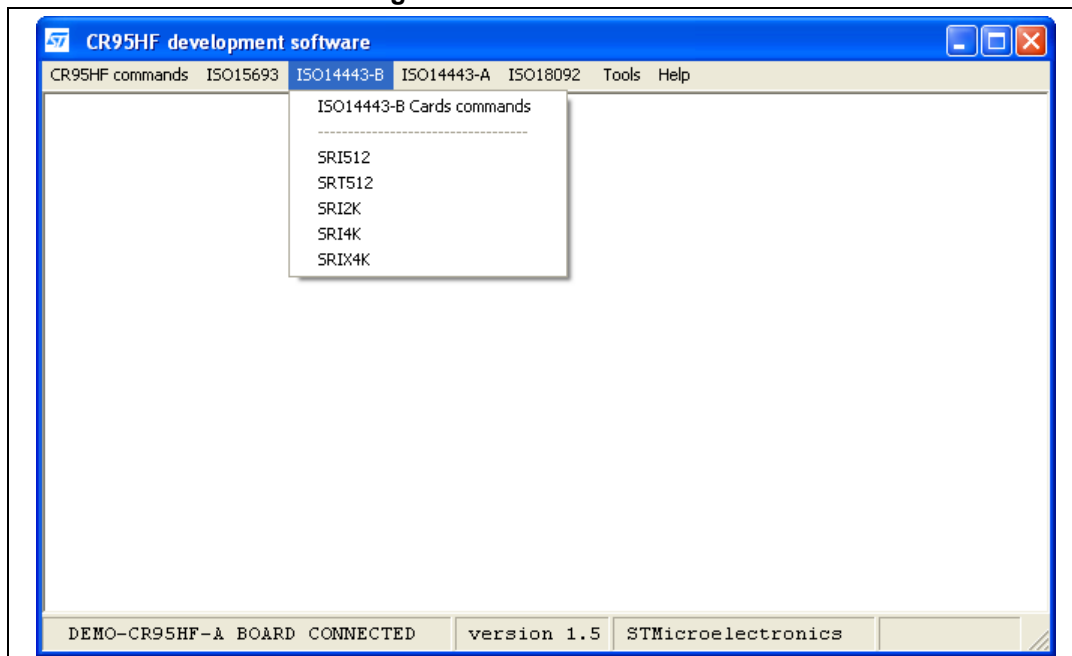

2. Select a device from the list (see [Figure 33](#) and [Figure 34](#) for an example). This automatically configures the board as an ISO14443-B reader and displays all the ISO14443-B requests.
ISO14443-B communications are configured as follows:
 - 106 kbits/s data rate for both transmission and reception
 - CRC appendedThe ISO14443-B configuration is displayed in the log window.
The upper part of the window contains buttons allowing to send ISO14443-B requests to tags through the DEMO-CR95HF-A antenna.
Refer to the device datasheet for the full list of ISO14443-B requests available for a given product.

Figure 33. Example of ISO14443-B user interface

ISO14443-B user interface ISO14443-B

ISO14443-B user interface :

REQB 00 0 0 0
WUPB afi N Loop ☐

Answer :
first byte :
PUPi :
application data :
protocol info :
CRC :

ATTRIB PUPi 00000000
Authorized response time 00
Max frame size 07
ISO14443 compliant 01
CID(8bits) card identifier 00

Answer :
MBU(4 bits) CID(4 bits) :
CRC :

Send any frame request = answer =

08-28-2013 12:04:52 >>> CR95HFDLL_ECHO
<<< 5500
08-28-2013 12:04:53 CR95HF CONFIGURATION : ISO14443-B protocol
>>> CR95HFDLL_SELECT, 03010180
<<< 0000
08-28-2013 12:04:53 CR95HF CONFIGURATION : INCREASE DEMOD GAIN
>>> CR95HFDLL_STCMD, 01 090468010130
<<< 0000

Launch RF POR
Save Log
Clear Log

Figure 34. Example of ISO14443-B user interface for SRIxxx

ISO14443-B user interface SRI2K

ISO14443-B Cards user interface (SRIxxx) :

Reset to Inventory
Initiate
Select(Chip_Id) Chip Id = 00
Slot Marker (SN) SN = 0 0 0 0
Pcall16
Completion
Get UID UID =

Read Single Block
Read system area @FF
Write Single Block
RF block address
from 00
to 3F

ISO14443-B Anticollision
Loop ☐

0:	3:	6:	9:	12:	15:
1:	4:	7:	10:	13:	
2:	5:	8:	11:	14:	

Send any frame request = answer =


08-28-2013 12:06:52 >>> CR95HFDLL_ECHO
<<< 5500
08-28-2013 12:06:52 CR95HF CONFIGURATION : ISO14443-B protocol
>>> CR95HFDLL_SELECT, 03010180
<<< 0000
08-28-2013 12:06:53 CR95HF CONFIGURATION : INCREASE DEMOD GAIN
>>> CR95HFDLL_STCMD, 01 090468010130
<<< 0000

Launch RF POR
Save Log
Clear Log

2.6 ISO14443-A menu


1. Select ISO14443-A from the main menu to use the DEMO-CR95HF-A as an ISO14443-A reader. You can then choose between standard ISO14443-A and TOPAZ devices (see [Figure 35](#)).

Figure 35. ISO14443-A menu

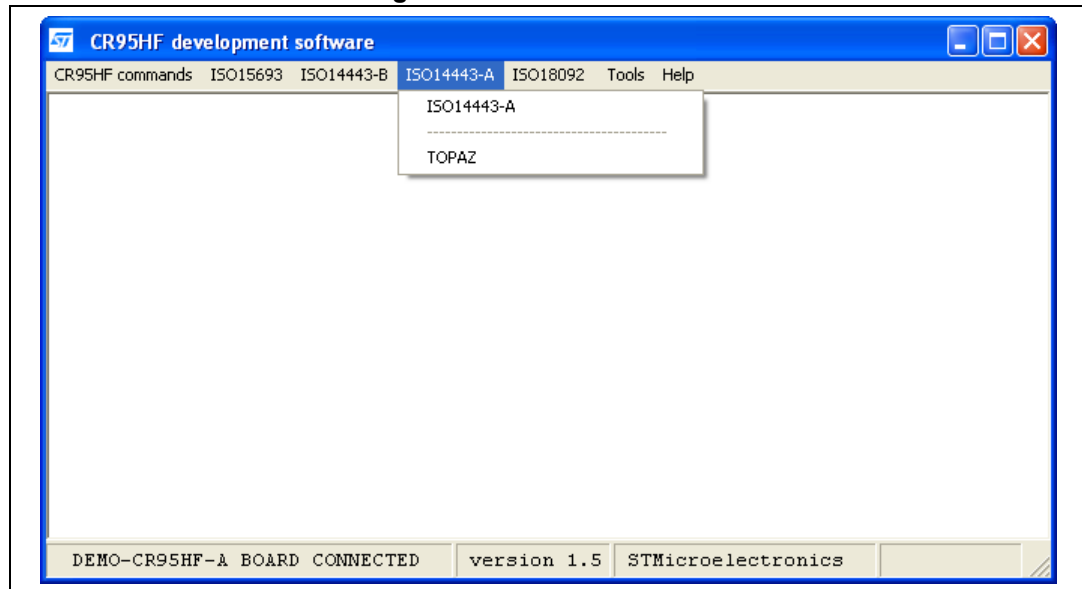

2. Select ISO14443-A from the list (see [Figure 36](#) for an example). This automatically configures the board as an ISO14443-A reader and displays all the ISO14443-A requests.

Figure 36. ISO14443-A selected from the list

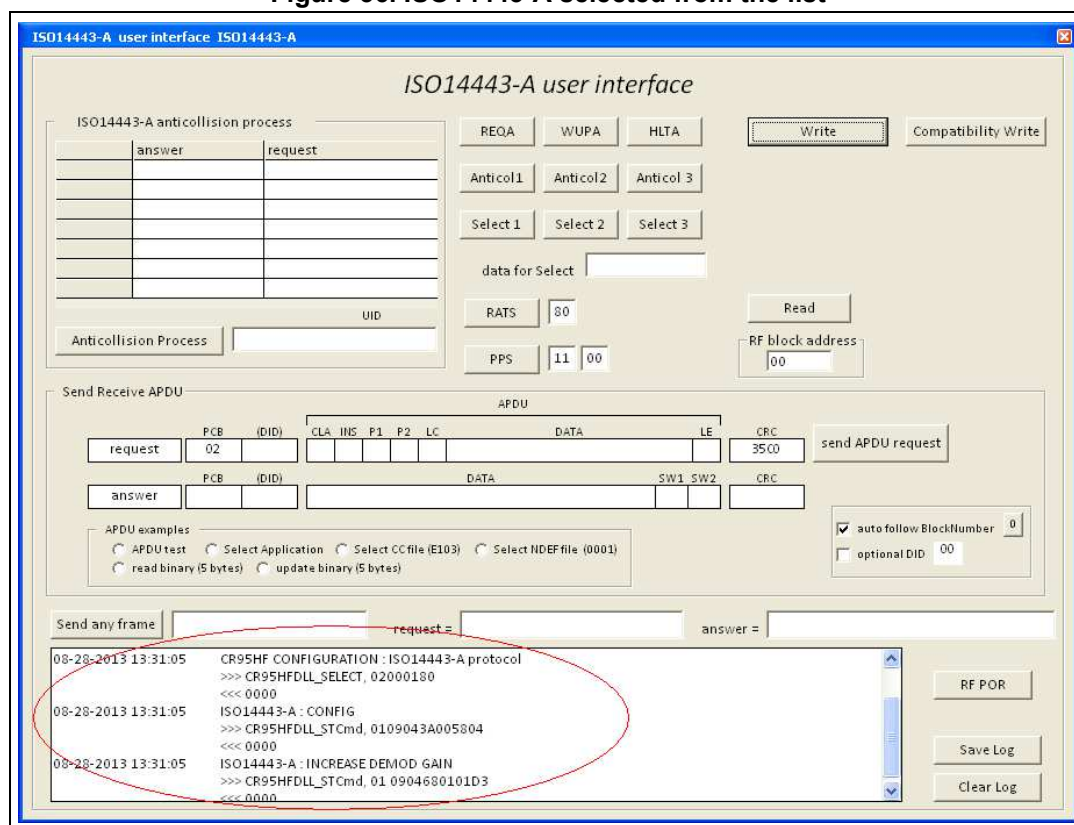

The ISO14443-A configuration is displayed in the log window as shown in [Figure 36](#).

The upper part of the window contains buttons allowing to send ISO14443-A requests to tags through the DEMO-CR95HF-A board.

Refer to the device datasheet for the full list of ISO14443-A requests available for a given product.

Anticollision process will try to communicate with your Tag and try to select it. This automatic process is only for 1 tag.

It sends successively:

- ReqA
- Anticol1
- Select1
- Anticol2
- Select2
- Anticol3
- Select3

The process will be stopped as soon as an error occurs or if the anticollision process is finished (4 bytes or 7 bytes or 10 bytes UID).

Other commands can be sent such as:


- RATS
- PPS
- READ
- WRITE

Send Receive APDU can be used to send APDU requests.

2.7 ISO18092 menu

1. Select ISO18092 from the main menu to use the DEMO-CR95HF-A as an ISO18092 reader (see [Figure 37](#)).

Figure 37. ISO18092 menu

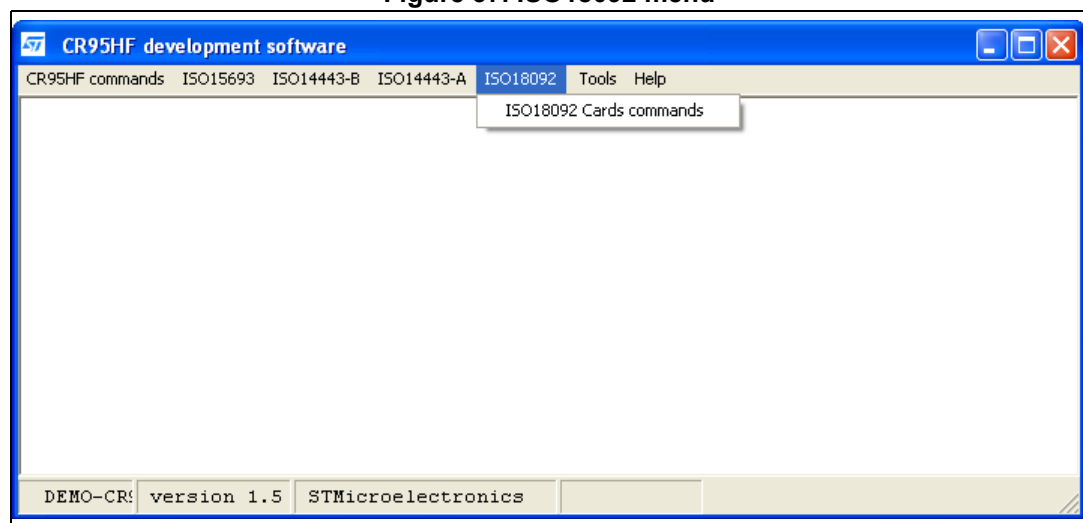

2. Select ISO18092 Cards commands from the list. This automatically configures the board as an ISO18092 reader and displays all the ISO18092 requests.

The ISO18092 configuration is displayed in the log window as shown in [Figure 38](#).

Figure 38. ISO18092 log window

ISO18092 user interface ISO18092

ISO18092 Cards user interface :

POLLING command 00 FF FF 00 00 : Max number of slots = 1

Time slot
Request code
System code
Command code

00 : no request
01 : System Code request
02 : Performance Parameter request

Answer : 01 0127006ECD4C3B93 00F0000002060300
* Click to use this Manufacture ID

READ command 06 0127006ECD4C3B93 01 0900 01 8000

Answer : 07 0127006ECD4C3B93 0000 01 11223344556677889900AABBCCDDEEFF

WRITE command 08 0127006ECD4C3B93 01 0900 01 8000 11223344556677889900AABBCCDDEEFF

Answer : 09 0127006ECD4C3B93 0000

Loop ☐

Send any frame

request = 060127006ECD4C3B93010900018000 answer = 801D070127006ECD4C3B9300000111223344556677889900AABBCCDDEEFF

07-26-2013 14:07:41 WRITE
>>> CR95HFDLL_SENDRECV,
080127006ECD4C3B9301090001800011223344556677889900AABBCCDDEEFF
<<< 800C090127006ECD4C3B93000000

07-26-2013 14:07:42 READ
>>> CR95HFDLL_SENDRECV, 060127006ECD4C3B93010900018000
<<< 801D070127006ECD4C3B9300000111223344556677889900AABBCCDDEEFF00

Launch RF POR
Save Log
Clear Log

Polling command can be done to communicate with an ISO18092 card. The response of the tag will be displayed in several fields.

ManufactureID is displayed in the second field. Click on this field to fill the Read & Write commands with this mandatory field.


Read command and Write command are also available.

2.8 Tools menu

Select the **Tools** menu to launch one of the following tools (see [Figure 39](#)):

- **DEMO-CR95HF-A tool box** (see [Section 2.8.1: DEMO-CR95HF-A toolbox](#))
This menu allows the user to send requests to the DEMO-CR95HF-A board.
- **Tag Detection tool** (see [Section 2.8.2: Tag Detection tool](#))
This menu can be used to launch a DEMO-CR95HF-A calibration and a CR95HF Tag Detection.
- **Auto Detect tool** (see [Section 2.8.3: Auto detection tool](#))
This menu allows to launch successive anticollision processes on several RFID technologies in order to detect tags
- **Script tool** (see [Section 2.8.4: Script tool](#))
This menu allows to transmit and execute a sequence of CR95HF requests.

Figure 39. Tools menu

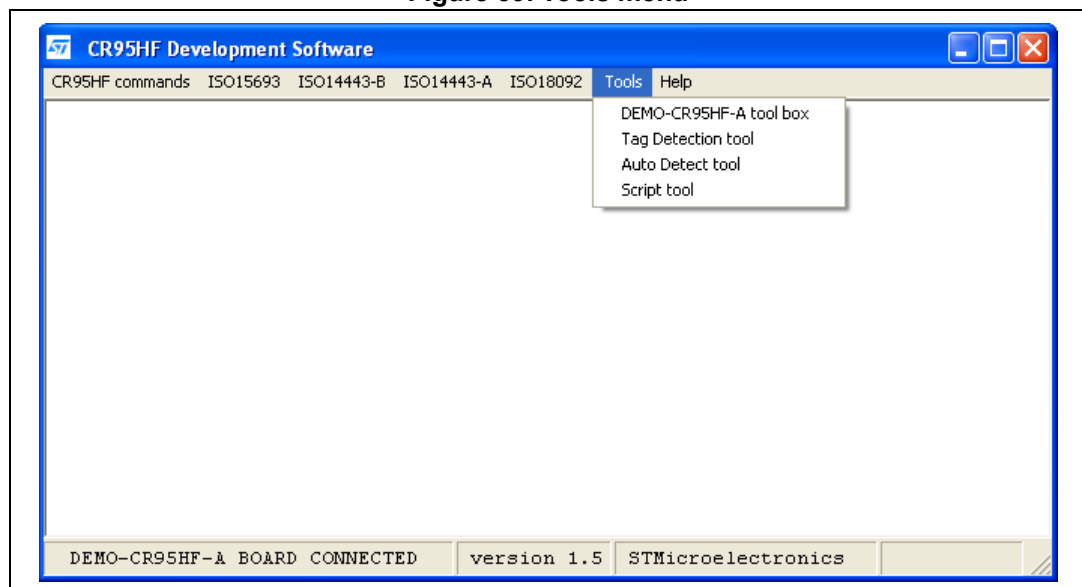

2.8.1 DEMO-CR95HF-A toolbox

The DEMO-CR95HF-A toolbox allows to send the following requests to the DEMO-CR95HF-A board (see [Figure 40](#)):

- **Get MCU revision:** reads the revision of the STM32 microcontroller firmware.
- **Get DLL revision:** reads the revision of the DLL installed on your PC.
- **IDN:** sends an IDN command to the CR95HF and receives the answer.
- **Field Off:** turns the RF field off.
- **Echo:** sends an Echo command to the CR95HF and receives the answer.
- **Reset SPI:** resets SPI communications between the STM32 MCU and the CR95HF.
- **Negative pulse on IRQ in:** applies a negative pulse on the CR95HF IRQ input.
- **Negative Pulse on SPI NSS:** applies a negative pulse on CR95HF NSS pin.
- **Polling + reading:** puts the CR95HF in polling & reading mode.
- **Get interface pin state:** detects the bus configuration of the DEMO-CR95HF-A board.
- **Change Modulation depth and Receiver Gain:** modifies the setting for ISO14443-A.
- **Change TimerW value:** modifies the setting for ISO14443-A.

Figure 40. DEMO-CR95HF-A toolbox

The screenshot shows the 'DEMO-CR95HF-A toolbox' window. It features a grid of buttons for various functions: 'Get MCU revision', 'Get DLL revision', 'Echo', 'Field Off', 'Get Hardware version', 'DEMO-CR95HF-A USB Connect', 'DEMO-CR95HF-A USB Handle Check', 'IDN', 'Reset SPI', 'Polling + reading', 'Get interface pin state', 'Change Modulation depth* and Receiver Gain* for ISO14443-A', and 'Change TimerW* value for ISO14443-A'. Below these buttons are radio buttons for 'UART bus', 'SPI bus', and 'TWI'. At the bottom, there is a large text area and two buttons: 'Save Log' and 'Clear Log'. A note at the bottom states: '* These values will be applied to all ISO14443-A protocol select commands'.

2.8.2 Tag Detection tool

Two commands are available (see [Figure 41](#)):

- **Calibration**

Clicking the **Calibration** button performs a DEMO-CR95HF-A calibration to determine the DacDataL/DacDataH parameters that will be used in Tag Detection mode. The calibration sequence is the following:

- Send an Idle command to the CR95HF with DacDataL fixed to 0 and DacDataH set to its maximum value.
- Read the Wakeup register to check whether the CR95HF has entered Wakeup mode on a tag detection event. Otherwise, a new Idle command is sent with a lower DacDataH value. These steps are repeated until a tag is detected.

The DacDataL/DacDataH parameters that will be used for tag detection are:

$$\text{DacDataL}_{\text{Tag detection}} = \text{DacDataL}_{\text{Calibration}} - 2$$

$$\text{DacDataH}_{\text{Tag detection}} = \text{DacDataH}_{\text{Calibration}} + 2, \text{ DacDataH}_{\text{Calibration}} \text{ being the value corresponding to the detection limit.}$$

- **Tag Detection**

The tag detection sequence is performed using the $\text{DacDataL}_{\text{Tag detection}}/\text{DacDataH}_{\text{Tag detection}}$:

- Send an Idle command to put the CR95HF in tag detection state.
- Wait till the CR95HF wakes up: read the Wakeup register to check if the CR95HF has been woken up by a tag detected in the RF field or by timeout.


If a tag is detected in the DEMO-CR95HF-A field, the CR95HF enters Wakeup mode, and an ISO15693/ISO14443-B anti-collision procedure starts to identify the tags present in the field.

To perform one-shot tag detection, uncheck both **Loop** and **Loop until a tag is detected**, before pressing the **Tag Detection** button.

If only **Loop** is checked, the tag detection runs continuously and stops when **Loop** is unchecked.

If only **Loop until a tag is detected** is checked, the tag detection runs continuously and stops when a tag is detected and identified.

Figure 41. Tag detection interface

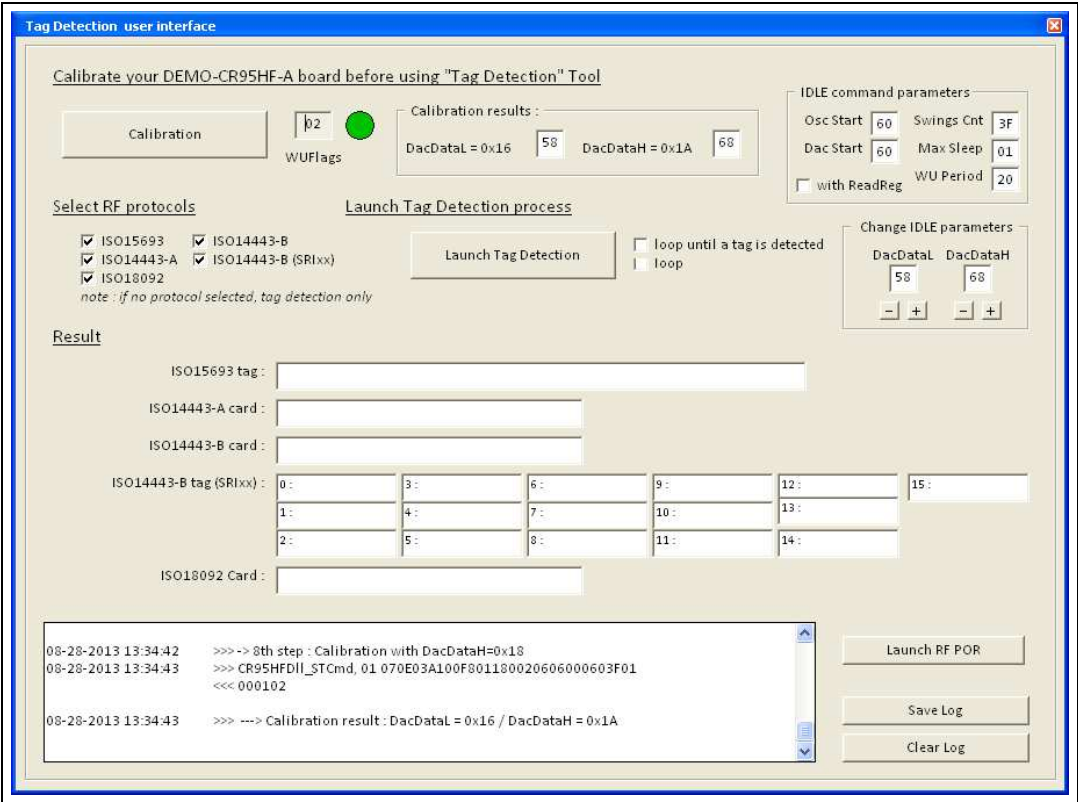

2.8.3 Auto detection tool

The Auto detection tool allows to play a tag hunt on several RFID technologies (see [Figure 42](#)).

Figure 42. Auto Detect tool interface

Auto Detect Tool user interface

Select RF protocols

☒ ISO15693 ☒ ISO14443-A ☒ ISO14443-B ☒ ISO14443-B (SRIxx) ☒ ISO18092

Select at least one RF protocol to be able to launch Auto Detection process

Launch Auto Detection process

☒ no loop
☐ infinite loop on all selected protocols
☐ loop on all selected protocols until a tag is found
☐ loop on all selected protocols until a tag is found, then loop on this tag only

Result

ISO15693 tag :

ISO14443-A card :

ISO14443-B card :

ISO14443-B tag (SRIxx) :

0 :	3 :	6 :	12 :	9 :	15 :
1 :	4 :	7 :	10 :	13 :	
2 :	5 :	8 :	11 :	14 :	

ISO18092 Card :

- **Select RF protocols**
By selecting one or more RF protocol, you can define which kind of tag will be detected and on which protocol the tag hunt will be launched.
- **Launch Auto Detection process**
The Launch Auto Detection button allows to launch a tag hunt on a selected process. This can be done once. The Loop option can be selected.
- **Result**
In case of a Tag detection, the result field will be the field with the Tag identification.


2.8.4 Script tool

The **Script** tool allows playing a script containing a sequence of CR95HF commands (see [Figure 43](#)). The following functions are available:

- **Save Script** saves the script in a text file.
- **Load Script** loads a script file
- **Launch Script** runs the script. The script is executed until an error occurs. Read the log to identify the cause of the error and correct your script. This can be due to a syntax error. Refer to the Script Help to correct it.

The Script Help (see [Section 2.9: Help menu](#)) describes the syntax of all the commands that can be sent to the DEMO-CR95HF-A.

Figure 43. Script tool interface

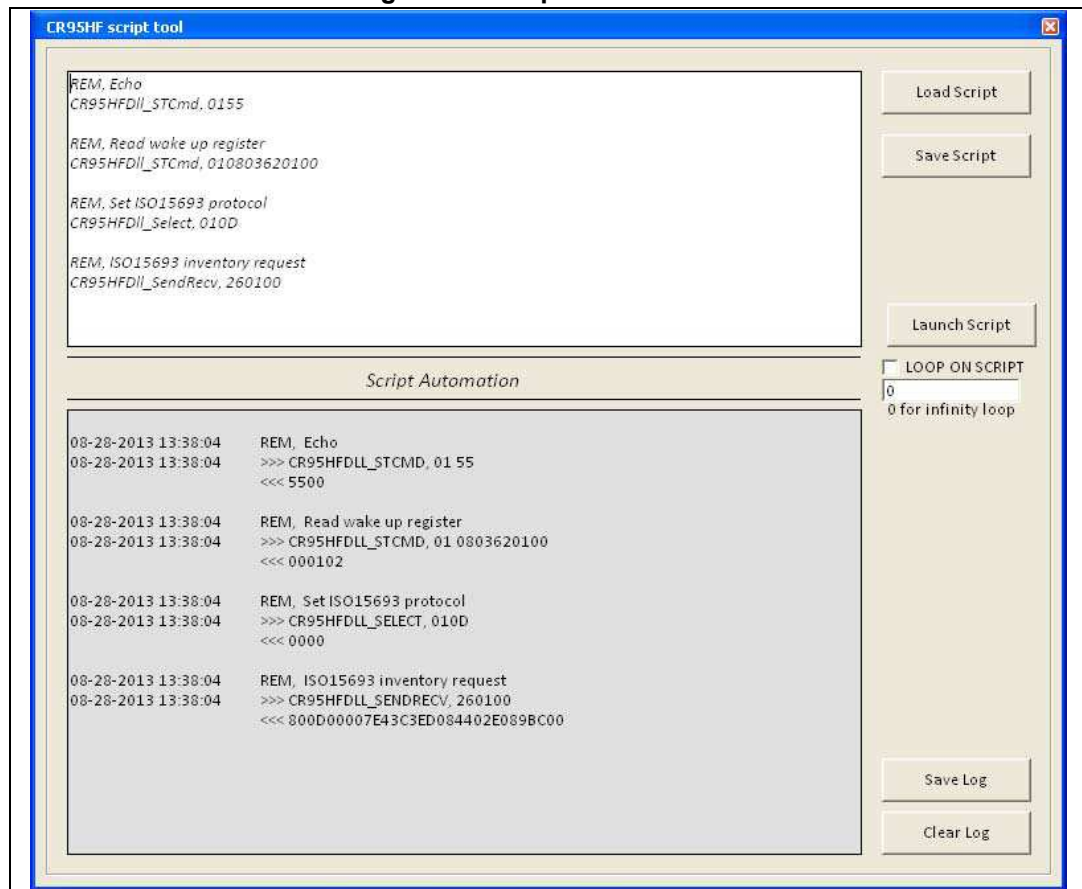

2.9 Help menu

Select the **Help** menu to access the following functions (see [Figure 44](#)):

- Change background color**
 This function changes the color of the main window. Once set, the background color is saved and recalled each time the software is used (see [Figure 45](#)).
- Script Help**
 This function allows to get information on CR95HF function syntax (see [Figure 46](#)). It is particularly useful when developing a script (see [Section 2.8.4: Script tool](#)).
- About ...**
 Click **About ...** to get information on the CR95HF development software (see [Figure 47](#)).

Figure 44. Help menu

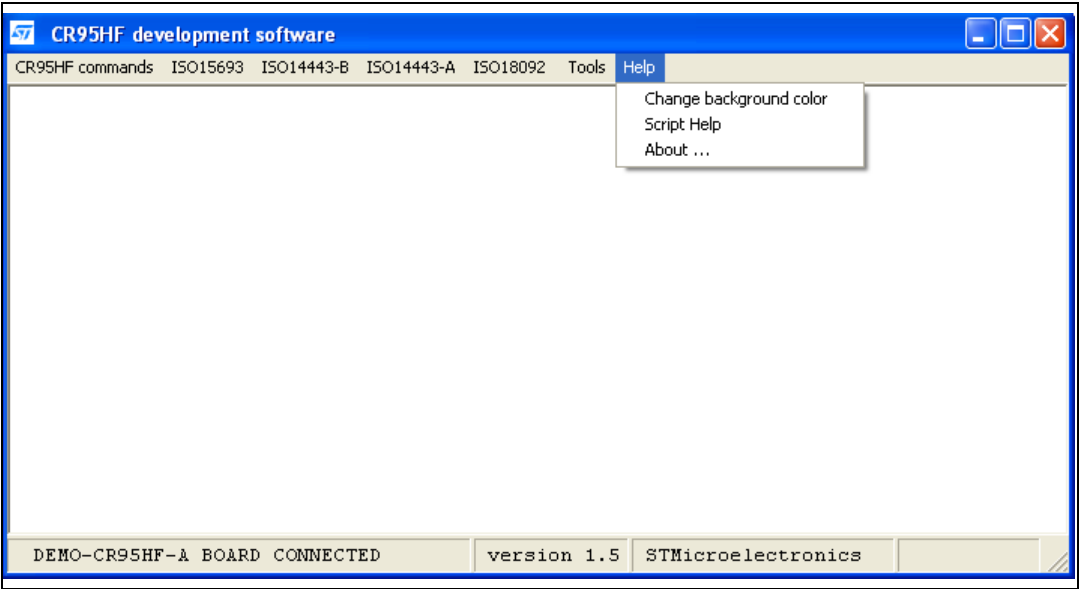


Figure 45. Change background color menu


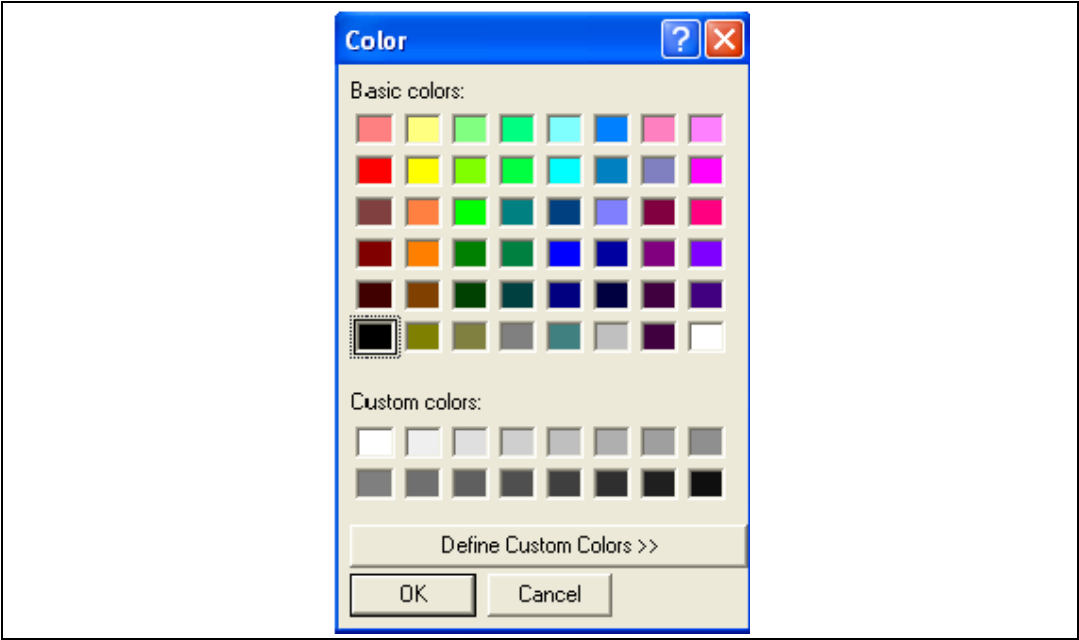


Figure 46. Script help



Figure 47. About window

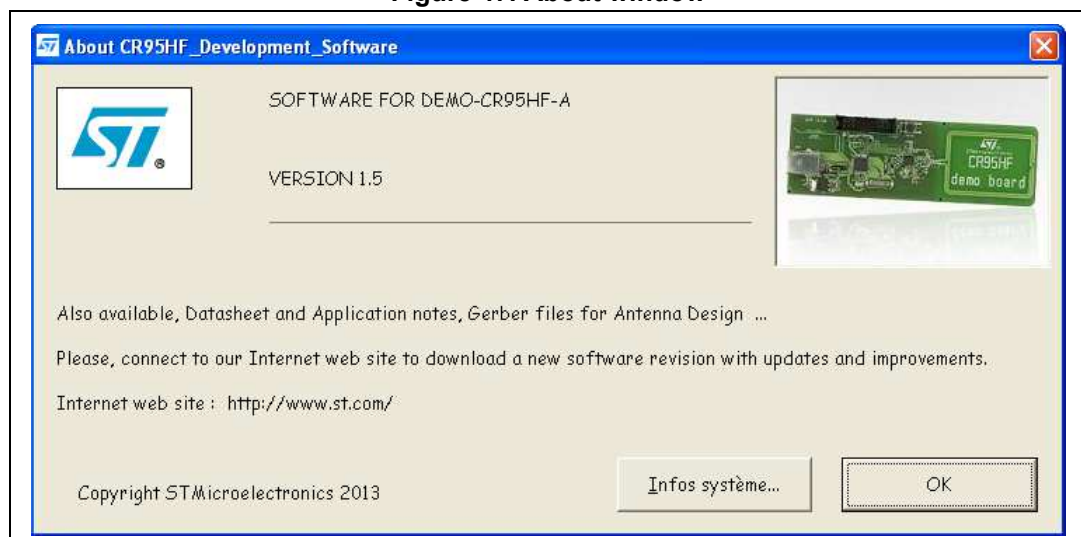

2.10 Log window

The log is displayed at the bottom of each window. It contains all the requests sent to the DEMO-CR95HF-A through the USB interface. The log contains the following information:

- Date and hour when the command has been sent.
- Request and parameters sent to the DEMO-CR95HF-A: name of the command sent to the board through the DLL, followed by all parameters in hexadecimal format.
- Answer from the CR95HF.

The command and parameter formats are compatible with the Script tool (see [Section 2.6: ISO14443-A menu](#)) and can be directly copied in a script file.


As an example, the log contains the information shown in [Figure 48](#) when an Idle command is sent to the board. In this example:

‘CR95HFDII_STCmd 01 070E0922003800180020606064743FFF’ means that:

- The CR95HFDII_STCmd request has been sent to the DEMO-CR95HF-A.
- ‘01’ is the header of CR95HFDII_STCmd command.
- ‘070E0922003800180020606064743FFF’ corresponds to an Idle command followed by its parameters.

‘FD00’ is the answer from the DEMO-CR95HF-A board.

Figure 48. Log window for an Idle command

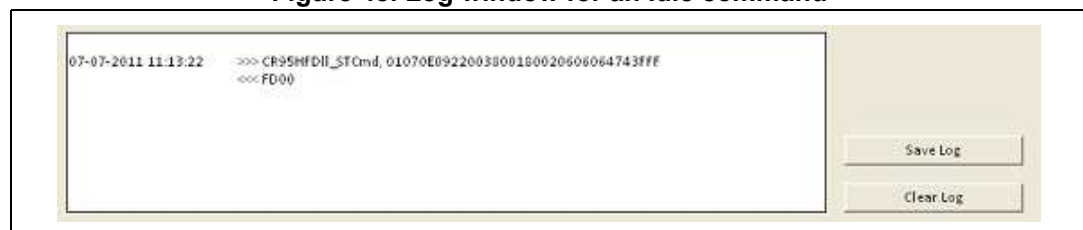

3 Revision history

Table 1. Document revision history

Date	Revision	Changes
12-Jul-2011	1	Initial release.
28-Oct-2011	2	Changed document title. Updated disclaimer on last page.
12-Sep-2013	3	Updated the title and the Introduction for RPN consistency. Added Section 2.6: ISO14443-A menu and Section 2.7: ISO18092 menu . Extended the list of Section 2.8.1: DEMO-CR95HF-A toolbox . Added Section 2.8.3: Auto detection tool . Updated several software figures (Figure 14 , Figure 18 to Figure 23 , Figure 25 to Figure 29 ...) Added Figure 33: Example of ISO14443-B user interface .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

