


ENGINEERING SPECIFICATIONS: ZURN Z7530-DV-HW Prefabricated stainless steel shower unit, designed for tempered water systems, single push button on-off control valve with service stop, with adjustable metering feature. Unit includes two-way diverter valve with handwall shower unit complete with 24" mounting bar unit, 60" metal hose and standard handset. Aqua-panel unit standard with 1/2" copper tubing assembly enclosed by 18 gage stainless steel #4 brushed finish shroud, chrome plated brass shower head with flow control on institutional bracket, side mount soap dish & all vandal proof securing screws.

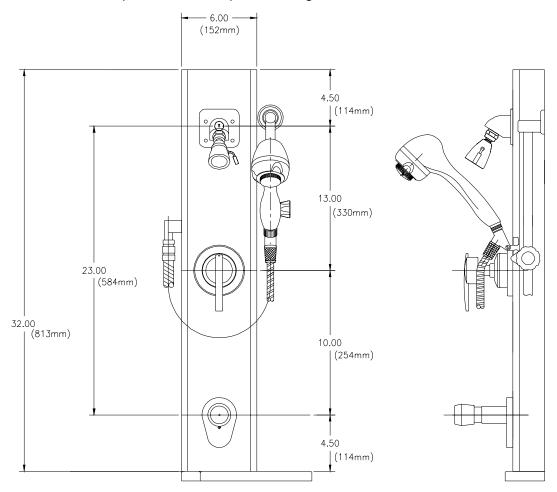

OPTIONS (Check/specify appropriate options)

- ____ TC Matching Shroud Extension to Cover thru Ceiling Piping (Specify extension height)
- _____TH Matching Shroud Cover for Concealed Horizontal Piping
- (Application drawings available for custom installations)
- __ LS Less Soap Dish
- ____ 14 ___ 14 Gage Stainless Steel Shroud
- ____ 16 Gage Stainless Steel Shroud
- ___ QD Quick Disconnect
 - i2 Fixed institutional shower head

APPROVALS

Tested to meet the following standards for valves and plumbing fittings: ANSI A112.18.1M.

ZURN INDUSTRIES, LLC COMMERCIAL BRASS OPERATION 2640 SOUTH WORK STREET FALCONER NY 14733 Phone: 1-800-997-3876 Fax: 1-919-775-3541 Www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED • 3544 Nashua Drive • Mississauga, Ontario L4V1L2 • Phone: 905/405-8272 Fax: 905/405-1292