



Lead Time: Turbo 1 Day 2 Days 3 Days 5 Days 7 Days 8-10 Days

PO# _____ Order Quote

SO# _____ Customer: _____ Contact: _____ Date: _____ Page: _____ of _____

Line	Quantity	Handing	Material	Frame Type	Opening Width	Opening Height	Jamb Depth	Throat	Profile	Head Face	Jamb Face	Rabbets	Fire Label (Min.)	Anchors	Locations	Hinges	Strike	Closer (PA or PA)	Construction	Glazing Bead Loose/Installed	See Notes	Mark #	Price
1																							
2																							
3																							
4																							
5																							
6																							
7																							
8																							

Material Legend	Frame Type Legend	Anchor Legend	Locations Legend	Strike Legend	Packaging
6C -16 Ga CRS 6A -16 Ga A60 4C -14 Ga CRS 4A -14 Ga A60 2C -12 Ga CRS 2A -12 Ga A60	S - Single P - Pair C - Cased Open M - Communicating D - Double Egress E - Elevation (Dwg.) BL - Borrowed Lite SL - Sidelite TF - Transom Lite TS - Transom & SL	CO - Compression Anchors - Base Clips CP - Compression Anchors - P&D Face EM - Existing Masonry Anchors MP - Multi-purpose Anchors SS - Steel Stud Anchors TA - T-Anchors WA - Wire Anchors WS - Wood Stud Anchors NO - No Anchors NT - Provide Anch:	AM - Amweld CE - Ceco CU - Curries FE - Fenestra HM - HMF Express ME - Mesker PI - Pioneer RE - Republic ST - Steelcraft * - See Chart	A - ASA B - Blank C - Conc. Vertical Rod D - Deadlock F - Flush Bolt R - Rim panic S - Surface Vertical Rod T - T Strike AD - ASA X Deadlock TD - T Strike X Deadlock	Type: _____ Total: _____ ~ Freight _____ Hinge Legend A - 4.5 S.W. D - 5 H.W. B - 4.5 H.W. N - None C - 5 S.W. E - Enter Below Construction Legend KD - Knock Down CW - Cont. Weld FW - Face Weld

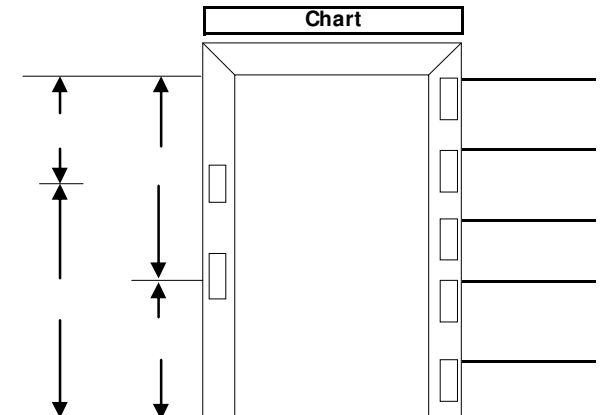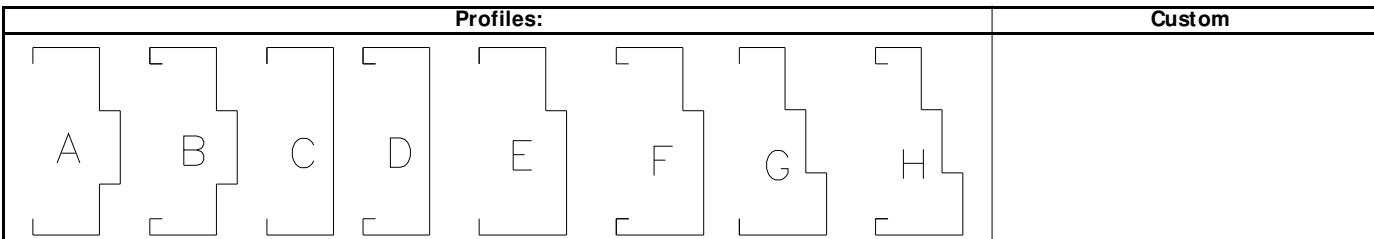

Notes	Line #