Document for Internet Connecting Using Huawei EC321 or EC325 on MAC OS X

1. **Software Requirement**
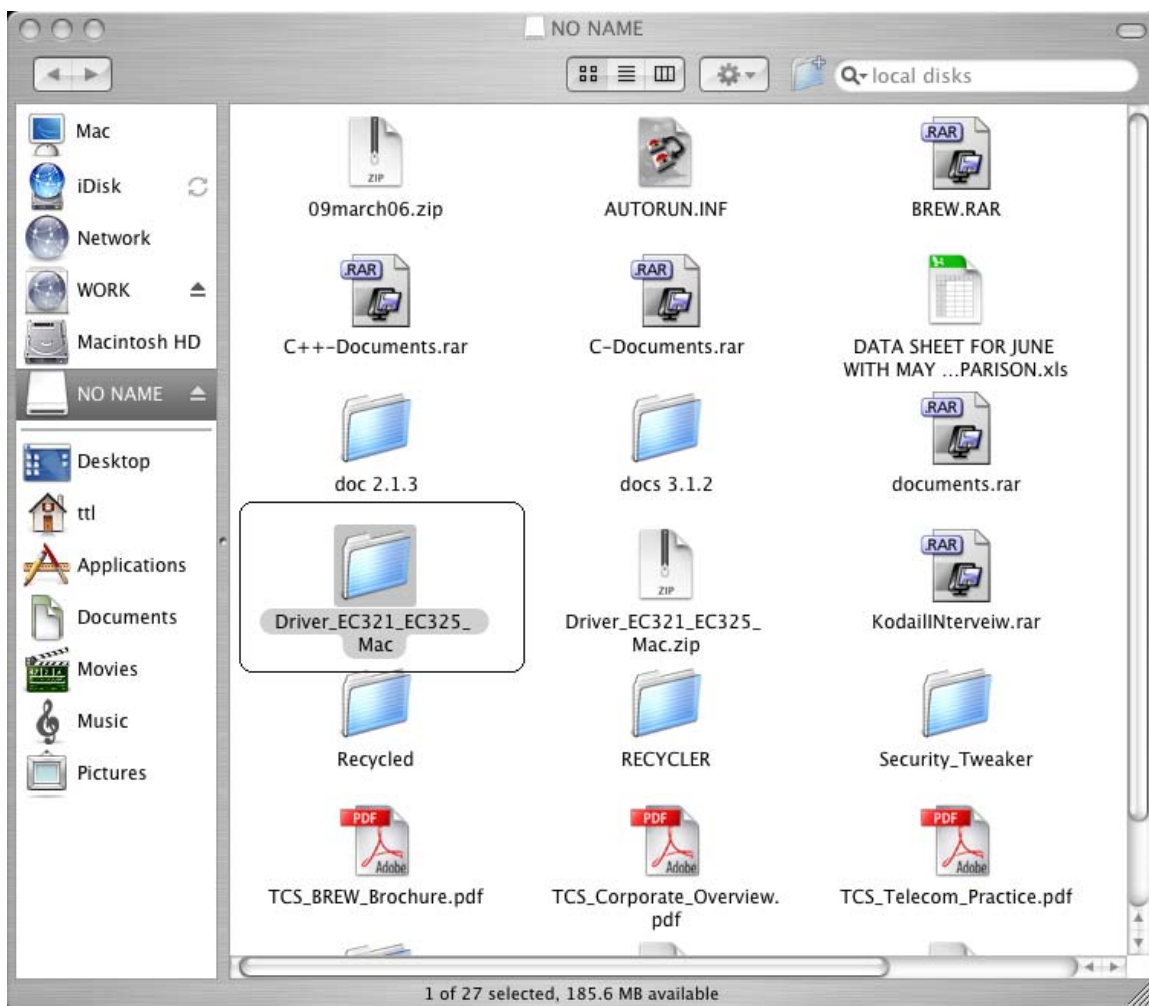
   - Mac OS X Version 10.2.8 or later

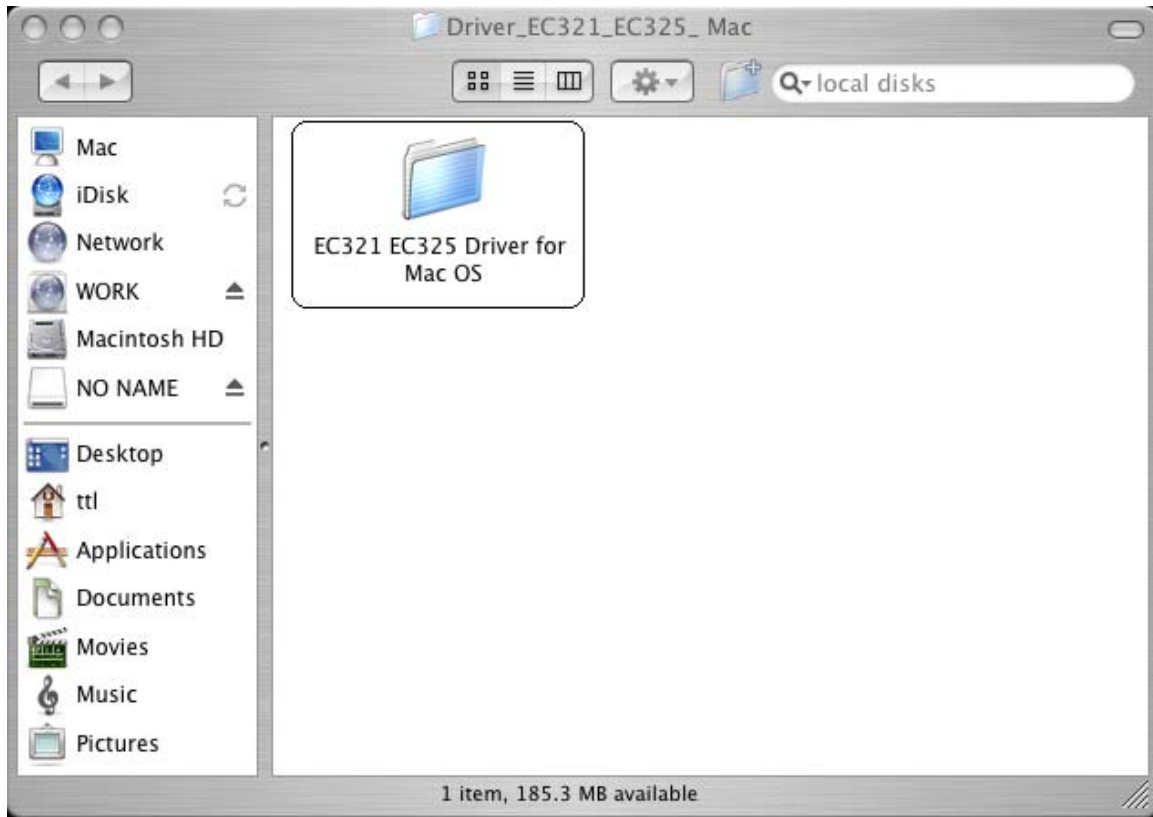2. **Hardware Requirement**

   - Huawei EC321 VData card or Huawei EC325 USB Modem
   - RUIM Card
   - Drivers for Huawei device on Mac

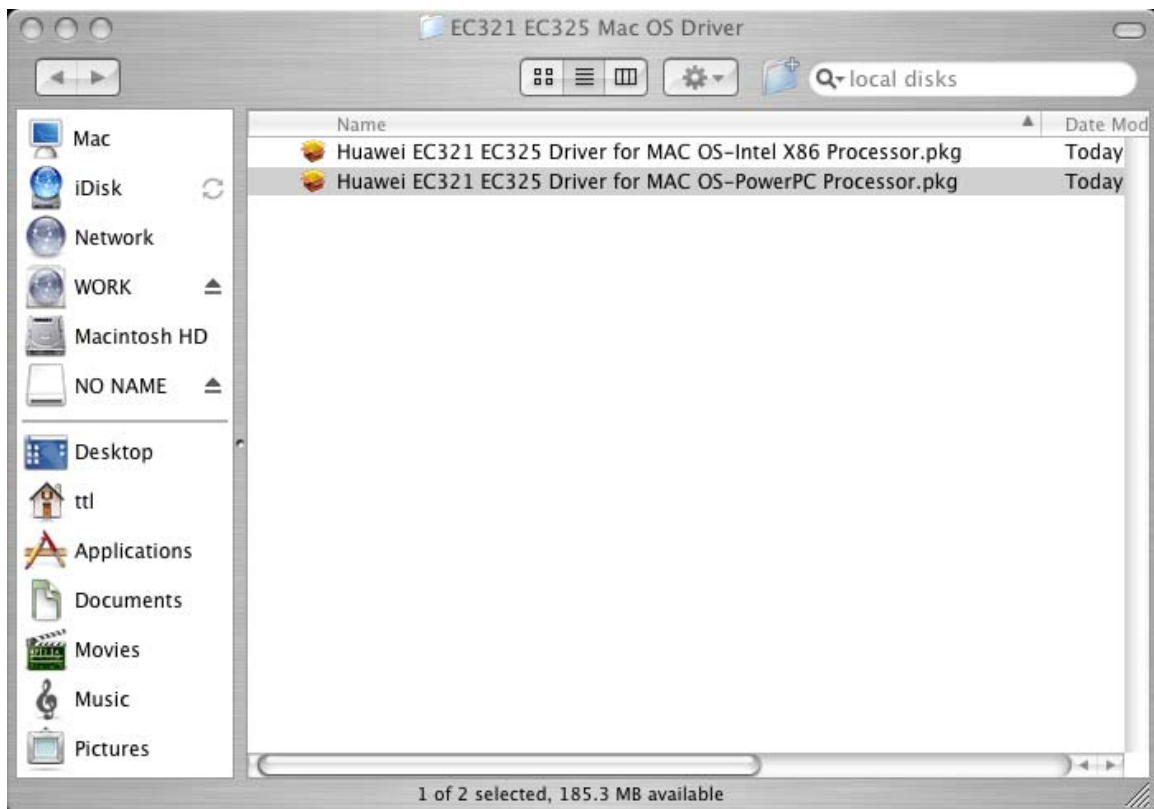   *Note: Disconnect the Data card or modem before installing the drivers.*

3. **Extract the driver Zip file, the below shown folder is created. Double click the folder.**

4. Open the folder.

5. Click on the Package file depending on the processor. Select PowerPC package if the installation is done on PowerPC. If the installation is done in Intel PC select Intel X86 package.
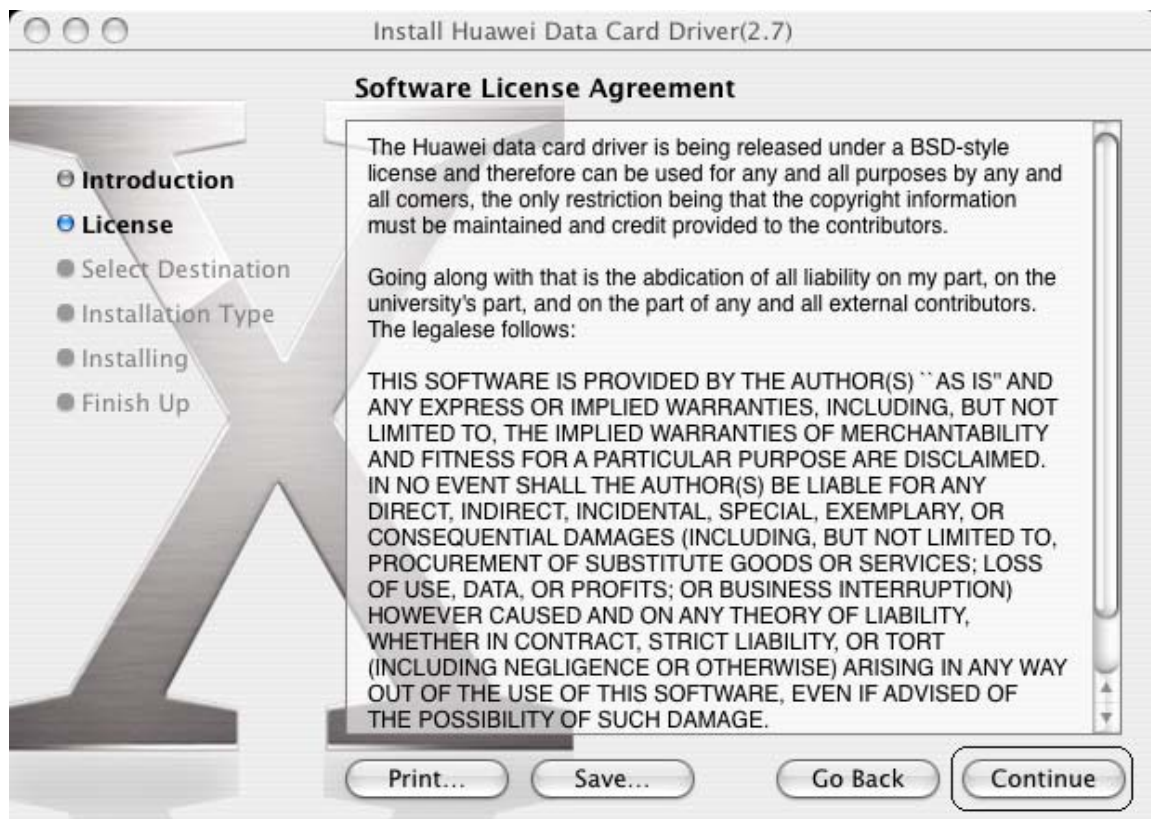
6. Once we double click on Package the following wizard appears. Click on [Continue]

Install Huawei Data Card Driver(2.7)

Welcome to the Huawei Data Card Driver(2.7) Installer

- **Introduction**
- License
- Select Destination
- Installation Type
- Installing
- Finish Up

IMPORTANT

Remove your Huawei data card from your machine before installing this driver.

[Go Back] [Continue]

7. To accept the License Agreement click on [Continue]

Install Huawei Data Card Driver(2.7)

Software License Agreement

- **Introduction**
- **License**
- Select Destination
- Installation Type
- Installing
- Finish Up

The Huawei data card driver is being released under a BSD-style license and therefore can be used for any and all purposes by any and all comers, the only restriction being that the copyright information must be maintained and credit provided to the contributors.

Going along with that is the abdication of all liability on my part, on the university's part, and on the part of any and all external contributors. The legalese follows:

THIS SOFTWARE IS PROVIDED BY THE AUTHOR(S) ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

[Print...] [Save...] [Go Back] [Continue]

8. The following wizard appears Click on **Agree** to continue with installation.

To continue installing the software, you must agree to the terms of the software license agreement.

Click Agree to continue or click Disagree to cancel the installation.

Disagree   Agree

9. Select a location to install the driver. Select the **Harddisk** and click on **Continue**

Install Huawei Data Card Driver(2.7)

Select a Destination

Select a destination volume to install the Huawei Data Card Driver(2.7) software.

- Introduction
- License
- Select Destination
- Installation Type
- Installing
- Finish Up

Macintosh HD
74.5GB (22.9GB Free)

NO NAME
250MB (184MB Free)

Installing this software requires 88.0KB of space.

You have selected to install this software on the volume "Macintosh HD ."

Go Back   Continue

10. The following wizard will appear provide Username & Password of admin user or current user.

Authenticate

Installer requires that you type your password.

Name:

Password:

▼ Details

? Cancel   OK

11. The Software installation is successfully completed. Click on **Close**

12. The driver installation is successfully completed. Now the dialup connection for the same has to be created. Follow the below steps to create dialup connection.
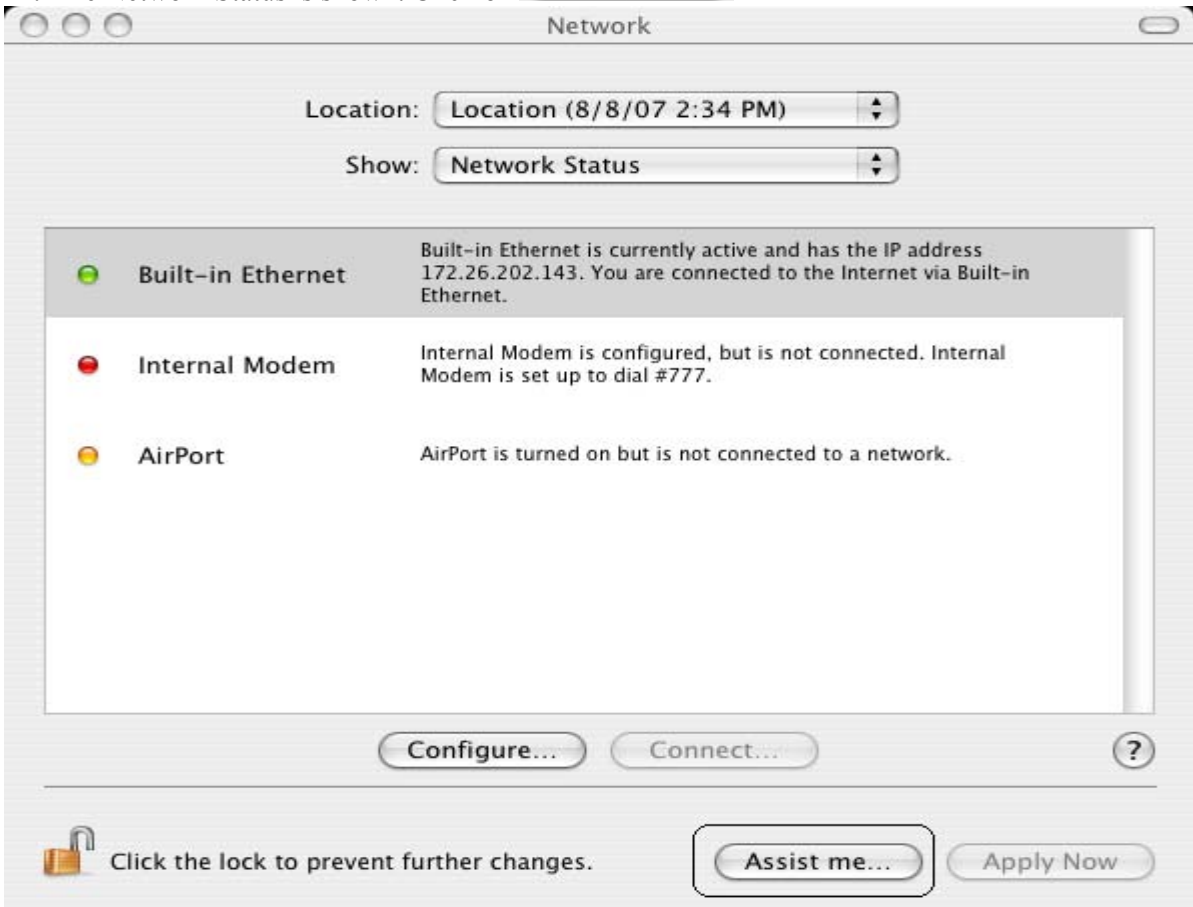
Go to System Preferences
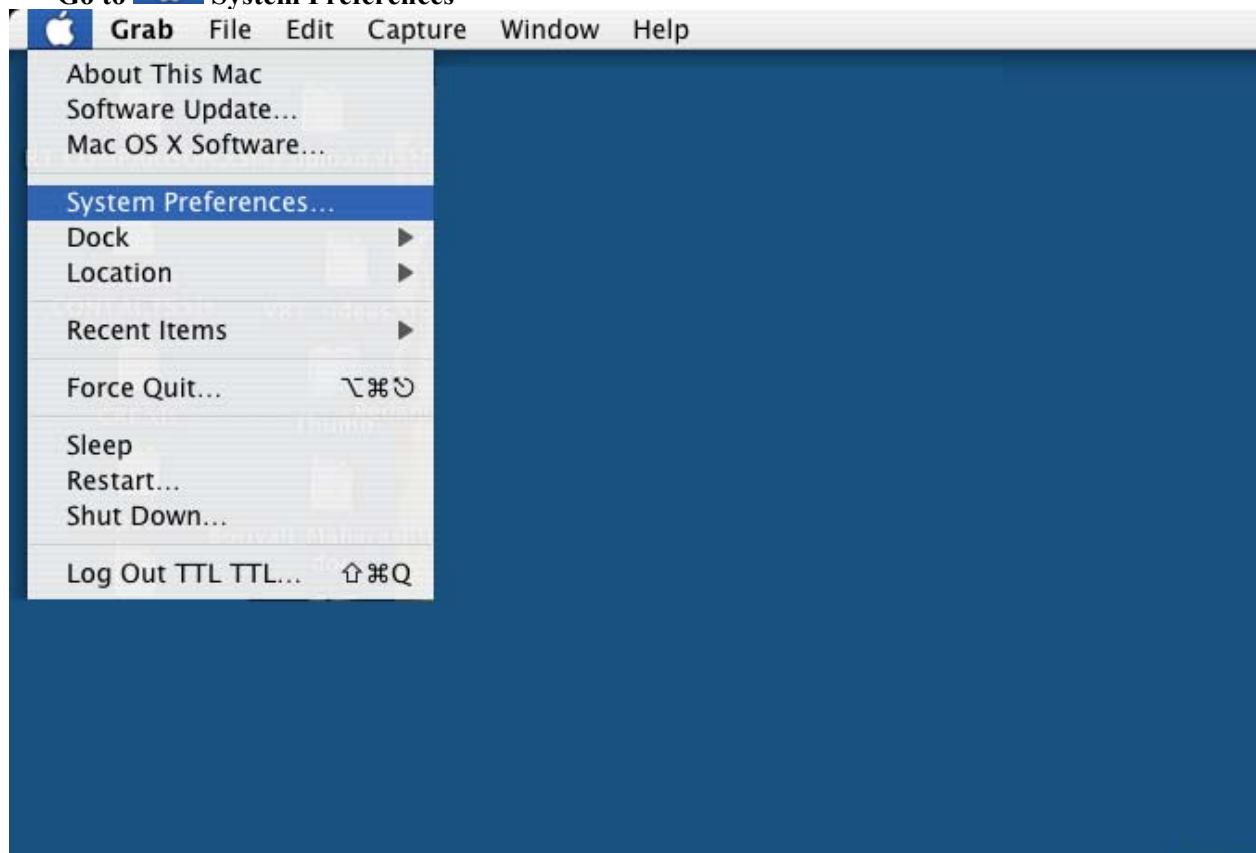
13. Select the **Network** from Internet & Network.
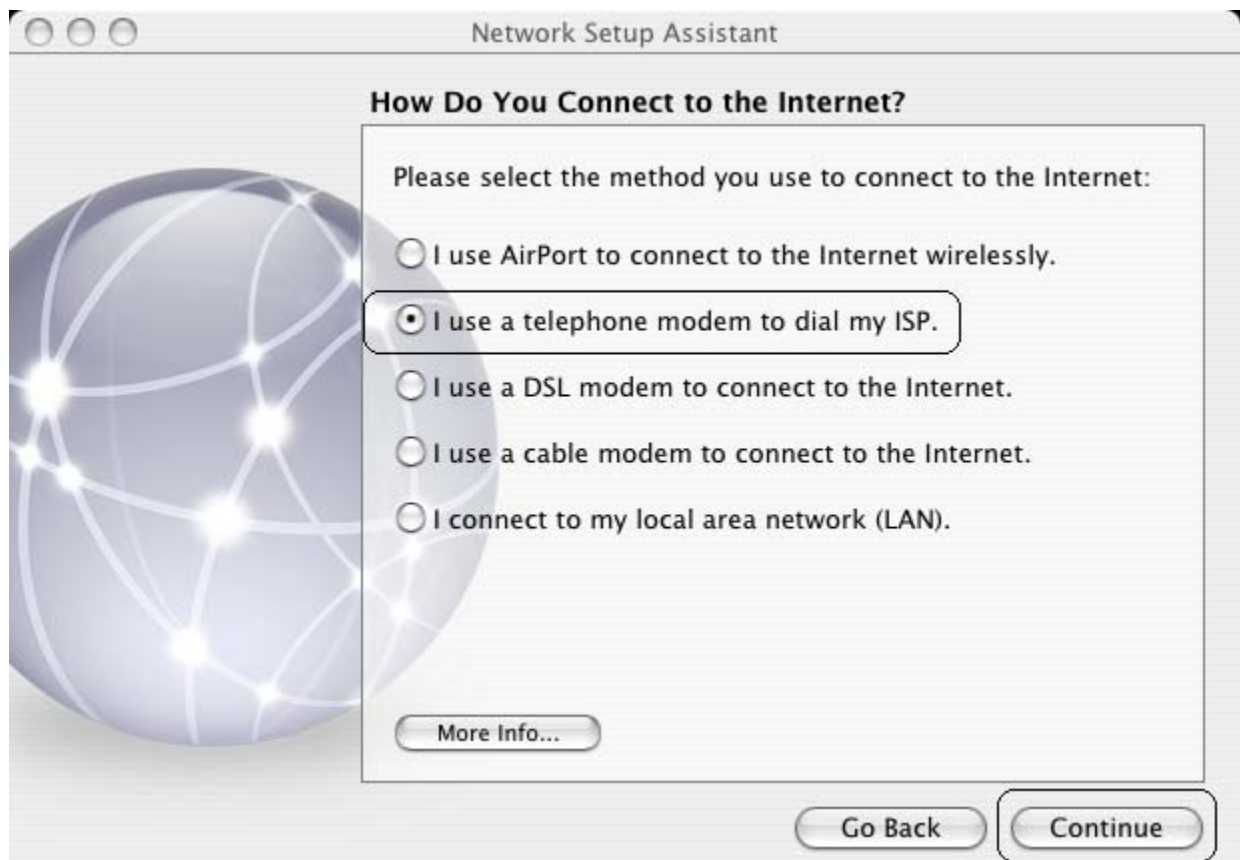

14. The Network Status is shown. Click on [Assist me...]

15. Click on [Continue]

```
○ ○ ○                    Network Setup Assistant

   Introduction

   This assistant will help you set up a connection to the
   Internet using your Internet service provider (ISP) or local
   network service.

   You must be able to connect to the Internet using an AirPort
   wireless network, a dial-up telephone modem, a DSL modem,
   a cable modem, or a local area network (LAN).

   To begin, create a network location to save your setup
   information.

   What do you want to name this location?
   Location Name:  Location (8/9/07 12:09 PM)
                   You can name the location anything you want,
                   such as "home", "work", or the name of your ISP.

   ( More Info... )

                              ( Go Back )    ( Continue )
```

16. Select the option I use a telephone modem to dial my ISP and click on [Continue]

```
○ ○ ○                    Network Setup Assistant

   How Do You Connect to the Internet?

   Please select the method you use to connect to the Internet:

   ○ I use AirPort to connect to the Internet wirelessly.

   ⦿ I use a telephone modem to dial my ISP.

   ○ I use a DSL modem to connect to the Internet.

   ○ I use a cable modem to connect to the Internet.

   ○ I connect to my local area network (LAN).

   ( More Info... )

                              ( Go Back )    ( Continue )
```
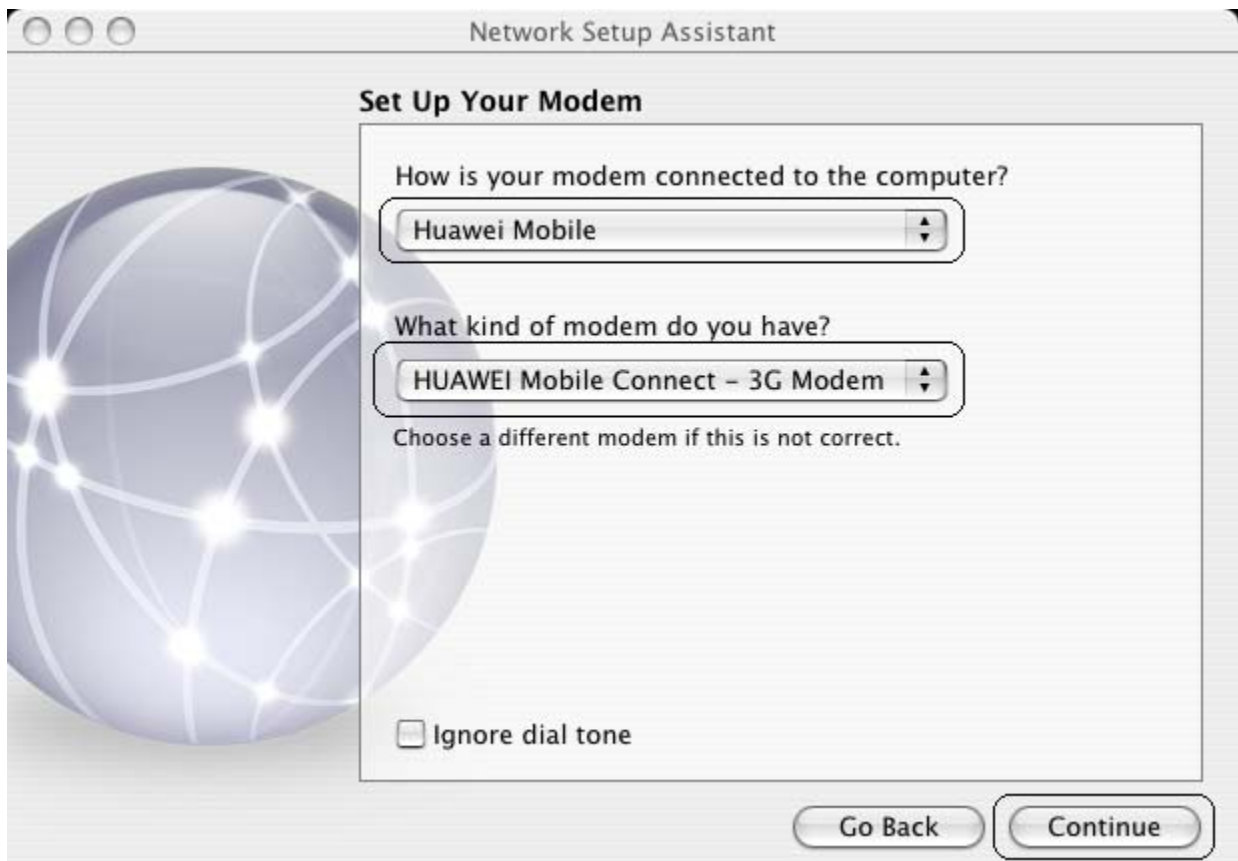
17. Provide the Account Name: **internet**   Password: **internet**   ISP Phone Number: **#777**

Network Setup Assistant

Setting Up a Telephone Modem Connection

You need to enter information before you can connect. If you don't have this information, contact your ISP.

If you use AOL, please quit Network Setup Assistant. Use the Network preference to set up your connection.

Account Name: internet

Password: ••••••••

Password: ••••••••
(Verify)

ISP Phone Number: #777

Number to get an outside line:

Do you have call waiting? ○ Yes   ● No

More Info...

Go Back   Continue

18. Select **Huawei Mobile** and **Huawei Mobile Connect – 3G Modem** as shown and
Click Continue

Network Setup Assistant

Set Up Your Modem

How is your modem connected to the computer?

Huawei Mobile

What kind of modem do you have?

HUAWEI Mobile Connect – 3G Modem

Choose a different modem if this is not correct.

☐ Ignore dial tone

Go Back   Continue

19. The dialup connection is created. Click on [Continue]
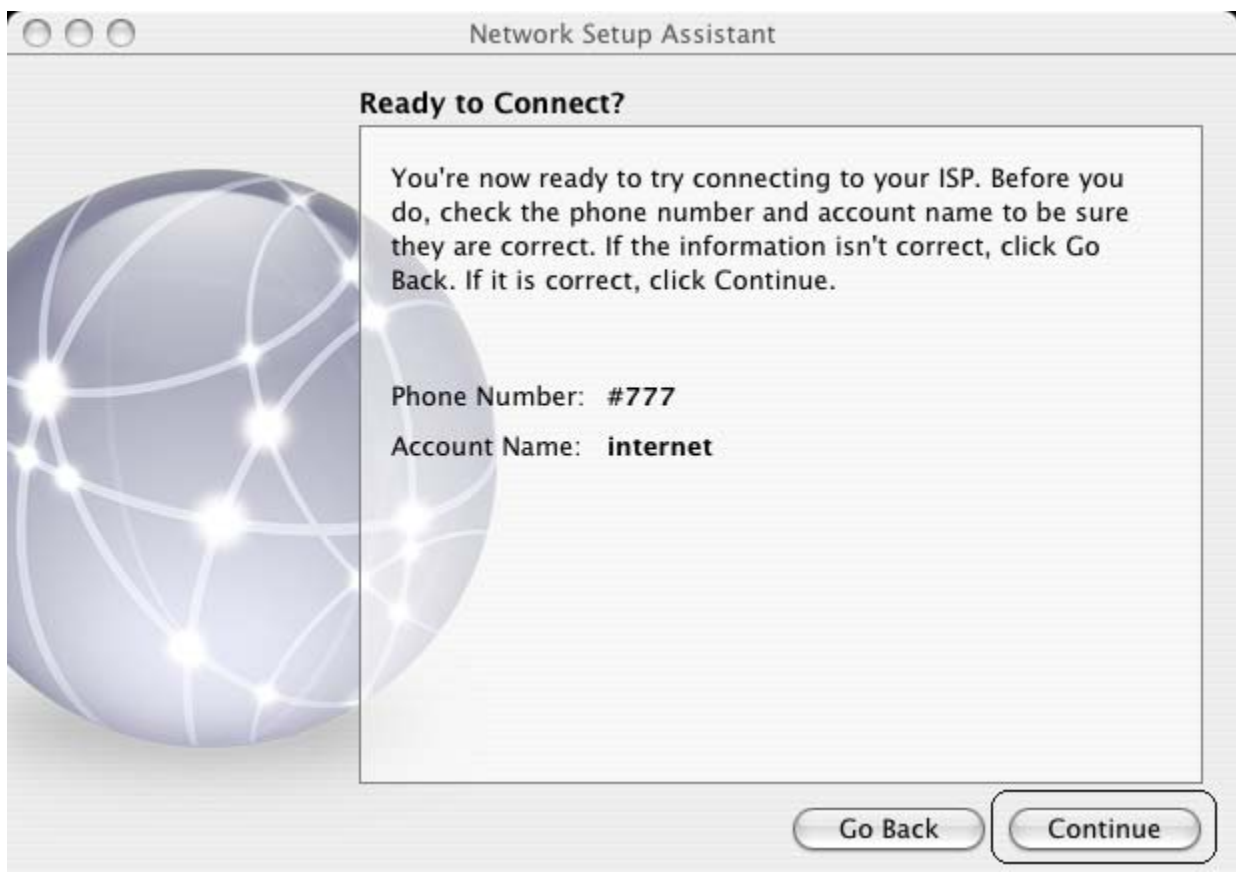
20. The device is connected and the status is shown in the Network window.