

DOWEX UPCORE Mono A2-500

A Uniform Particle Size, Type 2 Strong Base Anion Exchange Resin Specifically Designed for the UPCORE System

Product	Type	Matrix	Functional group
DOWEX* UPCORE* Mono A2-500	Type 2 strong base anion	Styrene-DVB, gel	Dimethylethanol amine

Guaranteed Sales Specifications		Cl ⁻ form
Total exchange capacity, min.	eq/l kgr/ft ³ as CaCO ₃	1.2 26.2
Water content	%	46 - 55
Bead size distribution†		
Mean particle size	µm	550 ± 50
Uniformity coefficient, max.		1.1
>850 µ, max.	%	5
<300 µ, max.	%	0.5
Whole uncracked beads, min.	%	95

Typical Physical and Chemical Properties		Cl ⁻ form
Total swelling (Cl ⁻ → OH ⁻)	%	15
Particle density	g/ml	1.09
Shipping weight	g/l lbs/ft ³	690 43

Recommended Operating Conditions

- Maximum operating temperature:
 - OH⁻ form 35°C (95°F)
 - Cl⁻ form 70°C (160°F)
- pH range 0 - 14
- Bed depth, min. 1,200 mm (4 ft)
- Pressure drop, design max. 1.5 bar (22 psi)
- Pressure drop, max. 2.5 bar (37 psi)
- Flow rates:
 - Service/fast rinse 5-60 m/h (2-24 gpm/ft²)
 - Regeneration/displacement rinse 4-10 m/h (1.6-4 gpm/ft²)
- Total rinse requirement 2 - 4 Bed volumes
- Regenerant 2-5% NaOH

DOWEX is a Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

LENNTECH, WATER TREATMENT AND AIR PURIFICATION

Rotterdamseweg 402M, 2629HH Delft, The Netherlands

Tel: +31(0)152610900 / Fax: +31(0)152616289

info@lennotech.com / <http://www.lennotech.com>

Typical properties and applications

DOWEX UPCORE Mono A2-500 strong base anion resin is a uniform particle size, gellular, type 2 anion resin designed for use in the UPCORE system. It has a special pore structure which facilitates the removal of organic matter from water and its subsequent elution from the resin.

The absence of large beads in DOWEX UPCORE Mono A2-500 resin results in extremely high operating capacity and good chemical efficiency.


DOWEX UPCORE Mono A2-500 resin has an excellent resistance to mechanical and osmotic stress which helps minimize resin attrition.

Packaging

25 liter bags or 5 cubic feet fiber drums

Figure 1. Pressure Drop Data

Temperature = 20° C (68° F)

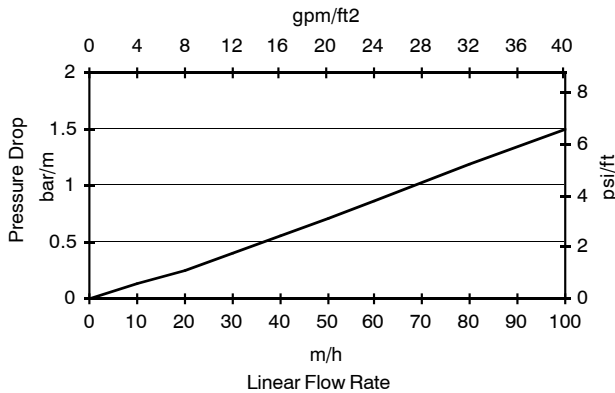

For other temperatures use:

$$P_T = P_{20^{\circ}\text{C}} / (0.026 T_{\text{C}} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68^{\circ}\text{F}} / (0.014 T_{\text{F}} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

DOWEX is a Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

LENNTECH, WATER TREATMENT AND AIR purification

Rotterdamseweg 402M, 2629HH Delft, The Netherlands

Tel: +31(0)152610900 / Fax: +31(0)152616289

info@lennotech.com / <http://www.lennotech.com>