

## ECHO ROUND 6.0 INTERIOR WALL


**EIW9226**



The Echo Round 6.0 is a versatile luminaire with its wide selection of light sources and mounting methods. Round 6.0 can provide the versatility to solve numerous lighting application challenges.

JOB NAME \_\_\_\_\_

TYPE \_\_\_\_\_

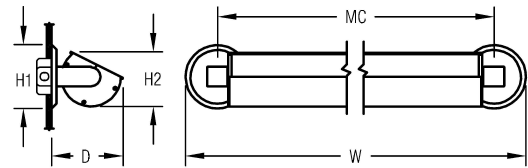

### Dimensions

W	D	MC	H1	H2
106.9 in	7.3 in	100.1 in	6.5 in	5.5 in
2715 mm	185 mm	2543 mm	165 mm	140 mm

### Weight

Consult Factory.

### Features

- Extruded aluminum construction provides durable protection for internal components and is recyclable.
- Cast aluminum end caps protect internal components and are recyclable.
- External fasteners are flush mounted, providing a clean design.
- Field adjustable housing locks into position, enabling precise fixture alignment for high-quality design performance.
- 94% reflective superwhite reflector is utilized in the highly-efficient and effective fluorescent optical design.
- Standard thermoset polyester powder coat paint provides durable protection in a palette of color options. Custom colors available upon request.

### Technical Notes

#### Accessories

- Only one louver option can be specified per fixture.
- Dust cover lens (DCL) cannot be used with cutoff shield (CS), Louver (LV) or 2-lamp dimming options.

#### Construction

- Hub mount supplied with round canopies.

#### Electrical

- Integral electronic fluorescent ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while eliminating the need for remote mounting and simplifying installation.
- Class "A" sound rated ballast for use in low ambient noise applications.
- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.
- Meets NEC 410.73 double-ended, fluorescent lamp ballast disconnect requirements.

#### Finish

- Housing and mounting components painted to match, unless otherwise specified.

### Mounting






- Cast aluminum canopies.
- Aluminum cover fits over a standard 4" octagonal junction box.

### Additional Documents

[Color Chart \(http://www.specSPI.com/PDFs/SPI\\_Color\\_Chart.pdf\)](http://www.specSPI.com/PDFs/SPI_Color_Chart.pdf)

MODEL NUMBER	LIGHT SOURCE	FINISH	VOLTAGE	LAMP OPTIONS	OPTIONS

Not all options are available in all configurations, consult factory for details.

Light Source			Photometry	Voltage		Options	
1F59		1F59WT8/Med Bipin	ITL53727	120V	120 Volt	CR	Corrosion Resistant
2F32		2F32WT8/Med Bipin	ITL53727	277V	277 Volt		
2F32DM		2F32WT8/Med Bipin Dimming	ITL53727	Lamp Options			
4F54		4F54WT5HO/Mini Bipin	ITL53727	DCL	Dust Cover Lens		
4F54DM		4F54WT5HO/Mini Bipin Dimming		LV2	Black Unidirectional Louver External		
				EMI	Emergency Ballast Integral		
				F	Fusing		

<sup>1</sup> T5 & T8 Fluorescent Linear Lamp(s) Not Included

#### Painted Finishes

PT01 SuperWhite	PT07 Light Taupe	PT13 Warm Gray	PT19 Blue	PT29 Red Brass	PT42 Sky Blue	PT48 Brass
PT02 White	PT08 Medium Taupe	PT14 Light Gray	PT20 Dark Green	PT31 Medium Bronze	PT43 Teal	PT49 Bronze
PT03 Morning Light	PT09 Medium Gray	PT15 Sage	PT21 Pearl White	PT32 Dark Bronze	PT44 Green	
PT04 Warm White	PT10 Dark Gray	PT16 Spruce	PT22 Platinum	PT33 Dark Blue	PT45 Purple	
PT05 Putty	PT11 Black	PT17 Red	PT27 Deep Copper	PT40 Yellow	PT46 Aluminum	
PT06 Warm Beige	PT12 Dark Chocolate	PT18 Deep Red	PT28 Dark Stainless	PT41 Orange	PT47 Deep Red Brass	

#### Kit Details