

**SPECIFICATIONS**

Interior

**COMPLIANCE 1.1**



ADA

# 4615 LED

## TENOR

Type:

Project:

Qty:

**Construction**

Solid brass with etched opal or hand-painted alabaster acrylic diffuser.

**Source**

LED lumen packages provide both direct and indirect illumination in 3000K, 3500K or 4000K color temperature options. Components are designed to be serviceable and replaceable. CRI > 82.

**Optics**

Advanced FA Optical System optimized for LED source and specific to luminaire distribution, size and shape.

**Electrical**

LED light engine consists of modular LED boards and 0-10V dimming driver rated for 50,000 hours at 25°C ambient temperature. eldoLED solodrive power supply integrally mounted. Modular boards and drivers are available for replacement or service.

**Dimming**

The eldoLED 0-10V dimming driver produces a linear dimming curve from 100% to 0.1%.

**Controls**

Optional intelligence allows for constant lumen management and facilitate simple networking and control via CAT-5e cable.

**Environment**

UL and cUL listed for interior dry location use. Ambient operating temperature 0°C to 30°C.

**Finish**

Polished Brass or Polished Chrome. Consult factory for custom finishes.

**Warranty**



5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Source	Wattage	Nominal Lumens (delivered)
LWP1A	17.5	517

Note: Representative family (4614) luminaire tested at 30K. Specific finishes, diffuser materials, and color temperatures will affect actual results.

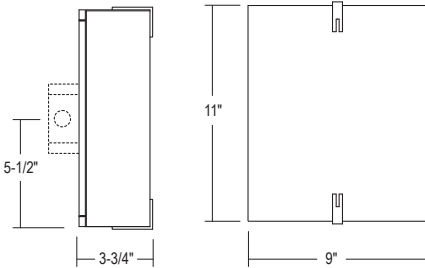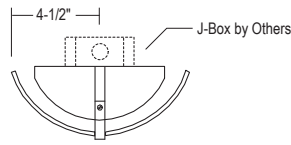

**CATALOG NUMBER**

Example: **WFW4615 LWP1A 30K MVOLT N80 OAE PB**

Series	Source	Color Temperature	Voltage	Electrical Option	Lens	Finish	Special
<b>WFW4615</b> Tenor Compliance 1.1 Series	<b>LWP1A</b> LED Wall 1	<b>30K</b> 3000K CCT <b>35K</b> 3500K CCT <b>40K</b> 4000K CCT	<b>MVOLT</b> Multi Volt 120V thru 277V	<b>N80</b> nLight Enabled Module (80% Constant Lumen Management) <b>N100</b> nLight Enabled Module	<b>OAE</b> Opal Acrylic Etched <b>FAH4</b> White Vein Hand Painted Faux Alabaster <b>FAH5</b> Antique Hand Painted Faux Alabaster (Beige) <b>FAH6</b> Gray Vein Hand Painted Faux Alabaster <b>FAH7</b> Beige Vein Hand Painted Faux Alabaster	<b>PB</b> Polished Brass <b>PC</b> Polished Chrome <b>CPF*</b> Custom Paint Finish <b>CMF*</b> Custom Metal Finish	<b>MOD*</b> Modification / Consult Factory

Describe Modification:



Notes

- Winona Lighting products are union made.
- Custom sizes and finishes available upon request.
- \*Available by modification only. Consult factory.

Weight

WFW4615 - 8 lbs.