

# PRODUCT CATALOGUE

September 2011

we'll see it through





Orrcon Steel is a leading distributor and manufacturer of steel, tube and pipe in Australia. Our distribution centres are strategically located in Queensland, New South Wales, Victoria, South Australia and Western Australia providing a national distribution network. This network is complemented by an extensive spread of resellers and stockists in metropolitan and rural Australia.

We have two Australian manufacturing sites - a structural tubular mill in Brisbane and a precision tube mill in Adelaide.

Orrcon Steel adheres to principles of quality, innovation, flexibility and dedication. These principles are achieved by going the extra mile in everything we do and working in partnership with our customers.

## **At Orrcon Steel - we'll see it through.**

### **OUR STEEL RANGE:**

#### **Structural Steel:**

Orrcon Steel offers a wide range of Electric Resistance Welding (ERW) Carbon Steel Structural Tubulars. Our Structural Tubular Products are a significant part of our production and are used in a wide range of structural applications from building structures to sporting arenas, major mining and industry infrastructure and for aesthetic structural use for airports and shipping terminals.

#### **Precision Tube:**

Orrcon Steel manufactures square, rectangular, round and oval precision tube and can also manufacture special shapes subject to enquiry. All precision products are manufactured to comply with AS/NZS 1450.

#### **Hot Rolled Structural Steel:**

Orrcon Steel offers a range of hot rolled structural products, including universal beams, universal columns, parallel flange channels, angles and merchant bar (including flats, angles & rounds) as well as a broad range of plate from 3mm up to 200mm.

#### **Pipelines – Seamless and Large Diameter Welded Pipe:**

Orrcon Steel provides an efficient alliance between its local clients and selected pre-qualified API accredited International pipe mills. From steel production to final delivery, our local technical and project management professionals will oversee each process of the supply of API 5L X grades, AS1163, C350, A106B (seamless grade) Linepipe.

### **EXTENDED RANGE:**

- Building Products - roofing, purlins, guttering, welding consumables.
- Fencing Products - barbed wire, fence pickets, post caps, fencing wire.
- Reinforcing Products - mesh, deformed bar.
- Hot dipped galvanised pipe.

## SECTION ONE - Tube & Pipe

2

<b>1.1 Structural Tube and Pipe</b>	<b>2</b>	<b>1.2 Precision Tube</b>	<b>12</b>
1.1.1 Square Hollow Sections (SHS)	3	1.2.1 Square	13
1.1.2 Rectangular Hollow Sections (RHS)	6	1.2.2 Rectangular	15
1.1.3 Rectangular Hollow Sections (RHS) - Non Standard	8	1.2.3 Round	17
1.1.4 Circular Hollow Sections (CHS) AS/NZS 1163 & AS 1074	9	1.2.4 Oval Tube	19
1.1.5 Circular Hollow Sections (CHS) AS/NZS 1163 & API 5L	10	1.2.5 Special Shapes	19
		<b>1.3 Yard Rail</b>	<b>20</b>
		<b>1.4 Silo Sections</b>	<b>20</b>
		<b>1.5 Hot Dip Galvanised Pipe</b>	<b>21</b>
		<b>1.6 Tube &amp; Pipe Information</b>	<b>23</b>
		1.6.1 Structural Tube & Pipe Information	23
		1.6.2 Precision Tube Information	25

## SECTION TWO - Hot Rolled Structural & Plate

28

<b>2.1 Section Translation Guide (STG)</b>	<b>29</b>	<b>2.6 Merchant Bar</b>	<b>36</b>
<b>2.2 Universal Beams</b>	<b>30</b>	2.6.1 Rounds	36
<b>2.3 Universal Columns</b>	<b>31</b>	2.6.2 Squares	36
<b>2.4 Parallel Flange Channels</b>	<b>32</b>	2.6.3 Flats	37
<b>2.5 Angles</b>	<b>33</b>	<b>2.7 Plate</b>	<b>40</b>
2.5.1 Equal Angles	33	2.7.1 Plain Plate	40
2.5.2 Unequal Angles	35	2.7.2 Checker Plate	41
		<b>2.8 Steel Sheet Coated &amp; Uncoated</b>	<b>42</b>

## SECTION THREE - General Building Products

43

<b>3.1 Roofing, Cladding, Purlins, Accessories</b>	<b>44</b>	<b>3.2 Fencing &amp; Wire Mesh Products</b>	<b>51</b>
3.1.1 Roofing Profiles	44	3.2.1 COLORBOND® Fencing	51
3.1.2 Wall Cladding Profiles	45	3.2.2 General Fencing and Wire Mesh	51
3.1.3 Roof Battens	46	<b>3.3 Industrial Access Systems &amp; Components</b>	<b>53</b>
3.1.4 Purlins	47	<b>3.4 Reinforcing Products</b>	<b>54</b>
3.1.5 Rainwater Products	50	<b>3.5 Building Consumable Products</b>	<b>57</b>
3.1.6 Accessories	50	<b>3.6 Building Accessories &amp; Tools</b>	<b>58</b>

## SECTION FOUR - General Information

59


<b>4.1 Test Certificates and LOC's</b>	<b>60</b>	<b>4.5 End Coding Charts</b>	<b>68</b>
<b>4.2 Packaging, Handling &amp; Storage</b>	<b>61</b>	4.5.1 End Coding Chart - Hot Rolled Structural	68
<b>4.3 Material Safety Data Information</b>	<b>61</b>	4.5.2 End Coding Chart - Tube & Pipe	70
<b>4.4 Glossary of Terms</b>	<b>63</b>		

we'll see it through




1

# Structural Tube & Pipe

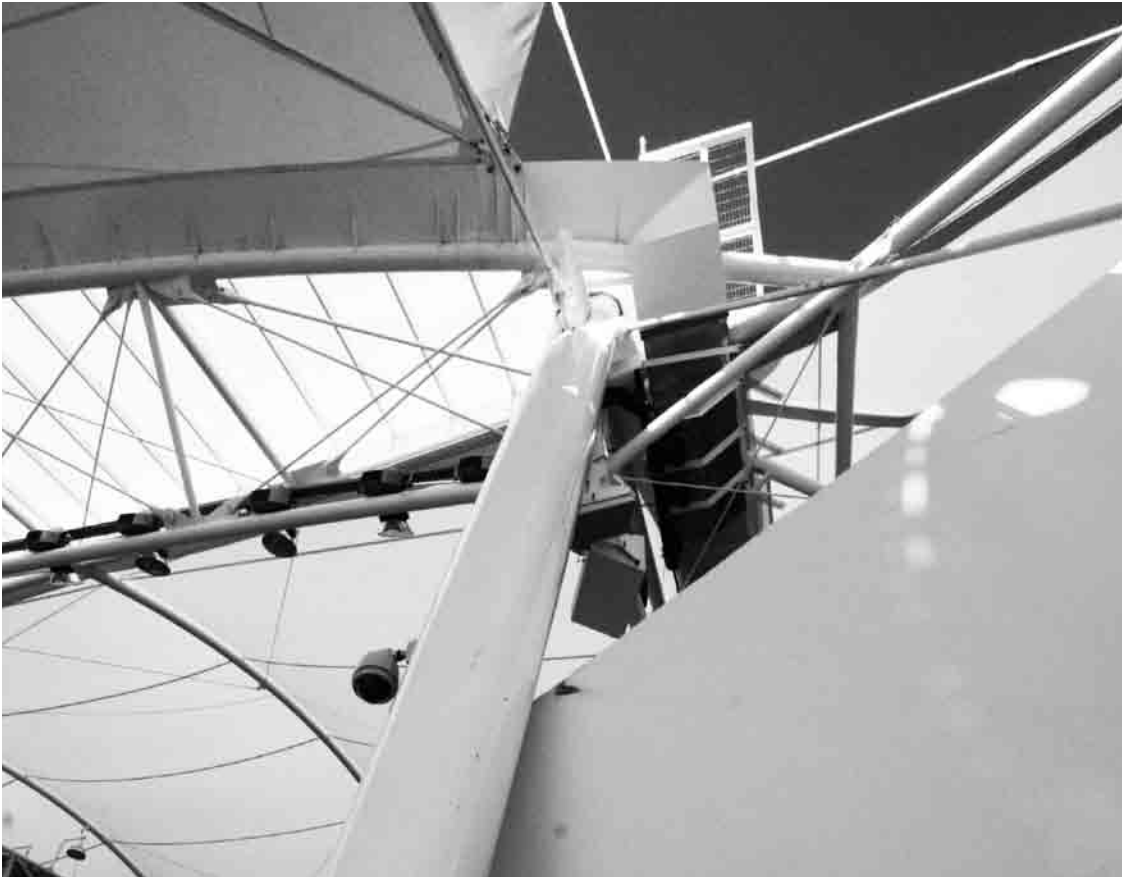

## 1.1.1 SQUARE HOLLOW SECTIONS (SHS)



Section: Square (SHS)  
 Standard - Grade: AS/NZS 1163 - C350L0  
 Surface Finish: PTD / ALLGAL / OILED / NOPC\*

Size dxb (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack	Lengths / MiniPak
		PTD	ALLGAL				
<b>6500mm Lengths Standard</b>							
20 x 20	1.6	✓	✓	0.87	1146	100	49
25 x 25	1.6	✓	✓	1.12	890	100	49
25 x 25	2.0	✓	✓	1.36	733	100	49
25 x 25	2.5	✓	✓	1.64	610	100	49
25 x 25	3.0	✓	✓	1.89	529	100	49
<b>8000mm Length Standard</b>							
30 x 30	1.6	✓	✓	1.38	727	100	49
30 x 30	2.0	✓	✓	1.68	596	100	49
30 x 30	2.5	✓	✓	2.03	492	100	49
30 x 30	3.0	✓	✓	2.36	423	64	36
35 x 35	1.6	✓	✓	1.63	615	100	49
35 x 35	2.0	✓	✓	1.99	502	100	49
35 x 35	2.5	✓	✓	2.42	412	64	30
35 x 35	3.0	✓	✓	2.83	353	64	30
40 x 40	1.6	✓	✓	1.88	533	81	36
40 x 40	2.0	✓	✓	2.31	434	81	36
40 x 40	2.5	✓	✓	2.82	355	64	30
40 x 40	3.0	✓	✓	3.30	303	64	30
40 x 40	4.0	✓	✓	4.09	244	49	25
50 x 50	1.6	✓	✓	2.38	420	64	30
50 x 50	2.0	✓	✓	2.93	341	64	30
50 x 50	2.5	✓	✓	3.60	278	49	25
50 x 50	3.0	✓	✓	4.25	236	49	25
50 x 50	4.0	✓	✓	5.35	187	36	20
50 x 50	5.0	✓	✓	6.39	156	30	16
50 x 50	6.0	✓	✓	7.32	137	25	12
<b>8000mm &amp; 12000mm Lengths Standard</b>							
65 x 65	1.6	✓	✓	3.13	319	49	25
65 x 65	2.0	✓	✓	3.88	258	42	20
65 x 65	2.5	✓	✓	4.78	209	42	20
65 x 65	3.0	✓	✓	5.66	177	36	20
65 x 65	4.0	✓	✓	7.23	138	30	16
65 x 65	5.0	✓	✓	8.75	114	25	12
65 x 65	6.0	✓	✓	10.15	99	20	12

Table continues over page


we'll see it through



## 1.1.1 SQUARE HOLLOW SECTIONS (SHS) CONT...

1

1.1.1 Square Hollow Sections (SHS)



Section: Square (SHS)  
 Standard - Grade: AS/NZS 1163 - C350L0  
 Surface Finish: PTD / ALLGAL / OILED / NOPC\*


Size dxb (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack	Lengths / MiniPak
		PTD	ALLGAL				
<b>8000mm &amp; 12000mm Lengths Standard</b>							
75 x 75	2.0	✓	✓	4.50	222	30	16
75 x 75	2.5	✓	✓	5.56	180	30	16
75 x 75	3.0	✓	✓	6.60	152	30	16
75 x 75	3.5	✓	✓	7.53	133	25	12
75 x 75	4.0	✓	✓	8.49	118	25	12
75 x 75	5.0	✓	✓	10.32	97	20	9
75 x 75	6.0	✓		12.03	83	16	9
89 x 89	2.0	✓	✓	5.38	186	25	9
89 x 89	2.5	✓	✓	6.66	150	20	9
89 x 89	3.5	✓	✓	9.07	110	20	9
89 x 89	5.0	✓	✓	12.51	80	16	9
89 x 89	6.0	✓		14.67	68	12	6
100 x 100	2.0	✓	✓	6.07	165	20	12
100 x 100	2.5	✓	✓	7.53	133	20	9
100 x 100	3.0	✓	✓	8.96	112	20	9
100 x 100	4.0	✓	✓	11.63	86	12	9
100 x 100	5.0	✓	✓	14.24	70	12	6
100 x 100	6.0	✓		16.74	60	12	6
100 x 100	9.0	✓		23.50	43	9	

Table continues over page

## 1.1.1 SQUARE HOLLOW SECTIONS (SHS) CONT...

1

1.1.1 Square Hollow Sections (SHS)



Section: Square (SHS)  
Standard - Grade: AS/NZS 1163 - C350L0  
Surface Finish: PTD / ALLGAL / OILED / NOPC\*

Size dx b (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack 8000mm	Lengths / Pack 12000mm	Lengths / MiniPak 8000 & 12000mm
		PTD	ALLGAL					
<b>8000mm &amp; 12000mm Lengths Standard</b>								
125 x 125	4.0	✓	✓	14.80	68	9	9	6
125 x 125	5.0	✓	✓	18.17	55	9	9	6
125 x 125	6.0	✓		21.45	47	9	9	4
125 x 125	9.0	✓		30.60	33	8	4	
150 x 150	5.0	✓		22.10	45	9	6	
150 x 150	6.0	✓		26.20	38	6	6	
150 x 150	9.0	✓		37.70	27	6	4	
200 x 200	5.0	✓		29.90	33	6	4	
200 x 200	6.0	✓		35.60	28	4	4	
200 x 200	9.0	✓		51.80	19	4	2	
200 x 200	12.5	✓		69.40	14	2	2	
200 x 200	16.0	✓		85.50	12	1	1	
250 x 250	6.0	✓		45.00	22	4	2	
250 x 250	9.0	✓		65.90	15	2	2	
250 x 250	12.5	✓		89.00	11		1	
250 x 250	16.0	✓		111.00	9		1	
300 x 300	6.0	✓		54.42	18	1	1	
300 x 300	9.0	✓		80.05	12		1	
300 x 300	12.5	✓		109.00	9		1	
300 x 300	16.0	✓		136.00	7		1	
350 x 350	9.0	✓		94.18	11		1	
350 x 350	12.5	✓		128.00	8		1	
350 x 350	16.0	✓		161.00	6		1	
400 x 400	9.0	✓		108.31	9		1	
400 x 400	12.5	✓		148.00	7		1	
400 x 400	16.0	✓		186.00	5		1	

**NOTE:**

- Non standard sizes, surface finishes and lengths available subject to enquiry. Minimum order quantities (MOQ's) apply.
- C450L0 grade available for some sizes, subject to enquiry. Minimum order quantities (MOQ's) apply.
- NOPC & OILED available subject to enquiry.

\* Refer to Glossary of Terms

we'll see it through




5

## 1.1.2 RECTANGULAR HOLLOW SECTIONS (RHS)

1

1.1.2 Rectangular Hollow Sections (RHS)



Section: Rectangular (RHS)  
 Standard - Grade: AS/NZS 1163 - C350L0  
 Surface Finish: PTD / ALLGAL / OILED / NOPC\*

Size dxb (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack	Lengths / MiniPak
		PTD	ALLGAL				
<b>8000mm Lengths Standard</b>							
50 x 25	1.6	✓	✓	1.75	571	96	48
50 x 25	2.0	✓	✓	2.15	465	96	48
50 x 25	2.5	✓	✓	2.62	382	72	36
50 x 25	3.0	✓	✓	3.07	326	60	30
65 x 35	1.6	✓	✓	2.38	420	54	24
65 x 35	2.0	✓	✓	2.93	341	54	24
65 x 35	2.5	✓	✓	3.60	278	54	24
65 x 35	3.0	✓	✓	4.25	236	45	21
65 x 35	4.0	✓	✓	5.35	187	45	21
75 x 25	1.6	✓	✓	2.38	420	65	32
75 x 25	2.0	✓	✓	2.93	341	65	32
75 x 25	2.5	✓	✓	3.60	278	48	24
75 x 50	1.6	✓	✓	3.01	332	42	20
75 x 50	2.0	✓	✓	3.72	269	42	20
75 x 50	2.3	✓	✓	4.24	236	42	20
75 x 50	2.5	✓	✓	4.58	218	42	20
75 x 50	3.0	✓	✓	5.42	184	35	18
75 x 50	4.0	✓	✓	6.92	145	28	12
75 x 50	5.0	✓	✓	8.35	120	24	12
75 x 50	6.0	✓	✓	9.67	103	20	12
100 x 50	1.6	✓	✓	3.64	275	32	15
100 x 50	2.0	✓	✓	4.50	222	32	15
100 x 50	2.5	✓	✓	5.56	180	32	15
100 x 50	3.0	✓	✓	6.60	152	32	15
100 x 50	3.5	✓	✓	7.53	133	24	12
100 x 50	4.0	✓	✓	8.49	118	24	12
100 x 50	5.0	✓	✓	10.32	97	18	9
100 x 50	6.0	✓	✓	12.03	83	15	9


**NOTE:**

- Some 5.0mm ALLGAL sections available ex-rolling. Minimum order quantities (MOQ's) apply.
- Non standard sizes, surface finishes and lengths available subject to enquiry. Minimum order quantities (MOQ's) apply.
- C450L0 grade available for some sizes, subject to enquiry. Minimum order quantities (MOQ's) apply.
- NOPC & OILED available subject to enquiry.

\* Refer to Glossary of Terms



## 1.1.2 RECTANGULAR HOLLOW SECTIONS (RHS) CONT...



Section: Rectangular (RHS)  
 Standard - Grade: AS/NZS 1163 - C350L0  
 Surface Finish: PTD / ALLGAL / OILED / NOPC\*


Size dxb (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack 8000mm	Lengths / Pack 12000mm	Lengths / MiniPak 8000 & 12000mm
		PTD	ALLGAL					
<b>8000mm &amp; 12000mm Lengths Standard</b>								
125 x 75	2.0	✓	✓	6.07	165	20		12
125 x 75	2.5	✓	✓	7.53	133	20	20	12
125 x 75	3.0	✓	✓	8.96	112	20	20	12
125 x 75	4.0	✓	✓	11.63	86	15	15	8
125 x 75	5.0	✓	✓	14.24	70	15	15	8
125 x 75	6.0	✓		16.74	60	12	12	6
150 x 50	2.0	✓	✓	6.07	165	21	21	15
150 x 50	2.5	✓	✓	7.53	133	21	21	12
150 x 50	3.0	✓	✓	8.96	112	21	21	12
150 x 50	4.0	✓	✓	11.63	86	15	15	8
150 x 50	5.0	✓	✓	14.24	70	15	15	8
150 x 50	6.0	✓		16.74	60	15	15	8
150 x 100	3.0	✓	✓	11.31	88	12	12	8
150 x 100	4.0	✓	✓	14.77	68	12	12	8
150 x 100	5.0	✓	✓	18.17	55	12	12	8
150 x 100	6.0	✓		21.45	47	9	9	4
150 x 100	9.0	✓		30.60	33	6	4	4
200 x 100	4.0	✓		17.90	56	8	6	
200 x 100	5.0	✓		22.10	45	8	6	
200 x 100	6.0	✓		26.20	38	8	4	
200 x 100	9.0	✓		37.70	27	6	4	
250 x 150	5.0	✓		29.94	33	6	4	
250 x 150	6.0	✓		35.58	28	4	4	
250 x 150	9.0	✓		51.79	19	4	2	
250 x 150	12.5	✓		69.40	14	2	2	
250 x 150	16.0	✓		85.50	12	1	1	
300 x 200	6.0	✓		45.00	22		2	
300 x 200	9.0	✓		65.92	15		2	
300 x 200	12.5	✓		89.00	11		1	
300 x 200	16.0	✓		111.00	9		1	
350 x 250	12.5	✓		109.00	9		1	
350 x 250	16.0	✓		136.00	7		1	
400 x 200	6.0	✓		54.42	18	1		
400 x 200	9.0	✓		80.05	12	1		
400 x 200	12.5	✓		109.00	9		1	
400 x 300	9.0	✓		94.18	11		1	
400 x 300	12.5	✓		128.00	8		1	
400 x 300	16.0	✓		161.00	6		1	

Refer to notes on page 6

we'll see it through



## 1.1.3 RECTANGULAR HOLLOW SECTIONS (RHS) - NON STANDARD

							
Section: Rectangular (RHS) Standard - Grade: AS/NZS 1163 - C350L0 Surface Finish: PTD / ALLGAL / OILED / NOPC*							
Size dxb (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack	Lengths / MiniPak
		PTD	ALLGAL				
<b>8000mm Lengths Standard</b>							
38 x 25	1.6	✓	✓	1.45	689	72	36
38 x 25	2.0	✓	✓	1.77	564	72	36
38 x 25	2.5	✓		2.15	465	72	36
50 x 20	1.6	✓	✓	1.63	615	96	48
50 x 20	2.0	✓	✓	1.99	502	96	48
50 x 20	2.5	✓		2.42	412	72	36
50 x 20	3.0	✓	✓	2.83	353	72	36
50 x 30	2.0	✓	✓	2.31	434	96	
50 x 30	2.5	✓		2.82	355	48	
50 x 40	2.0	✓		2.62	382	90	
76 x 38	1.6		✓	2.73	366	50	
76 x 38	2.0	✓	✓	3.37	296	56	
76 x 38	2.5	✓	✓	4.15	241	45	
76 x 38	3.0	✓		4.90	204	40	20
76 x 38	4.0	✓		6.23	161	32	20
80 x 40	1.6	✓		2.88	347	36	18
80 x 40	2.5	✓		4.39	228	36	18
102 x 76	3.5	✓	✓	9.07	110	20	9
102 x 76	5.0	✓		12.51	80	15	9
102 x 76	6.0	✓		14.67	68	12	
127 x 51	2.0	✓		5.38	186	27	
127 x 51	2.5	✓		6.66	150	27	
127 x 51	3.0	✓		7.92	126	18	
127 x 51	3.5	✓		9.07	110	9	
127 x 51	4.0	✓		10.24	98	12	
127 x 51	5.0	✓	✓	12.51	80	12	6
127 x 51	6.0	✓		14.67	68	9	6
152 x 76	3.5	✓		11.81	85	12	6
152 x 76	5.0	✓		16.44	61	12	6
152 x 76	6.0	✓		19.38	52	9	6

**NOTE:**


- Minimum order quantities (MOQ's) apply.
- C450L0 grade available for some sizes subject to enquiry. Minimum order quantities (MOQ's) apply.
- NOPC & OILED available subject to enquiry.

\* Refer to Glossary of Terms

# 1.1.4 CIRCULAR HOLLOW SECTIONS (CHS) - AS/NZS 1163 & AS 1074

1

1.1.3 Circular Hollow Sections (CHS) - AS/NZS 1163 & AS 1074



Section: Pipe (CHS)  
 Standard : AS/NZS 1163 & AS 1074  
 Surface Finish: PTD / ALLGAL / OILED / NOPC\*

NB (mm)	d <sub>o</sub> (mm)	Nom. Thick (mm)	Class AS1074	Grade		Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre / Tonne	Lengths / Pack	Lengths / MiniPak
				C250L0	C350L0	PTD	ALLGAL				
<b>6500mm Lengths Standard</b>											
	25.4	2.0	XL		❖		✓	1.15	866	91	
20	26.9	2.0	XL	✓	❖	✓	✓	1.23	814	127	61
20	26.9	2.3	L	✓	❖	✓	✓	1.40	717	127	61
20	26.9	2.6	M	✓		✓	✓	1.56	642	127	61
20	26.9	3.2	H	✓		✓		1.87	535	127	61
25	33.7	2.0	XL	✓	❖	✓	✓	1.56	640	91	37
25	33.7	2.6	L	✓	❖	✓	✓	1.99	501	91	37
25	33.7	3.2	M	✓		✓	✓	2.41	415	91	37
25	33.7	4.0	H	✓		✓	✓	2.93	341	91	37
32	42.4	2.0	XL	✓	❖	✓	✓	1.99	502	61	37
32	42.4	2.6	L	✓	❖	✓	✓	2.55	392	61	37
32	42.4	3.2	M	✓		✓	✓	3.09	323	61	37
32	42.4	4.0	H	✓		✓	✓	3.79	264	61	37
40	48.3	2.3	XL		❖	✓	✓	2.61	383	61	37
40	48.3	2.9	L	✓	❖	✓	✓	3.25	308	61	37
40	48.3	3.2	M	✓		✓	✓	3.56	281	61	37
40	48.3	4.0	H	✓	❖	✓	✓	4.37	229	61	37
50	60.3	2.3	XL	✓	❖	✓	✓	3.29	304	37	19
50	60.3	2.9	L	✓	❖	✓	✓	4.11	244	37	19
50	60.3	3.6	M	✓	❖	✓	✓	5.03	199	37	19
50	60.3	4.5	H	✓	❖	✓	✓	6.19	161	37	19
65	76.1	2.3	XL	✓	❖	✓	✓	4.19	239	37	19
65	76.1	3.2	L	✓	❖	✓	✓	5.75	174	37	19
65	76.1	3.6	M	✓	❖	✓	✓	6.44	155	37	19
65	76.1	4.5	H	✓	❖	✓	✓	7.95	126	37	19
80	88.9	2.6	XL		❖	✓	✓	5.53	181	19	10
80	88.9	3.2	L	✓	❖	✓	✓	6.76	148	19	10
80	88.9	4.0	M	✓	❖	✓	✓	8.38	119	19	10
80	88.9	5.0	H	✓	❖	✓	✓	10.35	97	19	10
90	101.6	2.6	XL		❖	✓	✓	6.35	158	19	10
90	101.6	3.2	L		❖	✓	✓	7.77	129	19	10
90	101.6	4.0	M	✓	❖	✓	✓	9.63	104	19	10
90	101.6	5.0	H	✓	❖	✓	✓	11.91	84	19	10
100	114.3	2.6			❖	✓	✓	7.16	140	19	10
100	114.3	3.2	XL		❖	✓	✓	8.77	114	19	10
100	114.3	3.6	L	✓	❖	✓	✓	9.83	102	19	10
100	114.3	4.5	M	✓	❖	✓	✓	12.19	82	19	10
100	114.3	5.4	H	✓	❖	✓		14.50	69	19	10

Table continues over page


we'll see it through



## 1.1.4 CIRCULAR HOLLOW SECTIONS (CHS) - AS/NZS 1163 & AS 1074 CONT...

1

1.1.4 Circular Hollow Sections (CHS) - AS/NZS 1163 & AS 1074



Section: Pipe (CHS)  
Standard: AS/NZS 1163 & AS 1074  
Surface Finish: PTD / ALLGAL / OILED / NOPC\*


NB (mm)	d <sub>o</sub> (mm)	Nom. Thick (mm)	Class AS1074	Grade		Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre / Tonne	Lengths / Pack	Lengths / MiniPack
				C250L0	C350L0	PTD	ALLGAL				
<b>6500mm Lengths Standard</b>											
125	139.7	3.0	XL	✓	❖	✓	✓	10.11	99	13	7
125	139.7	3.5	L		❖	✓	✓	11.76	85	13	7
125	139.7	5.0	M	✓	❖	✓	✓	16.61	60	13	7
125	139.7	5.4	H	✓	❖	✓		17.89	56	13	7
150	165.1	3.0	XL		❖	✓	✓	11.99	83	10	7
150	165.1	3.5	L		❖	✓	✓	13.95	72	10	7
150	165.1	5.0	M	✓	❖	✓	✓	19.74	51	10	7
150	165.1	5.4	H	✓		✓		21.27	47	10	7

**NOTE:**

- (❖) Denotes tensile strength exceeds AS 1074 specification.
- Non standard sizes, surface finishes and lengths available subject to enquiry. Minimum order quantities (MOQ's) apply.
- C450L0 grade for some sizes available subject to enquiry. Minimum order quantities (MOQ's) apply.
- NOPC & OILED available subject to enquiry.
- Pipe to be used for low pressure water/gas reticulation are manufactured to meet AS 1074.

\* Refer to Glossary of Terms

## 1.1.5 CIRCULAR HOLLOW SECTIONS (CHS) - AS/NZS 1163 & API 5L




Section: Pipe (CHS)  
Standard: AS/NZS 1163 & API 5L  
Surface Finish: PTD BLACK / OILED / NOPC\*

d <sub>o</sub> (mm)	Nom. Thick (mm)	Surface Finish	Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack
		PTD BLACK			
<b>12000mm Lengths Standard</b>					
88.9	5.5	✓	11.31	88	19
88.9	7.6	✓	15.24	66	19
114.3	4.8	✓	12.96	77	10
114.3	6.0	✓	16.02	62	10
114.3	8.6	✓	22.42	45	10
141.3	4.8	✓	16.16	62	13
141.3	6.6	✓	21.92	46	13
141.3	9.5	✓	30.88	32	13
168.3	4.8	✓	19.35	52	7
168.3	6.4	✓	25.55	39	7
168.3	7.1	✓	28.22	35	7
168.3	11.0	✓	42.67	23	1

Table continues over page

## 1.1.5 CIRCULAR HOLLOW SECTIONS (CHS) - AS/NZS 1163 & API 5L CONT...



Section: Pipe (CHS)  
 Standard: AS/NZS 1163 & API 5L  
 Surface Finish: PTD BLACK / OILED / NOPC\*

1

1.1.3 Circular Hollow Sections (CHS) - AS/NZS 1163 & API 5L

d <sub>o</sub> (mm)	Nom. Thick (mm)	Surface Finish	Nom. Linear Mass (Kg/m)	Nom. Mtre/ Tonne	Lengths / Pack
		PTD BLACK			
<b>12000mm Lengths Standard</b>					
219.1	4.8	✓	25.37	39	1
219.1	6.4	✓	33.57	30	1
219.1	8.2	✓	42.65	23	1
219.1	12.7	✓	64.64	15	1
273.1	4.8	✓	31.76	31	1
273.1	6.4	✓	42.09	24	1
273.1	9.3	✓	60.50	17	1
273.1	12.7	✓	81.55	12	1
323.9	4.8	✓	37.77	26	1
323.9	6.4	✓	50.11	20	1
323.9	9.5	✓	73.65	14	1
323.9	12.7	✓	97.41	10	1
355.6	6.4	✓	55.11	18	1
355.6	9.5	✓	81.08	12	1
355.6	12.7	✓	107.39	9	1
406.4	6.4	✓	63.13	16	1
406.4	9.5	✓	92.98	11	1
406.4	12.7	✓	123.30	8	1
457.0	4.8	✓	53.53	19	1
457.0	6.4	✓	71.12	14	1
457.0	9.5	✓	104.84	10	1
457.0	12.7	✓	139.15	7	1
508.0	6.4	✓	79.16	13	1
508.0	9.5	✓	116.78	9	1
508.0	12.7	✓	155.12	6	1
610.0	6.4	✓	95.26	10	1
610.0	9.5	✓	140.68	7	1
610.0	12.7	✓	186.06	5	1

### NOTE:

- Non standard sizes, surface finishes and lengths available subject to enquiry. Minimum order quantities (MOQ's) apply.
- API bevel ends are standard.
- Stock lengths are 12 metres.
- Project supply subject to enquiry.
- NOPC & OILED available subject to enquiry.



\* Refer to Glossary of Terms

we'll see it through




11

# Precision Tube



## 1.2.1 PRECISION SQUARE TUBE



Section: Square Tube  
 Standard - Grade: AS 1450  
 Surface Finish: SEMB / MSGB / MSBL\*


Size dxb (mm)	Gauge	Surface Finish			Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB	MSBL		
<b>6100mm &amp; 7320 Lengths Standard</b>						
12.7 x 12.7	1.2		✓		0.404	400
12.7 x 12.7	1.6	✓			0.506	400
16 x 16	0.9		✓		0.410	256
16 x 16	1.0		✓		0.451	256
16 x 16	1.2		✓		0.529	256
16 x 16	1.6	✓			0.672	256
19 x 19	0.9		✓		0.495	169
19 x 19	1.2	✓			0.642	169
19 x 19	1.4	✓			0.734	169
19 x 19	1.6	✓	✓	✓	0.822	169
19 x 19	2.0	✓			0.987	169
19 x 19	2.5			✓	1.169	169
20 x 20	1.2		✓		0.679	144
20 x 20	1.6	✓	✓		0.873	144
22.2 x 22.2	0.9	✓	✓		0.586	121
22.2 x 22.2	1.2	✓	✓		0.762	121
22.2 x 22.2	1.4	✓			0.875	121
22.2 x 22.2	1.6	✓	✓		0.983	121
25.4 x 25.4	1.2	✓	✓		0.883	100
25.4 x 25.4	1.4	✓			1.015	100
25.4 x 25.4	1.5		✓		1.080	100
25.4 x 25.4	1.6		✓	✓	1.144	100
25.4 x 25.4	2.0			✓	1.389	100
25.4 x 25.4	2.5			✓	1.671	100
25 x 25	1.2	✓			0.868	100
25 x 25	1.4	✓			0.998	100
25 x 25	1.6	✓	✓		1.124	100
30 x 30	1.2	✓	✓		1.056	64
30 x 30	1.5		✓		1.297	64
30 x 30	1.6		✓		1.375	64
31.8 x 31.8	1.2	✓	✓		1.124	64
31.8 x 31.8	1.6		✓	✓	1.465	64
31.8 x 31.8	2.0			✓	1.791	64

Table continues over page

## 1.2.1 PRECISION SQUARE TUBE CONT...

1

1.2.1 Precision Square Tube



Section: Square Tube  
 Standard - Grade: AS 1450  
 Surface Finish: SEMB / MSGB / MSBL\*

Size dxb (mm)	Gauge	Surface Finish			Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB	MSBL		
<b>6100mm &amp; 7320 Lengths Standard</b>						
31.8 x 31.8	2.5			✓	2.174	64
35 x 35	1.2	✓	✓		1.244	49
35 x 35	1.5		✓		1.532	49
35 x 35	1.6			✓	1.626	49
35 x 35	2.0			✓	1.992	49
38 x 38	1.6	✓	✓	✓	1.777	49
38 x 38	2.0			✓	2.180	49
38 x 38	2.5			✓	2.660	49
40 x 40	1.2		✓		1.433	32
40 x 40	1.5		✓		1.768	32
40 x 40	1.6		✓	✓	1.877	32
40 x 40	2.0		✓		2.306	32
40 x 40	2.5			✓	2.817	32
41 x 41	2.0		✓		2.368	36
45 x 45	1.6		✓	✓	2.129	36
45 x 45	2.5			✓	3.210	36
50 x 50	1.2		✓		1.810	25
50 x 50	1.5		✓		2.239	25
50 x 50	1.6	✓	✓		2.380	25
50 x 50	2.0		✓	✓	2.934	25
50 x 50	2.5			✓	3.602	25
50 x 50	3.0			✓	4.245	25
60 x 60	1.6	✓	✓		2.882	12
65 x 65	1.5		✓		2.945	16
65 x 65	1.6		✓		3.133	16
65 x 65	2.0			✓	3.876	16
65 x 65	2.5		✓		4.780	16


**NOTE:**

- Non standard lengths available subject to enquiry.
- Other coatings available include - HTGB, HRSB, HRGB, HRPO, GALVANSIED\*. These sections may not be available in these coatings. Please contact Orrcon Steel for availability.
- The products listed are indicative of the range but you need to check with the local branch for availability & minimum order quantities (MOQ's).

\* Refer to Glossary of Terms



## 1.2.2 PRECISION RECTANGULAR TUBE



Section: Rectangluar Tube  
 Standard - Grade: AS 1450  
 Surface Finish: SEMB / MSGB / MSBL\*


Size dxb (mm)	Gauge	Surface Finish			Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB	MSBL		
<b>6100mm &amp; 7320 Lengths Standard</b>						
12 x 9	1.2	✓			0.395	560
25.4 x 12.7	0.9		✓		0.497	200
25.4 x 12.7	1.0		✓		0.547	200
25.4 x 12.7	1.2	✓			0.643	200
25.4 x 12.7	1.6		✓		0.825	200
30 x 15	0.9		✓		0.594	128
31.8 x 12.7	1.6	✓			0.986	160
35 x 19	1.0		✓	✓	0.796	96
35 x 19	1.2	✓			0.943	96
35 x 19	1.6	✓	✓	✓	1.224	96
35 x 19	2.0			✓	1.489	96
38 x 25.4	1.2		✓		1.120	70
38 x 25.4	1.5		✓		1.377	70
38 x 25.4	1.6		✓	✓	1.460	70
50 x 10	0.9		✓		0.806	85
50 x 10	1.2	✓			1.056	85
50 x 10	1.6	✓			1.375	85
50 x 20	1.6	✓			1.626	60
50 x 20	2.0			✓	1.992	60
50 x 25	0.9		✓		1.018	50
50 x 25	1.2		✓		1.339	50
50 x 25	1.6	✓	✓		1.752	50
50 x 25	2.0			✓	2.149	50
50 x 25	2.5			✓	2.621	50
50 x 40	1.6	✓			2.129	30
51 x 31.8	1.6	✓			1.948	40
51 x 31.8	2.0	✓			2.393	40
57 x 35	1.6		✓	✓	2.179	28
57 x 35	2.0			✓	2.682	28
57 x 35	2.5			✓	3.288	28
60 x 30	2.5			✓	3.210	32
60 x 40	1.6	✓			2.380	24
60 x 40	3.0			✓	4.245	24
63.5 x 38	1.6		✓		2.418	28
63.5 x 38	2.0			✓	2.981	28

Table continues over page

we'll see it through



## 1.2.2 PRECISION RECTANGULAR TUBE CONT...



Section: Rectangular Tube  
 Standard - Grade: AS 1450  
 Surface Finish: SEMB / MSGB / MSBL\*


Size dxb (mm)	Gauge	Surface Finish			Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB	MSBL		
<b>6100mm &amp; 7320 Lengths Standard</b>						
67 x 29	2.0	✓			2.808	36
70 x 34	2.3	✓			3.482	28
70 x 50	1.2		✓		2.186	20
75 x 25	2.0			✓	2.934	30
76 x 38	1.2		✓		2.073	18
76 x 38	1.6		✓		2.732	18
76 x 38	2.0		✓		3.373	18
80 x 40	1.6		✓	✓	2.882	18
80 x 40	2.5			✓	4.387	18
90 x 40	2.5			✓	4.780	18

**NOTE:**

- Non standard lengths available subject to enquiry.
- Other coatings available include - HTGB, HRSB, HRGB, HRPO, GALVANSIED\*. These sections may not be available in these coatings. Please contact Orrcon Steel for availability.
- The products listed are indicative of the range but you need to check with the local branch for availability & minimum order quantities (MOQ's).

\* Refer to Glossary of Terms

## 1.2.3 PRECISION ROUND TUBE



Section: Round Tube  
 Standard - Grade: AS 1450  
 Surface Finish: SEMB / MSGB / MSBR / MSBL / ACMS\*

Size dxb (mm)	Gauge	Surface Finish					Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB	MSBR	MSBL	ACMS		
<b>6100mm &amp; 7320 Lengths Standard</b>								
12.7	0.9		✓	✓			0.262	270
12.7	1.2	✓					0.340	270
12.7	1.6	✓					0.438	270
16.0	0.9			✓			0.335	217
16.0	1.2	✓	✓				0.438	217
16.0	1.6	✓	✓				0.568	217
16.0	2.0	✓					0.691	217
19.0	0.9		✓	✓			0.402	169
19.0	1.2	✓	✓			✓	0.527	169
19.0	1.4	✓					0.608	169
19.0	1.6	✓	✓		✓		0.687	169
19.0	2.0	✓			✓		0.838	169
19.0	2.5		✓				1.017	169
22.2	0.9	✓	✓				0.473	127
22.2	1.2	✓					0.621	127
22.2	1.4	✓					0.718	127
22.2	1.6	✓					0.813	127
25.4	0.9		✓				0.544	91
25.4	1.0						0.601	91
25.4	1.2	✓		✓			0.716	91
25.4	1.4	✓					0.829	91
25.4	1.6	✓	✓		✓		0.939	91
25.4	2.0	✓	✓		✓		1.154	91
28.6	1.2	✓	✓				0.811	61
28.6	1.6	✓	✓				1.065	61
31.8	1.2	✓					0.906	61
31.8	1.6	✓	✓		✓	✓	1.192	61
31.8	2.0	✓			✓		1.470	61
35.0	1.2	✓	✓			✓	1.000	61
35.0	1.6	✓					1.318	61
38.0	1.2		✓			✓	1.089	61
38.0	2.0	✓			✓		1.776	37
38.0	2.5				✓		2.189	37
38.0	3.0				✓		2.589	37
41.3	1.2	✓	✓				1.187	37

Table continues over page


we'll see it through



## 1.2.3 PRECISION ROUND TUBE CONT...

1

1.2.3 Precision Round Tube



Section: Round Tube  
 Standard - Grade: AS 1450  
 Surface Finish: SEMB / MSGB / MSBR / MSBL / ACMS\*


Size dxb (mm)	Gauge	Surface Finish					Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB	MSBR	MSBL	ACMS		
<b>6100mm &amp; 7320 Lengths Standard</b>								
41.3	1.6	✓	✓			✓	1.566	37
44.5	1.2	✓	✓			✓	1.281	68
44.5	1.6	✓	✓			✓	1.693	68
44.5	2.0				✓		2.097	37
44.5	2.5				✓		2.589	37
47.6	1.2	✓					1.373	37
47.6	1.6	✓				✓	1.815	19
47.6	2.0	✓					2.249	19
51.0	1.2	✓	✓			✓	1.474	19
51.0	1.4	✓					1.712	53
51.0	1.6	✓	✓		✓	✓	1.949	19
51.0	2.0	✓	✓				2.417	19
51.0	2.5		✓		✓		2.990	19
54.0	1.2		✓				1.562	19
54.0	1.6	✓				✓	2.068	19
57.0	1.2	✓	✓				1.651	19
57.0	1.6	✓	✓			✓	2.186	19
57.0	2.0	✓			✓	✓	2.713	19
60.3	1.6		✓			✓	2.316	19
63.5	1.6	✓				✓	2.442	19
63.5	2.0	✓			✓	✓	3.033	19
70.0	1.6	✓					2.698	19
76.2	1.6	✓				✓	2.944	19
76.2	2.0					✓	3.660	19
85.0	1.6					✓	3.290	7
90.0	1.6	✓				✓	3.488	7

**NOTE:**

- Non standard lengths available subject to enquiry.
- Other coatings available include - HTGB, HRSB, HRGB\*. These sections may not be available in these coatings. Please contact Orrcon Steel for availability.
- The products listed are indicative of the range, however you need to check with the local branch for availability and minimum order quantities (MOQ's).

\* Refer to Glossary of Terms

## 1.2.4 PRECISION OVAL TUBE



Section: Oval Tube  
Standard - Grade: AS 1450  
Surface Finish: SEMB / MSGB / MSBR\*

Size dxb (mm)	Flat / Oval Side	Gauge	Surface Finish			Nom. Linear Mass (Kg/m)	Lengths Per Pack
			SEMB	MSGB	MSBR		
<b>6100mm &amp; 7320 Lengths Standard</b>							
30 x 15	OV	2.0	✓			1.152	128
31.8 x 16	FS	1.2			✓	0.740	128
31.8 x 16	FS	1.6			✓	0.998	128
31.8 x 17.5	OV	1.6	✓			0.940	96
31.8 x 17.5	OV	2.0	✓			1.196	120
35 x 15	OV	2.0	✓			1.312	128
37.7 x 20.7	FS	1.6	✓			1.237	84
51 x 16	FS	1.2	✓			1.114	80
51 x 16	FS	1.6	✓			1.476	80
61.8 x 29.6	OV	1.6		✓		1.858	48
75 x 16	FS	1.0		✓		1.334	48

### NOTE:

- Non standard lengths available subject to enquiry.
- Other coatings available include - HTGB, HRSB, HRGB, HRPO, GALVANISED\*. These sections may not be available in these coatings. Please contact Orrcon Steel for availability
- The products listed are indicative of the range, however you need to check with the local branch for availability and minimum order quantities (MOQ's).

\* Refer to Glossary of Terms

## 1.2.5 PRECISION SPECIAL SHAPES

Section: Special Shapes  
Standard - Grade: AS 1450  
Surface Finish: SEMB / MSGB\*

Size dxb (mm)	Gauge	Surface Finish		Nom. Linear Mass (Kg/m)	Lengths Per Pack
		SEMB	MSGB		
<b>6100mm &amp; 7320 Lengths Standard</b>					
50.8 H/RAIL	1.6		✓	1.941	30
50 x 50 30-25	1.6		✓	2.470	25
50 x 50 30-25	2.0	✓		2.907	25
50 x 50 x 68.6	1.6	✓		2.006	25

### NOTE:


- Non standard lengths available subject to enquiry.
- Other coatings available include - HTGB, HRSB, HRGB, HRPO, GALVANISED\*. These sections may not be available in these coatings. Please contact Orrcon Steel for availability.
- The products listed are indicative of the range but you need to check with the local branch for availability and minimum order quantities (MOQ's).

\* Refer to Glossary of Terms

we'll see it through



## 1.3 YARD RAIL




Section: Yard Rail  
Standard: AS/NZS 1163 - C350L0  
Surface Finish: PTD / ALLGAL

Size dxb (mm)	Nom. Thick (mm)	Surface Finish		Nom. Linear Mass (Kg/m)	Nom. Mtre/Tonne	Lengths / Pack	MiniPack
		PTD	ALLGAL				
<b>Flat Sided Oval (Rail) 6100mm Lengths Standard</b>							
52 x 25	1.6	✓	✓	1.61	621	48	
52 x 25	2.0	✓	✓	1.99	503	48	
53 x 35	1.6	✓	✓	1.84	543	48	
59 x 30	1.6	✓	✓	1.84	543	48	
59 x 30	2.0	✓	✓	2.28	439	48	
66 x 44	1.6	✓	✓	2.32	431	25	
66 x 44	2.0	✓	✓	3.22	311	25	
75 x 40	1.6	✓	✓	2.46	407	20	
75 x 40	2.0	✓	✓	2.99	334	20	
75 x 40	2.5	✓	✓	3.60	278	32	
85 x 48	3.2	✓	✓	6.08	164	28	
97 x 42	2.0	✓	✓	3.65	274	21	
97 x 42	2.5	✓	✓	4.53	221	21	
108 x 38	2.0	✓	✓	3.85	260	21	
115 x 42	2.0	✓	✓	4.27	234	21	
115 x 42	2.5	✓	✓	5.33	188	21	
124 x 42	2.0	✓	✓	4.50	222	21	
<b>Flat Sided Round (Post) 6100mm Lengths Standard</b>							
62 x 50	2.0	✓	✓	2.88	348	25	
80 x 61	2.0	✓	✓	3.65	274	25	

### NOTE:

- Non standard sizes, surface finishes and lengths available, subject to enquiry.
- Minimum order quantities (MOQ's) apply.

## 1.4 SILO SECTIONS




Section: Silo Sections  
Standard: AS/NZS 1163 - C350L0  
Surface Finish: ALLGAL

Size dxb (mm)	Nom. Thick (mm)	Surface Finish	Nom. Linear Mass (Kg/m)	Nom. Mtre/Tonne	Lengths / Pack	MiniPack
		ALLGAL				
<b>12000mm Lengths Standard</b>						
75 x 64	2.5	✓	4.58	218	24	
75 x 64	3.0	✓	5.46	183	24	

### NOTE:

- Non standard surface finishes and lengths available, subject to enquiry.
- Minimum order quantities (MOQ's) apply.

## 1.5 HOT DIPPED GALVANISED PIPE



Section: HDG Pipe  
Standards Grade: AS 4792, AS 1450 - C200  
Surface Finish: Galvanised


Size	OD (mm)	Class	Nom Thickness	Lengths /Bundle	kg/m	Lengths	Mass /Bundle
<b>6500mm Lengths Standard</b>							
15NB	21.3	M	2.6	91	1.20	6500	0.71
20NB	26.9	XL	2.0	91	1.23	6500	0.73
20NB	26.9	XL	2.0	91	1.23	7200	0.80
20NB	26.9	L	2.3	91	1.40	6500	0.83
20NB	26.9	M	2.6	91	1.56	6500	0.92
20NB	26.9	H	3.2	91	1.87	6500	1.11
25NB	33.7	XL	2.0	91	1.56	6500	0.924
25NB	33.7	XL	2.0	91	1.56	7200	1.024
25NB	33.7	L	2.6	91	1.99	6500	1.18
25NB	33.7	M	3.2	91	2.41	6500	1.42
25NB	33.7	H	4.0	91	2.93	6500	1.73
32NB	42.4	XL	2.0	61	1.99	6500	0.790
32NB	42.4	XL	2.0	61	1.99	7200	0.875
32NB	42.4	L	2.6	61	2.55	6500	1.011
32NB	42.4	M	3.2	61	3.09	6500	1.23
32NB	42.4	H	4.0	61	3.79	6500	1.50
40NB	48.3	XL	2.3	61	2.61	6500	1.03
40NB	48.3	XL	2.3	61	2.61	7200	1.15
40NB	48.3	L	2.9	61	3.25	6500	1.29
40NB	48.3	L	2.9	61	3.25	7200	1.43
40NB	48.3	M	3.2	61	3.56	6500	1.41
40NB	48.3	M	3.2	61	3.56	7200	1.56
40NB	48.3	H	4.0	61	4.37	6500	1.73
50NB	60.3	XL	2.3	37	3.29	6500	0.791
50NB	60.3	XL	2.3	37	3.29	7200	0.876
50NB	60.3	L	2.9	37	4.10	6500	0.987
50NB	60.3	M	3.6	37	5.03	6500	1.210
50NB	60.3	H	4.5	37	6.19	6500	1.489
65NB	76.1	XL	2.3	37	4.18	6500	1.01
65NB	76.1	L	3.2	37	5.75	6500	1.38
65NB	76.1	M	3.6	37	6.43	6500	1.55
65NB	76.1	H	4.5	37	7.94	6500	1.91

Table continues over page

## 1.5 HOT DIPPED GALVANISED PIPE CONT...

1

1.5 Hot Dipped Galvanised Pipe



Section: HDG Pipe  
Standards Grade: AS 4792, AS 1450 - C200  
Surface Finish: Galvanised

Size	OD (mm)	Class	Nom Thickness	Lengths /Bundle	kg/m	Lengths	Mass /Bundle
<b>6500mm Lengths Standard</b>							
80NB	88.9	XL	2.6	19	5.53	6500	0.683
80NB	88.9	L	3.2	19	6.76	6500	0.835
80NB	88.9	M	4.0	19	8.37	6500	1.034
80NB	88.9	H	5.0	19	10.34	6500	1.277
90NB	101.6	XL	2.6	19	6.34	6500	0.784
90NB	101.6	L	3.2	19	7.76	6500	0.959
90NB	101.6	M	4.0	19	9.62	6500	1.188
90NB	101.6	H	5.0	19	11.91	6500	1.470
100NB	114.3	XL	3.2	19	8.76	6500	1.08
100NB	114.3	L	3.6	19	9.82	6500	1.21
100NB	114.3	M	4.5	19	12.18	6500	1.50
100NB	114.3	H	5.4	19	14.50	6500	1.79
125NB	139.7	XL	3.0	13	10.11	6500	0.854
125NB	139.7	L	3.5	13	11.75	6500	0.993
125NB	139.7	M	5.0	13	16.60	6500	1.403
125NB	139.7	H	5.4	13	17.88	6500	1.511
150NB	165.1	XL	3.0	10	11.99	6500	0.779
150NB	165.1	L	3.5	10	13.94	6500	0.906
150NB	165.1	M	5.0	10	19.73	6500	1.283
150NB	165.1	H	5.4	10	21.26	6500	1.382

**NOTE:**

- Non standard lengths are available, subject to enquiry.



## 1.6 TUBE & PIPE INFORMATION

### 1.6.1 STRUCTURAL TUBE & PIPE INFORMATION

#### Manufacturing Standards

Orrcon Steel products are manufactured by Cold Forming and Electric Resistance Welding (ERW) and are tested to meet the following Australian Standards:

#### STRUCTURAL

Hollow sections to be used for structural purposes are manufactured to meet:

- AS/NZS 1163 - Structural Steel Hollow Sections (Grades C250, C350, C450, C250L0, C350L0, & C450L0).

#### COATINGS & SURFACE FINISHES

Electrogalvanized coating applied to ALLGAL hollow sections complies to the following standard:

- AS 4750 - Electrogalvanized (zinc) coatings on ferrous hollow sections.

#### CURRENT SURFACE FINISHES

- SMARTCOTE™ - Painted blue/black water based acrylic primer.
- ALLGAL™ - Electro-galvanised internal and external surface coating.
- ALLGAL™PCQ - Powder coat quality - no tube mark, oiled.
- HOT DIPPED GALVANISED - Internal & external surface coating.
- OILED - lightly oiled for short term corrosion protection.
- NOPC - No oil, paint or coating.

#### ORRCON STEEL BROADSPEC® API LINEPIPE

Orrcon Steel BroadSpec® linepipe covers the following Australian and International standards:

- API 5L X 42 PSL2.
- ASTM A53 Grades A & B.
- AS/NZS 1163 Grade C350L0.
- Broadspec® meets the design rules as specified in AS 4041, AS 2118/4118 and AS 1579.

#### WELDLINE LOCATION (NON-CIRCULAR TUBE)

Where weldline location is specified, appropriate gauging shall be determined by agreement.

#### INTERNAL FITMENTS

Where internal fitments are specified appropriate gauging shall be determined by agreement.

### Standard Mechanical Properties - Structural Tube & Pipe

Standard	Grade*	Yield Strength MPa (min)	Tensile Strength MPa (min)	CHS			RHS & SHS		
				<15	15-30	>30	<15	15-30	>30
AS1163	C250 / C250L0	250	320	18	20	22	14	16	18
	C350 / C350L0	350	430	16	18	20	12	14	16
	C450 / C450L0	450	500	12	14	16	10	12	14


\*L0 designation indicates guaranteed impact strength properties at 0°C

we'll see it through




## 1.6.1 STRUCTURAL TUBE & PIPE INFORMATION

### Standard Tolerances - Structural Tube & Pipe

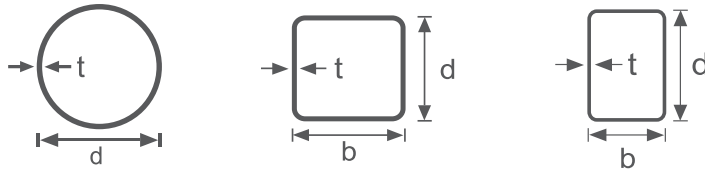

AS1163		Dimensional Tolerances	
Characteristic		Pipe (CHS)	Rectangular & Square (RHS / SHS)
External dimensions [d, b, d <sub>o</sub> ]		±1% with minimum of ±0.5mm & maximum ±10%	±1% with minimum of ±0.5mm
Thickness (t)	d ≤ 406.4mm	±10%	±10%
	d > 406.4mm	±10% with max of ±2mm	
All Sections			
Mass		Not less than 96% of specified nominal mass	

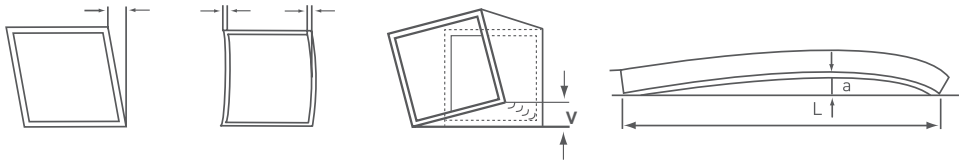

AS1163		Shape Tolerances	
Characteristic		All Sections	
Corner Radius	≤ 50x50mm equivalent perimeter	1.5t to 3t	
	> 50x50mm equivalent perimeter	1.8t to 3t	
Twist (v)		≤ 2mm ± 0.5mm/m length	
Concavity / Convexity		Max 0.8% or 0.5mm, whichever is greater	
Squareness		90 ± 1°	
		Pipe (CHS)	Rectangle & Square (RHS/SHS)
Straightness		0.20% of total length	0.15% of total length

## PROCESSING & SERVICES

### PROCESSING

Please note Orrcon Steel offers processing options including laser tube cutting, pack cutting, pipe threading, shouldering and roll grooving. Not all processing is available at all locations. Please contact Orrcon Steel for further information.

### JET ROLLING

Rolling of product outside the normal schedule. Minimum order quantities (MOQ's) apply.

## 1.6.1 STRUCTURAL TUBE & PIPE INFORMATION CONT...

### MINIPAKS®

- Retain current stock level but increase stock range.
- Easier to handle, store and transport.
- Increase customer stock turns.
- Reduced costs = increased profits.
- Now available in pipe.
- Comes in ALLGAL® and painted finishes in most sizes.

Note: Special length MiniPaks available ex-rolling. Minimum order quantities (MOQ's) apply.

## Special Requirements & Non Standard Products

If you have special requirements which are not in our standard range, Orrcon Steel has flexible mill options that may meet your requirements. Some of the services we offer include variations to standard mill lengths, other section sizes, variable grades, chemical composition, and mechanical properties, exact cut lengths, restricted tolerances, other surface finishes & thicknesses. After assessing the shape/section and tooling cost we can then determine the cost to produce the special product. Please contact Orrcon Steel for further information. Minimum order quantities (MOQ's) may apply.

## 1.6.2 PRECISION TUBE INFORMATION

### Manufacturing Standards

Orrcon Steel products are manufactured by cold forming and electric resistance welding and are tested to meet the following Australian Standards:

#### MECHANICAL

Hollow sections used for mechanical purposes are manufactured to meet:

- AS 1450 - Steel Tubes for Mechanical Purposes (Grades C200 & C250 ERW).

### Standard Mechanical Properties - Precision Tube

Standard	Surface Finish	D/T Ratio	Yield Strength MPa (min)	Tensile Strength MPa (min)	Elong on $5.65\sqrt{S_0}$ % (min)
AS1450	Commercial Quality & Aluminium Coated	<15	300	310	15
		15 to 25	275	300	20
		<25 to 35	250	290	25
		< 35	200	280	30
	Zinc Coated		300	350	15

D = Outside diameter or equivalent round | t = nominal wall thickness |  $S_0$  = Cross Sectional Area


we'll see it through




25

## 1.6.2 PRECISION TUBE INFORMATION CONT...

### Standard Tolerances - Precision Tube

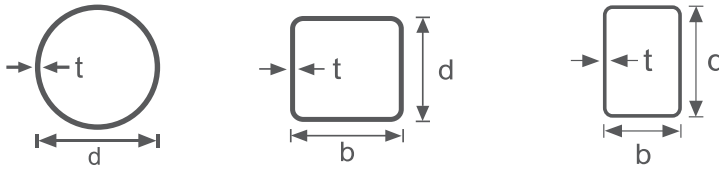

AS1450		Dimensional Tolerances	
Characteristic		Round	Rectangular & Square
Dimension (d, b, d <sub>o</sub> )	≤25mm	±0.15mm	±0.5mm
	>25 and ≤50	±0.20mm	
	>50 and ≤75	±0.30mm	±1%
	>75 and ≤100	±0.40mm	
Mass		Round, Rectangular & Square ±10%	

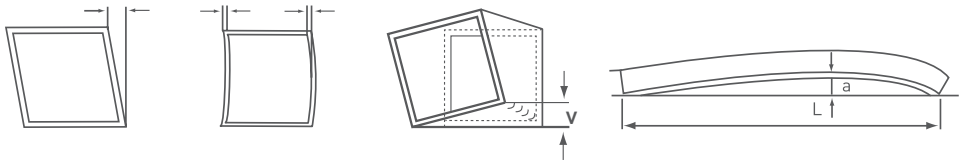

AS1450	Shape Tolerances
Characteristic	All Sections
Corner Radius	Max 3t
Twist (v)	< 2mm + 0.5mm/m length
Squareness	90 ± 1°
Straightness (a)	Shall not exceed: Mill Length(mm) / 600

## Surface Finishes

### COMMERCIAL QUALITY ERW STEEL TUBING

Standard tubing is manufactured from a range of steel strip types including cold rolled and hot rolled pickled and oiled. The strip has a matt finish, and after being polished in the tube rolling process the resulting surface finish is suitable in most applications.

Tubing is coated with a non-tacky rust preventative that is designed to withstand corrosion for at least three months when stored in normal, dry warehouse conditions. The tube can be welded without removal of the rust preventative.

## 1.6.2 PRECISION TUBE INFORMATION CONT...

### Surface Finishes

#### RUST PROTECTION

Rust preventative oil should be re-applied periodically where prolonged storage is required.

#### MSGB, HTGB, ACMS, ZINC AND ALUMINIUM COATED ERW STEEL TUBING

Tubing is manufactured from a range of Zinc and Aluminium coated steel strip types which are coated on both sides. The welded seam of the tube is recoated with a Zinc and Aluminium alloy to replace the material that the welding process has burnt away. Zinc coated tube is coated with a protective agent designed to withstand white rust when stored in normal, dry conditions. Aluminium coated tube is supplied without this protective agent.

The performance of Zinc coated steel is influenced by micro-environments, which vary from site to site. In corrosive environments it is recommended that a suitable barrier coating (eg paint or powder coating) be applied over the Zinc surface. This application should be in accordance with the supplier's recommendations with regard to surface pre-treatment, application, curing, and maintenance of the coating - refer to AS/NZS 2312 'Guide to the Protection of Iron Steel against Exterior Atmospheric Corrosion'.

#### MSBR – MILD STEEL BRIGHT

Finish – Has a bright finish and is typically used in the manufacture of products that require a higher grade surface finish such as electroplating or similar critical finish applications.

#### SEMB – SEMI BRIGHT

Finish – Typically has a steel grey appearance and suitable surface for general applications. Ideal where demanding and consistent properties are required.

#### HRSB – HOT ROLLED SEMI BRIGHT

Finish - Typically has a steel grey appearance and suitable surface for general applications. Ideal for paint or powder coated products.

#### MSBL – MILD STEEL BLACK


Finish - Has a black, mill finish.

### Special Requirements & Non Standard Products

If you have special requirements which are not in our standard range of Commercial Quality, Zinc coated or Aluminium coated products, Orrcon Steel is happy to assist. Some of the services we offer include different mill lengths, other section sizes, different grades, chemical composition, and mechanical properties, exact cut lengths, restricted tolerances, other surface finishes and coating thickness as well as perforating. Minimum order quantities (MOQ's) may apply.



# Hot Rolled Structural & Plate



# HOT ROLLED STRUCTURAL & PLATE

Orrcon Steel offers a complete range of Hot Rolled Structural Products, including beams, columns, channels, angles, merchant bar (flats, angles, rounds, squares) & plate.

## 2.1 SECTION TRANSLATION GUIDE

### Section Translation Guide – STG

Now you can replace open steel sections with hollow steel sections by a click of your mouse! The STG is a free web based software that allows you to compare structural steel hollow sections against hot-rolled open sections. It will assist you to get the best architectural effect, structural efficiency and cost savings for your designs and projects.

**The best part is it's a free resource.**

If you would like to access the STG, simply go to [www.sectiontranslation.com.au](http://www.sectiontranslation.com.au) and register.



## 2.2 UNIVERSAL BEAMS (UB)



Section: Universal Beams (UB)  
Standard: AS/NZS 3679.1 - 300MPa  
Surface Finish: Mill Finish

Size Specification (mm)	Weight (kg/m)	Metre/Tonne	Depth of Section	Flange (mm)		Web (mm)	
				Width	Thickness	Depth	Thickness
150 UB	14.0	71	150	75	7.0	136	5.0
	18.0	56	155	75	9.5	136	6.0
180 UB	16.1	62	173	90	7.0	159	4.5
	18.1	55	175	90	8.0	159	5.0
	22.2	45	179	90	10.0	159	6.0
200 UB	18.2	55	198	99	7.0	184	4.5
	22.3	45	202	133	7.0	188	5.0
	25.4	39	203	133	7.8	188	5.8
	29.8	34	207	134	9.6	188	6.3
250 UB	25.7	39	248	124	8.0	232	5.0
	31.4	32	252	146	8.6	234	6.1
	37.3	27	256	146	10.9	234	6.4
310 UB	32.0	31	298	149	8.0	282	5.5
	40.4	25	304	165	10.2	284	6.1
	46.2	22	307	166	11.8	284	6.7
360 UB	44.7	22	352	171	9.7	333	6.9
	50.7	20	356	171	11.5	333	7.3
	56.7	18	359	172	13.0	333	8.0
410 UB	53.7	19	403	178	10.9	381	7.6
	59.7	17	406	178	12.8	381	7.8
460 UB	67.1	15	454	190	12.7	428	8.5
	74.6	13	457	190	14.5	428	9.1
	82.1	12	460	191	16.0	428	9.9
530 UB	82.0	12	528	209	13.2	502	9.6
	92.4	11	533	209	15.6	502	10.2
610 UB	101.0	10	602	228	14.8	572	10.6
	113.0	9	607	228	17.3	572	11.2
	125.0	8	612	229	19.6	572	11.9

### UNIVERSAL BEAMS LENGTH MATRIX

Size Specification (mm)	9.0m	10.5m	12m	13.5m	15m	16.5m	18m
150 UB	✓	✓	✓	✓	✓	✓	
180 UB	✓	✓	✓	✓	✓	✓	
200 UB	✓	✓	✓	✓	✓	✓	✓
250 UB	✓	✓	✓	✓	✓	✓	✓
310 UB	✓	✓	✓	✓	✓	✓	✓
360 UB	✓	✓	✓	✓	✓	✓	✓



## 2.2 UNIVERSAL BEAMS (UB) CONT...

UNIVERSAL BEAMS LENGTH MATRIX							
Size Specification (mm)	9.0m	10.5m	12m	13.5m	15m	16.5m	18m
410 UB	✓	✓	✓	✓	✓	✓	✓
460 UB	✓	✓	✓	✓	✓	✓	✓
530 UB	✓	✓	✓	✓	✓	✓	✓
610 UB	✓	✓	✓	✓	✓	✓	✓

## 2.3 UNIVERSAL COLUMNS (UC)



Section: Universal Columns (UC)  
Standard: AS/NZS 3679.1 - 300MPa  
Surface Finish: Mill Finish

2

2.3 Universal Columns

Size Specification (mm)	Weight (kg/m)	Metre/Tonne	Depth of Section	Flange (mm)		Web (mm)	
				Width	Thickness	Depth	Thickness
100 UC	14.8	68	97	99	7.0	83	5.0
150 UC	23.4	43	152	152	6.8	139	6.1
	30.0	33	158	153	9.4	139	6.6
	37.2	27	162	154	11.5	139	8.1
200 UC	46.2	22	203	203	11.0	181	7.3
	52.2	19	206	204	12.5	181	8.0
	59.5	17	210	205	14.2	181	9.3
250 UC	72.9	14	254	254	14.2	225	8.6
	89.5	11	260	256	17.3	225	10.5
	137.0	7	321	309	21.7	277	13.8
310 UC	96.8	10	308	305	15.4	277	9.9
	118.0	8	315	307	18.7	277	11.9
	158.0	6	327	311	25.0	277	15.7

## UNIVERSAL COLUMNS LENGTH MATRIX

Size Specification (mm)	9.0m	10.5m	12m	13.5m	15m	16.5m	18m
100 UC	✓		✓		✓		
150 UC	✓	✓	✓	✓	✓	✓	
200 UC	✓	✓	✓	✓	✓	✓	✓
250 UC	✓	✓	✓	✓	✓	✓	✓
310 UC	✓	✓	✓	✓	✓	✓	✓

we'll see it through



31

## 2.4 PARALLEL FLANGE CHANNELS (PFC)



Section: Parallel Flange Channels (PFC)

Standard: AS/NZS 3679.1 - 300MPa

Surface Finish: Mill Finish

Size Specification (mm)	Weight (kg/m)	Metre/Tonne	Depth of Section	Flange (mm)		Web (mm)	
				width	Thickness	Depth/Flange	Thickness
50 x 25*	3.83	261.1	50	25			
75 x 40	5.92	169.0	75	40	6.1	62.8	3.8
100 x 50	8.33	120.0	100	50	6.7	86.6	4.2
125 x 65	11.90	84.0	125	65	7.5	110.0	4.7
150 x 75	17.70	56.5	150	75	9.5	131.0	6.0
180 x 75	20.90	47.6	180	75	11.0	158.0	6.0
200 x 75	22.90	43.7	200	75	12.0	176.0	6.0
230 x 75	25.10	39.8	230	75	12.0	206.0	6.5
250 x 90	35.50	28.2	250	90	15.0	220.0	8.0
300 x 90	40.10	24.9	300	90	16.0	268.0	8.0
380 x 100	55.20	18.1	380	100	17.5	345.0	10.0

### PARALLEL FLANGE CHANNELS LENGTH MATRIX

Metric Designation (mm)	9.0m	10.5m	12m	13.5m	15m	16.5m	18m
75 x 40	✓		✓				
100 x 50	✓		✓				
125 x 65	✓		✓				
150 x 75	✓	✓	✓	✓	✓	✓	✓
180 x 75	✓	✓	✓	✓	✓	✓	✓
200 x 75	✓	✓	✓	✓	✓	✓	✓
230 x 75	✓	✓	✓	✓	✓	✓	✓
250 x 90	✓	✓	✓	✓	✓	✓	✓
300 x 90	✓	✓	✓	✓	✓	✓	✓
380 x 100	✓	✓	✓	✓	✓	✓	✓

**NOTE :**

\* Taper Flange Channel is available subject to enquiry

2

2.4 Parallel Flange Channels

## 2.5 ANGLES

### 2.5.1 ANGLES - EQUAL ANGLES (EA)

Section: Equal Angles  
 Standard: AS/NZS 3679.1 - 300MPa  
 Surface Finish: Mill Finish

Nominal Size (mm)	Nominal Thickness (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
20 x 20	3	0.92	1087
25 x 25	3	1.12	893
	5	1.65	606
	6	2.08	481
30 x 30	3	1.35	741
	5	2.01	498
	6	2.56	391
40 x 40	3	1.83	546
	5	2.73	366
	6	3.50	286
45 x 45	3	2.06	485
	5	3.10	323
	6	3.97	252
50 x 50	3	2.31	433
	5	3.48	287
	6	4.46	224
	8	5.68	176
55 x 55	5	3.84	260
	6	4.93	203
65 x 65	5	4.56	219
	6	5.87	170
	8	7.51	133
	10	9.02	111
75 x 75	5	5.27	190
	6	6.81	147
	8	8.73	115
	10	10.50	95
90 x 90	6	8.22	122
	8	10.60	94
	10	12.70	79
100 x 100	6	9.16	109
	8	11.80	85
	10	14.20	70
	12	17.70	57

Table continues over page

2

2.5.1 Angles - Equal Angles

we'll see it through



33

## 2.5.1 ANGLES - EQUAL ANGLES CONT...

Section: Equal Angles  
Standard: AS/NZS 3679.1 - 300MPa  
Surface Finish: Mill Finish

Nominal Size (mm)	Nominal Thickness (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
125 x 125	8	14.90	67
	10	18.00	56
	12	22.50	44
	16	29.10	34
150 x 150	10	21.90	46
	12	27.30	37
	16	35.40	28
	19	42.10	24
200 x 200	13	40.00	25
	16	48.70	21
	18	54.40	18
	20	60.10	17
	26	76.80	13


### EQUAL ANGLES LENGTH MATRIX

Nominal Size (mm)	6m	7.5m	9m	12m
20 x 20	✓	✓		
25 x 25	✓	✓		
30 x 30	✓	✓		
40 x 40		✓	✓	
45 x 45		✓	✓	
50 x 50		✓	✓	
55 x 55		✓	✓	
65 x 65		✓	✓	
75 x 75			✓	✓
90 x 90			✓	✓
100 x 100			✓	✓
125 x 125			✓	✓
150 x 150			✓	✓
200 x 200			✓	✓

**NOTE :**

- Minimum order quantities (MOQ's) will apply for non standard lengths.

## 2.5.2 ANGLES - UNEQUAL ANGLES (UA)

 Section: Unequal Angles Standard: AS/NZS 3679.1 - 300MPa Surface Finish: Mill Finish			
Nominal Size (mm)	Nominal Thickness (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
65 x 50	5	4.02	249
	6	5.16	149
	8	6.59	152
75 x 50	5	4.40	228
	6	5.66	176
	8	7.23	138
100 x 75	6	7.98	125
	8	10.30	97
	10	12.40	81
125 x 75	6	9.16	109
	8	11.80	85
	10	14.20	70
	12	17.70	57
150 x 90	8	14.30	70
	10	17.30	58
	12	21.60	46
	16	27.90	36
150 x 100	10	18.00	56
	12	22.50	44

2

2.5.2 Angles - Unequal Angles

### UNEQUAL ANGLES LENGTH MATRIX

Nominal Size (mm)	9m	12m
65 x 50	✓	✓
75 x 50	✓	✓
100 x 75	✓	✓
125 x 75	✓	✓
150 x 90	✓	✓
150 x 100	✓	✓

**NOTE :**

- Minimum order quantities (MOQ's) will apply for non standard lengths.

we'll see it through



35

## 2.6 MERCHANT BAR

### 2.6.1 MERCHANT BAR - ROUNDS



Section: Merchant Bar - Rounds  
Standard: AS/NZS 3679.1 - 300MPa  
Surface Finish: Mill Finish

Nominal Size Diameter (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
6	0.23	4348
8	0.41	2439
10	0.63	1587
12	0.91	1099
14	1.24	806
16	1.61	621
18	2.04	490
20	2.52	397
22	3.05	327
24	3.64	275
27	4.61	217
30	5.69	176
33	6.88	145
36	8.19	122
39	9.61	104

**NOTE :**

- Length range available - 6 metres.
- Non standard lengths available subject to enquiry

### 2.6.2 MERCHANT BAR - SQUARES



Section: Merchant Bar - Squares  
Standard: AS/NZS 3679.1 - 300MPa  
Surface Finish: Mill Finish

Nominal Size (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
10	0.81	1235
12	1.16	862
16	2.06	485
20	3.22	311
25	5.03	199
32	8.24	121
40	12.87	78

**NOTE :**

- Length range available - 6 metres.
- Non standard lengths available subject to enquiry

## 2.6.3 MERCHANT BAR - FLATS

Section: Merchant Bar - Flats Standard: AS/NZS 3679.1 - 300MPa Surface Finish: Mill Finish		
Nominal Size (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
10 x 3	0.25	4000
13 x 3	0.31	3226
13 x 5	0.53	1887
13 x 6	0.56	1786
16 x 3	0.36	2778
16 x 5	0.60	1667
16 x 8	1.03	971
20 x 3	0.48	2083
20 x 5	0.80	1250
20 x 6	0.96	1042
20 x 10	1.61	621
25 x 3	0.60	1667
25 x 5	1.01	990
25 x 6	1.21	826
25 x 8	1.61	621
25 x 10	2.00	500
25 x 12	2.41	415
32 x 3	0.77	1299
32 x 5	1.29	775
32 x 6	1.54	649
32 x 8	2.06	485
32 x 10	2.57	389
32 x 12	3.09	324
40 x 3	0.97	1031
40 x 5	1.61	621
40 x 6	1.93	518
40 x 8	2.57	389
40 x 10	3.22	311
40 x 12	3.86	259
40 x 16	5.15	194
40 x 20	6.44	155

**NOTE :**

- Length range available - 6 metres.
- Non standard lengths available subject to enquiry

Table continues over page

## 2.6.3 MERCHANT BAR - FLATS CONT...

Section: Merchant Bar - Flats  
 Standard: AS/NZS 3679.1 - 300MPa  
 Surface Finish: Mill Finish

Nominal Size (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
50 x 3	1.21	826
50 x 5	2.01	498
50 x 6	2.42	413
50 x 8	3.22	311
50 x 10	4.02	249
50 x 12	4.83	207
50 x 16	6.44	155
50 x 20	8.05	124
50 x 25	10.06	99
65 x 3	1.57	637
65 x 5	2.62	382
65 x 6	3.14	318
65 x 8	4.18	239
65 x 10	5.23	191
65 x 12	6.28	159
65 x 16	8.37	119
65 x 20	10.46	96
65 x 25	13.08	76
75 x 5	3.02	331
75 x 6	3.62	276
75 x 8	4.83	207
75 x 10	6.03	166
75 x 12	7.24	138
75 x 16	9.66	104
75 x 20	12.07	83
75 x 25	15.09	66
75 x 40	24.14	41
90 x 6	4.35	230
90 x 8	5.79	173
90 x 10	7.24	138
90 x 12	8.69	115
100 x 5	4.03	248
100 x 6	4.83	207
100 x 8	6.44	155
100 x 10	8.05	124

Table continues over page



## 2.6.3 MERCHANT BAR - FLATS CONT...

Section: Merchant Bar - Flats Standard: AS/NZS 3679.1 - 300MPa Surface Finish: Mill Finish		
Nominal Size (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
100 x 12	9.66	104
100 x 16	12.92	77
100 x 20	16.10	62
100 x 25	20.12	50
110 x 5	4.42	226
110 x 6	5.31	188
110 x 8	7.08	141
110 x 10	8.85	113
110 x 12	10.62	94
130 x 5	5.23	191
130 x 6	6.28	159
130 x 8	8.37	120
130 x 10	10.46	96
130 x 12	12.55	80
130 x 16	16.74	60
130 x 20	20.92	48
130 x 25	26.15	38
150 x 5	6.03	166
150 x 6	7.24	138
150 x 8	9.66	104
150 x 10	12.10	83
150 x 12	14.48	69
150 x 16	19.31	52
150 x 20	24.14	41
150 x 25	30.17	33
150 x 50	60.34	17
180 x 5	7.25	138
180 x 6	8.69	115
180 x 8	11.57	86
180 x 10	14.48	69
180 x 12	17.38	58
180 x 16	23.18	43
180 x 20	28.97	35
180 x 25	36.21	28

2

2.6.3 Merchant Bar - Flats

Table continues over page

we'll see it through




39

## 2.6.3 MERCHANT BAR - FLATS CONT...

2

2.6.3 Merchant Bar - Flats

 <b>Section: Merchant Bar - Flats</b> <b>Standard: AS/NZS 3679.1 - 300MPa</b> <b>Surface Finish: Mill Finish</b>		
Nominal Size (mm)	Weight / Metre (kg/m)	Metres / Tonne (m/t)
200 x 6	9.65	104
200 x 8	12.87	78
200 x 10	16.09	62
200 x 12	19.31	52
200 x 16	25.75	39
200 x 20	32.18	31
200 x 25	40.23	25
250 x 6	12.07	83
250 x 10	20.12	50
250 x 12	24.13	41
250 x 16	32.18	31
250 x 20	40.28	25
250 x 25	50.32	20
300 x 6	14.48	69
300 x 10	24.14	41
300 x 12	28.97	35
300 x 16	38.64	26
300 x 20	48.27	21
300 x 25	60.37	17

### NOTE :

- Length range available - 6 metres.
- Non standard lengths available subject to enquiry

## 2.7 PLATE

### 2.7.1 PLAIN PLATE



 <b>Section: Plain Plate</b> <b>Standard: AS/NZS 3678 - 250 &amp; 350MPa</b> <b>Surface Finish: Mill Finish</b>					
Plate Thickness (mm)	Weight / Square Metre (kg/m <sup>2</sup> )	Metres / Linear Metre of Plate Width (kg)			
		1200mm	1500mm	1800mm	2400mm
3	23.55	28.3	35.3	42.4	56.5
4	31.40	37.7	47.1	56.5	75.4
5	39.25	47.1	58.9	70.7	94.2
6	47.10	56.5	70.7	84.8	113.0
8	62.80	75.4	94.2	113.0	150.7

Table continues over page

## 2.7.1 PLAIN PLATE CONT...




Section: Plain Plate  
Standard: AS/NZS 3678 - 250 & 350MPa  
Surface Finish: Mill Finish

Plate Thickness (mm)	Weight / Square Metre (kg/m <sup>2</sup> )	Metres / Linear Metre of Plate Width (kg)			
		1200mm	1500mm	1800mm	2400mm
10	78.50	94.0	118.0	141.0	188.0
12	94.20	113.0	141.0	170.0	226.0
16	125.60	151.0	188.0	226.0	301.0
20	157.00	188.0	236.0	283.0	377.0
22	172.70	207.0	259.0	311.0	415.0
25	196.25	236.0	294.0	353.0	471.0
28	219.80	264.0	330.0	396.0	528.0
32	251.20	301.0	377.0	452.0	603.0
36	282.60	339.0	424.0	509.0	678.0
40	314.00	377.0	471.0	565.0	754.0
45	353.25	424.0	530.0	636.0	848.0
50	392.50	471.0	589.0	707.0	942.0
55	431.75	518.0	648.0	777.0	1036.0
60	471.00	565.0	707.0	848.0	1130.0
65	510.00	612.0	765.0	918.0	1224.0
70	549.50	659.0	824.0	989.0	1319.0
75	588.75	707.0	883.0	1060.0	1413.0
80	628.00	754.0	942.0	1130.0	1507.0
90	706.50	848.0	1060.0	1272.0	1696.0
100	785.00	942.0	1178.0	1413.0	1884.0

2

2.7.1 Plain Plate

## 2.7.2 CHECKER PLATE



Section: Checker Plate  
Standard: AS/NZS 3678 - 250MPa  
Surface Finish: Mill Finish

Plate Thickness (mm)	Weight / Square Metre (kg/m <sup>2</sup> )	Metres / Linear Metre of Plate Width (kg)		
		1200mm	1500mm	1800mm
2.1	18.49	22.2		
3.0	25.55	30.7	38.3	
4.0	33.40	40.1	50.1	
5.0	41.25	49.5	61.9	
6.0	49.10	58.9	73.7	88.4

we'll see it through



41

## 2.8 STEEL SHEET COATED & UNCOATED



Section: Steel Sheet Coated & Uncoated

Standard: AS/NZS 1365, 1397, 1594, 1595

Surface Finish: Mill Finish, GALVABOND®, ZINCANNEAL®, ZINCALUME®, COLORBOND®

Thickness		Sheet Size mm x mm	Sheet Count / Tonne			
Hot Rolled	Cold Rolled		Hot Rolled	GALVABOND®	ZINCANNEAL® ZINCALUME®	Sign White & COLORBOND®
	0.40	1800 x 1200		132.76		
	0.40	2400 x 1200		99.57		
	0.55	1800 x 1200		100.48	102.38	100.20
	0.55	2400 x 1200		75.36	76.78	75.16
	0.75	1800 x 1200		74.95	75.67	
	0.75	2400 x 1200		56.21	56.75	
	0.95	1800 x 1200		59.76	61.01	
	0.95	2400 x 1200		44.82	45.76	
	1.15	1800 x 1200		49.69	50.55	
	1.15	2400 x 1200		37.27	37.91	
	1.15	2400 x 1500			30.77	
1.60	1.55	1800 x 1200	38.86	37.16	37.65	
1.60	1.55	2400 x 1200	27.64	27.87	28.33	
1.60	1.55	3000 x 1200	22.12	22.30	22.59	
	1.55	3000 x 1500		18.26		
2.00	1.95	1800 x 1200	29.49	29.68	29.99	
2.00	1.95	2400 x 1200	22.12	22.26	22.49	
2.00	1.95	3000 x 1200	17.69	17.81	17.99	
2.50	2.45	1800 x 1200	23.59	23.80		
2.50	2.45	2400 x 1200	17.69	17.85		
2.50	2.45	3000 x 1200	14.15	14.28		
3.00	2.95	1800 x 1200	19.66	19.75		
3.00	2.95	2400 x 1200	14.74	14.82		
3.00	2.95	3000 x 1200	11.80			


2.8 Steel Sheet Coated & Uncoated

### NOTE

- GALVABOND®, ZINCANNEAL®, ZINCALUME®, COLORBOND® are all registered trade names of Bluescope Steel.



# Building Products

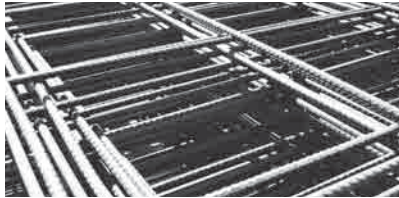







we'll see it through



## 3.1 ROOFING, CLADDING, PURLINS & ACCESSORIES

### 3.1.1 ROOFING PROFILES

ROOFING PROFILE SELECTION GUIDE								
Profile	BMT* (mm)	Mass (kg/m <sup>2</sup> )	Width of Coverage (mm)	Depth of Rib (mm)	Minimum Roof Pitch (deg / mm)	Maximum Recommended Spacing of Supports for Roof Spans in Normal conditions (mm)		
						Single	End	Internal
 42mm high clip fixed profile	0.42	4.74	700	42	1° (1 in 60)	-	1950	2500
	0.48	5.37				-	2350	2800
 48mm high rib fixed profile	0.42	4.42	680	48	1° (1 in 60)	-	2800	3400
	0.48	5.05				-	-	-
 28mm high rib fixed profile	0.42	4.42	762	28	2° (1 in 30)	1000	1300	1700
	0.48	4.96				1500	1700	2300
 24mm high rib fixed profile	0.42	4.48	700	24	3° (1 in 20)	1300	1800	2400
	0.48	5.38				2000	2200	3000
 16mm high corrugated rib fixed profile	0.42	4.42	762	16	5° (1 in 12)	700	900	1200
	0.48	4.96		16		700	1200	1600
	0.6	6.29		17		600	900	1200
 48mm high clip fixed profile	0.55	7.62	305	48	1° (1 in 60)	1800	1800	2000
	0.7	9.53				2200	2200	2500

#### NOTE:

- The above span information is to be used as a guide only. Spans have been based on a \*\*regional wind speed for Region A location (non cyclonic) as per AS1170.2.
- Different manufacturers sheet profiles may differ in dimensions and name.
- Minimum roof pitch is dependent on the length of the roof.
- Contact your Orrcon Steel representative for availability of roofing and cladding in various regions.

\* BMT Refers to Base Metal Thickness

\*\*Regional Wind Speeds









Region A - Non cyclonic

Region B - Non cyclonic but higher wind speeds than Region A

Region C - Cyclonic

Region D - Cyclonic, but higher wind speeds than Region C

### 3.1.2 WALL CLADDING PROFILES


WALL CLADDING PROFILE SELECTION GUIDE							
Profile	BMT (mm)	Mass (kg/m <sup>2</sup> )	Width of Coverage (mm)	Depth of Rib (mm)	Maximum Recommended Spacing of Supports for Roof Spans in Normal Conditions (mm)		
					Single	End	Internal
 42mm high clip fixed profile	0.42	4.74	700	42	-	2400	3300
	0.48	5.37			-	2800	3600
 16mm high corrugated rib fixed profile	0.35	3.68	762	16	-	1200	1600
	0.42	4.42		16	-	1350	1800
	0.48	4.96		16	-	1800	2400
	0.6	6.29		17	-	-	-
 24mm high rib fixed profile	0.42	4.48	700	24	1800	1800	2400
	0.48	5.38			2600	2200	3000
 28mm high rib fixed profile	0.35	3.68	762	28	-	1200	1600
	0.42	4.42			1800	1800	2200
	0.48	4.96			1950	2050	2800
 12mm high rib fixed profile	0.35	3.43	817	12	-	1800	2700
	0.42	4.11			-	1900	2800
 4mm high rib fixed profile	0.42	4.07	850	4	600	600	600
 6mm high mini corrugated rib fixed profile	0.42	4.15	810	6	1200	1200	1200
	0.48	4.65			1350	1350	1350
	0.6	5.91			1000	1000	1000
 265mm wide weatherboard profile	0.42	4.15	265	-	-	1900	2800

**NOTE:**

- The above span information is to be used as a guide only. Spans have been based on a regional wind speed for \*\*Region A location as per AS1170.2.
- Different manufacturers sheet profiles may differ in dimensions and name.
- Contact your Orrcon Steel representative for availability of roofing and cladding in various regions.

\* See previous page for regional wind speed description.

### 3.1.3 ROOF BATTENS



ROOF BATTENS		
Top Hat Size	Gauge (BMT*)	Available Stock Lengths
22	0.42	6100mm
38	0.55	6100mm
40	0.48	6100mm
	0.55	
	0.75	
50	0.75	7500mm
64	0.75	7500mm
	0.95	
75	0.75	7500mm
96	0.95	7500mm
120	0.95	7500mm


**NOTE:**

- \*BMT refers to Base Metal Thickness
- Contact your Orrcon Steel representative for availability of roof battens in various regions.





### 3.1.4 PURLINS




#### C PURLINS & GIRTS

Description	Web (mm)	Flange (mm)	Lip (mm)	Thickness (mm)	Weight/Linear Metre (kg/m)
C75-10	76	44	13.0	1.0	1.32
C75-12	76	44	13.0	1.2	1.65
C75-15	76	45	14.0	1.5	2.10
C100-10	102	51	12.5	1.0	1.78
C100-12	102	51	12.5	1.2	2.10
C100-15	102	51	13.5	1.5	2.62
C100-19	102	51	14.5	1.9	3.29
C100-24	102	51	14.5	2.4	3.84
C150-12	152	64	14.5	1.2	2.84
C150-15	152	64	15.5	1.5	3.53
C150-19	152	64	16.5	1.9	4.45
C150-24	152	64	18.5	2.4	5.57
C200-15	203	76	15.5	1.5	4.39
C200-19	203	76	19.0	1.9	5.73
C200-24	203	76	21.0	2.4	7.10
C250-19	254	76	18.5	1.9	6.27
C250-24	254	76	20.5	2.4	7.87
C300-24	300	96	27.5	2.4	10.09
C300-30	300	96	31.5	3.0	12.76
C350-24	350	125	30.0	2.4	11.96
C350-30	350	125	30.0	3.0	14.99
C400-19	400	96	34.0	1.9	10.22
C400-24	400	96	34.0	2.4	12.91
C400-30	400	96	34.0	3.0	14.99

**NOTE:**

- Stock lengths are available for selected sizes.
- Purlins & girts are made from high tensile steel and are to be fastened rather than welded.
- Use the bridging system from the relevant manufacturer to match their purlin and girt products.
- Contact your Orrcon Steel representative for availability of purlins and girt sizes in various regions.

### 3.1.4 PURLINS




#### Z PURLINS & GIRTS

Description	Web (mm)	Flange (mm)	Lip (mm)	Thickness (mm)	Weight/Linear Metre (kg/m)
Z100-10	102	53	14	1.0	1.78
Z100-12	102	53	14	1.2	2.10
Z100-15	102	53	15	1.5	2.62
Z100-19	102	53	15	1.9	3.29
Z100-24	102	53	15	2.4	3.84
Z150-12	152	65	19	1.2	2.84
Z150-15	152	65	19	1.5	3.53
Z150-19	152	65	19	1.9	4.45
Z150-24	152	65	20	2.4	5.57
Z200-15	203	79	17	1.5	4.39
Z200-19	203	79	20	1.9	5.73
Z200-24	203	79	21	2.4	7.10
Z250-19	254	79	18	1.9	6.27
Z250-24	254	79	21	2.4	7.87
Z300-24	300	100	27	2.4	10.09
Z300-30	300	100	31	3.0	12.76
Z350-24	350	129	32	2.4	11.96
Z350-30	350	129	30	3.0	14.99
Z400-19	400	129	32	1.9	10.22
Z400-24	400	129	32	2.4	12.91
Z400-30	400	129	32	3.0	14.99
Z400-32	400	129	32	3.2	17.21

**NOTE:**

- Stock lengths are available for selected sizes.
- Purlins & girts are made from high tensile steel and are to be fastened rather than welded.
- Use the bridging system from the relevant manufacturer to match their purlin and girt products.
- Contact your Orrcon Steel representative for availability of purlins and girt sizes in various regions.


### 3.1.4 PURLINS




#### PURLIN & GIRT ACCESSORIES

Cat No.	A	B	C	D	E	Metal Thickness (BMT)
100BUP	90	40				3mm
150BUP	140	60				
200BUP	190	110				
250BUP	240	160				
100GPB	90	40				
150GPB	140	60				
200GPB	190	110				
250GPB	240	160				
100GPBLL	66	115	30	60	60	
150GPBLL	105	125	30	67	60	
200GPBLL	154	136	36	73	110	
250GPBLL	200	136	36	73	160	


GPB Series



BUP Series



GPBLL Series



3

3.1.4 Purlins


we'll see it through



49

### 3.1.5 RAINWATER PRODUCTS


RAINWATER PRODUCTS		
Profiles	Gutters & Fascia Type	Gutter Accessories
	115 O.G	Mitres
	115 Quad	Stop Ends
	125 D Gutter	Support Brackets
	150 Low Front Quad	Leaf Guards
	Hi Front Quad	
	150 Halfline	
	150 Half Round	
	Fascia Gutter	
	Flat Fascia	
	Fascia Cover	

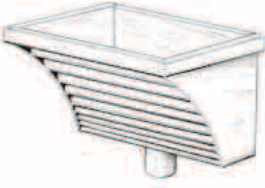Profiles	Down Pipe Accessories
	Square Down Pipes
	Round Down Pipes
	Outlets
	Rainheads
	Sumps
	Straps
	Elbows

**NOTE:**




- Different manufacturers gutter profiles are available but will differ in dimensions and name.
- More rainwater products available to order

### 3.1.6 ACCESSORIES


FASTENERS		
Profiles	Fastener Type	Unit
	M5.5 x 40 Batten Zips Plain	100 Pack
	M6 x 50 Hex Roof Zip Cl4 Eucalypt	100 Pack
	M6 x 50 Hex Roof Zip Cl4 Paperbark	100 Pack
	M6 x 50 Hex Roof Zip Cl4 Surf Mist	100 Pack
	M6 x 50 Hex Roof Zip Cl4 Headland	100 Pack

## 3.2 FENCING & WIRE MESH PRODUCTS

### 3.2.1 COLORBOND® FENCING

COLORBOND® FENCING - PRODUCT COMPONENT LIST		
Profiles	Components	Colour Range
 <p>16mm high corrugated rib fixed profile</p>  <p>42mm high clip fixed profile</p>  <p>6mm high mini corrugated rib fixed profile</p>	3 x fence sheets	Colorbond® Colour range
	2 x posts	
	2 x rails	
	15 x 10 x 16 tek screws (approx)	
	1 x plastic post cap	

### 3.2.2 GENERAL FENCING AND WIRE MESH

GENERAL FENCING & WIRE MESH		
Profiles	Product	Details
	Star Picket	450mm Black Ptd
		600mm Black Ptd
		900mm Black Ptd
		1350mm Black Ptd
		1650mm Black Ptd
		1800mm Black Ptd
		2400mm Black Ptd
		1600mm Galvanised
		1800mm Galvanised

3











3.2 Fencing & Wire Mesh Products

we'll see it through






51

### 3.2.2 GENERAL FENCING & WIRE MESH CONT...

GENERAL FENCING & WIRE MESH		
Profiles	Product	Details
	Chain Wire	Galvanised 20m rolls.
	Hinged Joint Fencing	Light and heavy hinged joint fencing available in sizes 8/90/15, 8/90/30, & 8/115/15.
	Barbed Wire	1.57HT & 1.80HT.
	Wire Netting	Ranging from 13 x 0.56mm to 50 x 1mm Roll widths from 0.9 to 1.8m.
	Fence Wire	Ranging from 2.5mm to 4mm and varying roll lengths.
	Tie Wire	Ranging from 1.25mm to 4mm diameter and in varying roll lengths.
	Post Caps	Galvanised & plastic caps available in a range of sizes.
	Fence Joints & Fittings	Tee sizes range from 20mm to 80mm. Other fittings and clamps also available.
	Gates	Available in galvanised pipe and galvanised mesh. 1130mm high. Gate widths from 775 to 4180mm.
	Gate Fittings	Gate chain latch, fittings and farm gate packs are available.
	Fencing Accessories	Additional fencing accessories include post drivers, strainers, pliers plus many more.

### 3.2.2 GENERAL FENCING & WIRE MESH CONT...


GENERAL FENCING & WIRE		
Profiles	Product	Details
	Rural Mesh	Available in galvanised finish eg, cattle, sheep, snake mesh plus more.
	W Strap	Available in black and galvanised with a rolled safety edge.
	Netting Clips	16 X 2.0mm with 500 per pack.

**NOTE:**

- For further information and detailed product specifications on the Fencing & Wire products available, refer to the Orrcon Steel Building & Accessories Product Catalogue.

### 3.3 INDUSTRIAL ACCESS SYSTEMS AND COMPONENTS

INDUSTRIAL ACCESS SYSTEMS - STANCHIONS	
Description	Unit
Stanchion platform corner galvanised	Ea
Stanchion platform (DOS0) galvanised	Ea
Stanchion platform mount galvanised	Ea
Stanchion side offset galvanised	Ea
Stanchion (S DLS0) galvanised	Ea
Stanchion (S DRS0) galvanised	Ea



CLOSURES & BENDS	
Description	Unit
32NB horizontal closure galvanised	Ea
32NB 90 deg bend (hand rail)	Ea
25NB 90 deg bend (knee rail)	Ea

we'll see it through



### 3.3 INDUSTRIAL ACCESS SYSTEMS AND COMPONENTS CONT...

STAIR TREADS & KICK BRACKETS	
Description	Unit
Stair tread bolt-in galvanised 275 x 750mm	Ea
Grating saddle clips galvanised	Ea
Kick plate brackets galvanised	Ea
Kick plate brackets black	Ea
Abrasive nosing 730mm (yellow)	Metre

### 3.4 REINFORCING PRODUCTS

DEFORMED BAR - Deformed Reinforcement Bar D500N - AS/NZS 4671		
Size (mm)	Weight Per Metre kg/m	Metres Per Tonne m/t
N12	0.923	1083
N16	1.642	609
N20	2.470	390

**NOTE:**

- Available in 6, 9 & 12m lengths subject to minimum order quantities (MOQ's).
- S Grade bar for swimming pools is available upon request. Subject to minimum order quantities (MOQ's).

3

3.4 Reinforcing Products

REINFORCING MESH AS/NZS 4671			
Description	Standard Unit	Typical Size (mm)	Weight Per Sheet (kg)
SL81	Sheet	6.0 x 2.4	105
SL52	Sheet	6.0 x 2.4	11
SL52H	Half Sheet	6.0 x 2.4	21
SL62	Sheet	6.0 x 2.4	33
SL62H	Half Sheet	6.0 x 2.4	16
SL72	Sheet	6.0 x 2.4	40
SL72H	Half Sheet	6.0 x 2.4	20
SL82	Sheet	6.0 x 2.4	52
SL92	Sheet	6.0 x 2.4	65
SL102	Sheet	6.0 x 2.4	80
RL718	Sheet	6.0 x 2.4	68
RL818	Sheet	6.0 x 2.4	79



### 3.4 REINFORCING PRODUCTS

REINFORCING MESH AS/NZS 4671			
Description	Standard Unit	Typical Size (mm)	Weight Per Sheet (kg)
RL918	Sheet	6.0 x 2.4	93
RL1018	Sheet	6.0 x 2.4	109
RL1118	Sheet	6.0 x 2.4	131
RL1218	Sheet	6.0 x 2.4	157

**NOTE:**

**Product Designation example - RL718**

- R (Rectangular), L (Class L - low carbon), 7 (long wire nominal diameter), 1 (100mm long wire pitch spacing).
- 8 (cross wire nominal diameter). Cross wire pitch spacing is always 200mm for rectangular mesh.

**Product Designation example - SL82**

- S (Square), L (Class L - low carbon), 8 (long & cross wire nominal diameter), 2 (200mm long & cross wire pitch spacing) H - this defines a half sheet.

TRENCH MESH AS/NZS 4671			
Description	Length (m)	Width (m)	Weight Per Sheet (kg)
3 Bar 200 x 8mm	6.0	0.2	7
3 Bar 200 x 11mm	6.0	0.2	13
4 Bar 300 x 11mm	6.0	0.3	9
4 Bar 300 x 8mm	6.0	0.3	18
5 Bar 400 x 11mm	6.0	0.4	11
5 Bar 400 x 8mm	6.0	0.4	22

WELDED MESH Galvanised			
Description	Length (m)	Width (m)	Weight Per Sheet (kg)
25 x 25 x 2.5mm	1.8	1.2	7
25 x 25 x 2.5mm	2.0	1.2	8
25 x 25 x 2.5mm	2.4	1.2	9
25 x 25 x 2.5mm	3.0	2.4	23

Table continues over page

### 3.4 REINFORCING PRODUCTS CONT...

WELDED MESH Galvanised			
Description	Length (m)	Width (m)	Weight Per Sheet (kg)
50 x 25 x 2.5mm	2.0	1.2	6
50 x 25 x 3.15mm	2.0	1.2	9
50 x 25 x 3.15mm	3.0	2.4	27
50 x 50 x 3.15mm	2.4	1.2	11
50 x 50 x 3.5mm	2.4	1.2	12
50 x 50 x 4.0mm	2.0	1.2	10
50 x 50 x 4.0mm	2.4	1.2	12
50 x 50 x 4.0mm	3.0	2.4	29
75 x 50 x 2.5mm	1.8	2.0	9
75 x 50 x 3.0mm	2.4	1.2	9
75 x 50 x 3.5mm	2.4	1.2	10
75 x 50 x 4.0mm	2.0	1.2	8
75 x 50 x 4.0mm	2.4	1.2	10
75 x 50 x 4.0mm	3.0	2.4	24
75 x 50 x 5.0mm	3.0	2.4	38
100 x 100 x 4.0mm	2.0	1.2	5
100 x 100 x 4.0mm	2.4	1.2	6
100 x 100 x 5.0mm	3.0	2.4	19

3

3.4 Reinforcing Products

REINFORCING ACCESSORIES	
Description	Unit
125mm black rod ties	2000 per pack
150mm black rod ties	200 per pack
150mm black rod ties	2000 per pack
250mm galvanised rod ties	2000 per pack
300mm galvanised rod ties	2000 per pack
Bar chairs 50/65	200 per pack
12mm corner bar 600 x 600mm	Ea
12mm starter bar 1000 x 200mm	Ea
1.57mm black beltpak	95m
Aluminium reel for beltpak	Ea

### 3.5 BUILDING CONSUMABLE PRODUCTS

CONCRETE	
Description	Unit
Post Mix 20kg	20kg
Rapid Set Mix 20kg	20kg

CUTTING DISC	
Description	Unit
Disc metal cut off 100 x 1.0 x 16mm	Ea
Disc metal cut off 115 x 1.0 x 22mm	Ea
Disc metal cut off 125 x 1.0 x 22mm	Ea

RODS & WIRE	
Description	Unit
Mig wire 0.9mm (gasless)	5kg Pack
Welding rod 2.5mm 12g	2.5kg Pack
Welding rod 3.2mm 10g	2.5kg Pack

MASKS & GLOVES		
Profiles	Product	Details
	Masks	A range of welding masks available
	Gloves	A range of welding gloves available

METAL PAINT PROTECTION	
Description	Unit
Liquid Allgal paint - aerosol	400g
Liquid Allgal - drum	20L

3




3.5 Building Consumable Products

we'll see it through




57

### 3.6 BUILDING ACCESSORIES & TOOLS

ACCESSORIES & TOOLS		
Profiles	Product	Details
	General purpose brackets & base plates	A variety of different size brackets & base plates are available.
	Safety accessories	A selection of safety tapes are available.
	Load restraints	A range of ratchet assemblies, chains, & ropes are available.
	Trade tools	A variety of trade tools are available ranging from bolt cutters, pliers, post drivers and more.

**NOTE:**

- For further information and detailed product specifications on the range of building accessories & tools available, refer to the **Orrcon Steel Building & Accessories Product Catalogue**.

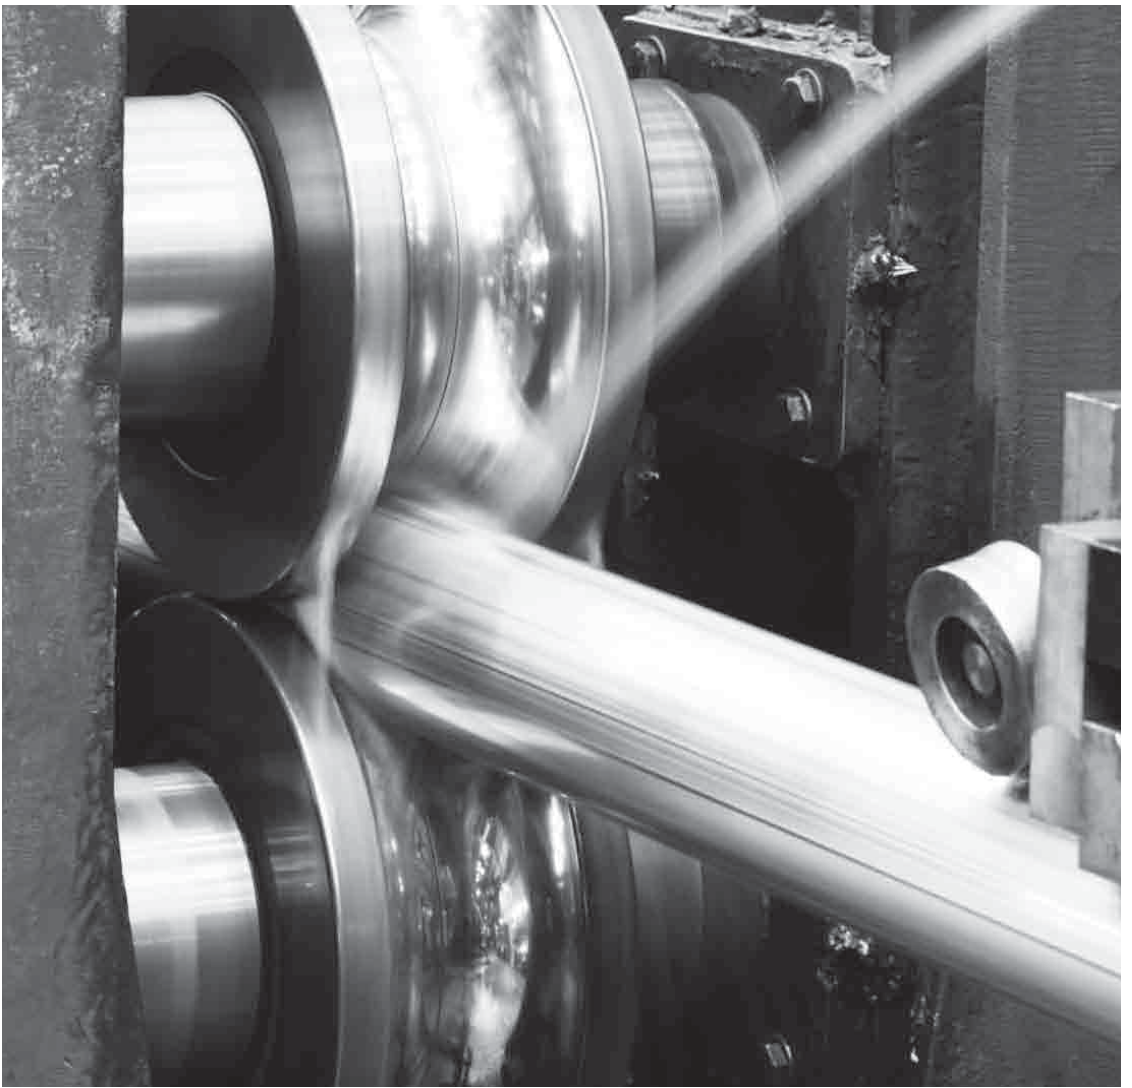

## General Information

we'll see it through



59

## 4.1 TEST CERTIFICATES & LETTERS OF COMPLIANCE

Orrcon Steel manufacture and source a range of structural steel products which comply with one of the following Australian Standards:

- AS/NZS 1163 Cold-Formed Structural Steel Hollow Sections.
- AS/NZS 3679.1 Structural Steel, Part 1 Hot Rolled Bars and Sections.
- AS/NZS 3678 Structural Steel Hot Rolled Plates, Floor plates and Slabs.

Test Certificates (TC's) and Letters of Compliance (LOC's) are available for customers and end-users of Orrcon Steel manufactured products on request. LOC's list details of the products supplied and may also provide indicative properties. LOC's are issued on an Orrcon Steel letterhead and are signed by a responsible officer. TC's detail standard and grade specification details along with the results of chemical, mechanical and physical property analysis conducted on representative samples from the supplied batch of product. They provide sufficient product identification and technical detail to enable independent verification of batch compliance to the relevant standard. These documents are developed in full compliance with the appropriate standard and are generated as email ready Adobe PDF documents.

If requirements for the supply of TC or LOC documents are not specified at the point of order it is the customers responsibility to provide suitable product traceability details as requested by Orrcon Steel (such as pack numbers, tube marking and heat or coil numbers). Orrcon Steel cannot be held responsible for product traceability once it has been delivered to a customer's site. Orrcon Steel utilise NATA accredited laboratories to determine the chemistry and mechanical properties of its manufactured product range. NATA is an ILAC (MRA) signatory and the relevant details for the test laboratories are noted on test certificates.

## 4.2 PACKAGING, HANDLING AND STORAGE

### Storage and Transport

Store all steel and steel related products in a stable configuration. Avoid contact with corrosive agents such as acids, alkalis and salts. Transport in accordance with Government Regulations and always ensure load is secure.

With Zinc coated, Aluminised or ALLGAL® products, attention should be paid to the conditions of transport and storage to avoid the possibility of damage or wet-storage stain.

A corrosion known as white rust can occur on freshly Zinc coated products that are transported or stored under damp and/or badly ventilated conditions. The corrosion is frequently superficial despite it's bulkiness. It may be unattractive, but is not usually detrimental to the other properties of the coating.

The packed product should be kept undercover in clean, dry and ventilated conditions. This is especially important for products in the lower size range as their bundle configuration restricts natural ventilation. Storage under covers which restrict ventilation (e.g tarps) is not recommended.

## 4.2 PACKAGING, HANDLING AND STORAGE CONT...

If products have to be stored outside, then the packs should be broken up and stacked with a wooden spacer between each layer. The stack should be on an incline so that any water can run off the product. Products should never be stored in contact with cardboard or paper products, cinders, clinkers, unseasoned timbers or harmful chemicals. White rust can be removed with a high pressure water cleaner, scrubbing brush or soft scouring pad. Kerosene is also a good agent for the removal of white rust.

If the Zinc or ALLGAL® coating is subject to excessively rough treatment and some damage does occur, the area should be cleaned and touched up with one of the following coatings:

- Organic Zinc-rich primer; or
- In-organic Zinc silicate paint; or
- Zinc metal spray.

These coatings should be applied in accordance with manufacturer recommendations.

## 4.3 MATERIAL SAFETY DATA INFORMATION

### Electric Resistance Welding (ERW) Tube Identification

**STRUCTURAL TUBE** - Rectangular Hollow Section (RHS), Square Hollow Section (SHS) and Circular Hollow Section (CHS).

**PRECISION TUBE** - Rectangular, Square, Round and Oval.

Use: Steel fabricating, fencing, furniture, exhausts etc.

Physical Description / Properties	
Appearance: Structural	Blue (Primed), Red (Primed), Black (Primed), Silver (Electrogalvanised) and NOPC (no oil, paint or coating).
Appearance: Precision	Dull Grey and Silver (Zinc and Aluminium Coated)
Melting Point	Base Metal 1535 °C
Fire and Explosive Hazard	Steel products (primed or oiled) in the solid state present no fire or explosive hazard. Under normal fire conditions decomposition of the metal will not occur, but deformation of the steel member may occur. Irritant fumes may be produced during a fire situation. Hazardous decomposition products may occur on heating or burning of the primer giving Carbon Dioxide, Carbon Monoxide, soot and smoke.

### Health Hazard Information

Steel products under normal conditions do not present an inhalation, ingestion or contact health hazard. However, operations such as burning, welding, sawing, brazing, grinding etc., which result in the temperature of product rising above the melting or surface coating, may present health hazards.

Welding fume tests performed show that no organic compounds are evolved when welding painted Orrcon Steel tube & pipe. The fumes generated are less than 5mg/m2 which meet ACGIH threshold limit values.

## 4.3 MATERIAL SAFETY DATA INFORMATION CONT...

### Fuming

Zinc coated, Aluminum coated and ALLGAL® coated product are designed so that weld fume levels are well below the accepted Short Term Exposure Limits (STEL) of 10mg/m<sup>2</sup>, when normal welding practices are used.

Fire/Explosion Hazard irritant fumes may be produced during a fire situation. Decomposition products include oxides of Carbon.

### Effects Of Over-Exposure

The major exposure hazard is the inhalation of fumes or dust. Chronic inhalation of high concentration Iron Oxide fumes or dusts may lead to Benign Pneumoconiosis (Siderosis). Inhalation of high concentration of Ferric Oxide may increase the risk of lung cancer in persons exposed to pulmonary carcinogens.

### Precautions For Use

Metal products are stable under normal conditions of use, storage, handling and transport and require no special precautions. When performing normal metalworking operations, eye and respiratory protection should be used.

### Welding

The following consumables are recommended by AS 1544.1 when welding welded tube sections:

- Manual metal-arc (MMAW) E41XX, E48XX
- Gas metal-arc (MIG) (GMAW) W50x

Welding ALLGAL® is similar to welding painted tube & pipe. For further information on ALLGAL® consumables please contact Orrcon Steel.

### First Aid

**Swallowed:** Not applicable

**Eye:** Holding eyelids open, flood with water for at least 15 minutes. Seek medical attention urgently.

**Skin:** For lacerations, clean and dress wound. Apply pressure bandage and elevate injured area. Obtain medical aid urgently. For burns, apply copious quantities of cool water. Do not apply creams. Seek medical attention urgently.

**Inhaled:** Remove from contaminated air. Maintain breathing with artificial respiration if necessary. Seek medical attention urgently.

**Advice to Doctor:** Refer to section on inhalation hazards for welding operations involving Zinc coated steel.

For a safety sheet and further information please contact Orrcon Steel.



## 4.3 MATERIAL SAFETY DATA INFORMATION CONT...

NOTE: This information is taken from sources believed to be accurate and correct. Orrcon Steel makes no warranty as to the correctness or the sufficiency of the information supplied. Furthermore no warranty is given or implied that under certain conditions additional protective measures may be required.

### Spills and Disposal

Recycle scrap steel or dispose of it at an approved site.

Fire/explosion hazard: Irritant fumes may be produced during a fire situation. Decomposition products include oxides of Carbon.

## 4.4 GLOSSARY OF TERMS

### Tube & Pipe

<b>NOPC</b>	No oil or paint coating.
<b>MSBR – MILD STEEL BRIGHT</b>	Tube has a bright finish and is typically used in the manufacture of products that require a higher grade surface finish such as electroplating or similar critical finish applications. Typical applications – domestic & commercial furniture, chrome plated lawn mower handles etc. This material is seldom used given cost and low demand.
<b>SEMB – SEMI BRIGHT</b>	Tube has typical steel grey appearance and has a suitable surface for general applications. Ideal where demanding and consistent properties are required. Typical applications - domestic and commercial furniture, exhaust systems, shelving etc.
<b>HRSB HOT ROLLED SEMI BRIGHT</b>	Tube has typical steel grey appearance, surface is suitable for general applications and is ideal for paint or powder coated processes. Typical applications – racking, shelving, fitness equipment, cargo barriers etc.
<b>MSBL – MILD STEEL BLACK</b>	Tube has a black, mill finish. Typical applications – ideal for hot dipped galvanised applications such as signs or fence posts.
<b>ACMS (ALUMINIUM COATED MILD STEEL)</b>	Tube rolled from hot dipped Aluminium coated steel strip, with Aluminium coating both sides. Typical applications - heat resistant applications eg. automotive exhausts, domestic gas heaters.
<b>MSGB (MILD STEEL GALVABOND®)</b>	Tube rolled from hot dipped Zinc coated steel strip, with Zinc coating both sides. Typical applications – exterior use such as tubular fencing, outdoor furniture and promotional signage.

NOTE: GALVABOND®, ZINCANNEAL®, ZINCALUME®, COLORBOND® are all registered trade names of Bluescope Steel

## 4.4 GLOSSARY OF TERMS CONT...

<b>HTGB (HI TENSILE GALVABOND®)</b>	High strength tube rolled from hot dipped Zinc coated steel strip, with Zinc coating both sides. Typical applications - outdoor tubular products where greater strength and reduced weight is required.
<b>ERW</b>	Electric Resistance Welding.
<b>C350L0</b>	The term used to designate tube and pipe yield stress. The C means cold formed, 350 is the yield strength of 350MPa, L is the guaranteed impact properties, 0 is the low temperature impact test at 0 degrees. This is used to define the notch toughness and it's suitability to brittle behavior. It complies with AS/NZS1163.
<b>C250L0</b>	As above but the 250 designates a yield strength of 250 MPa.
<b>C450L0</b>	As above but the 450 designates a yield strength of 450 MPa.
<b>PICKLED STEEL</b>	Steel that has gone through a process of pickling which is a surface treatment used to remove impurities, such as stains, inorganic contaminants, rust or scale.

### Hot Rolled Structural & Plate

<b>ANGLE LINE</b>	A machine tool that uses a conveyor to move an angle section into position, then drills holes. The drill moves but the angle is static.
<b>ASSEMBLY &amp; SHAFT DRAWINGS</b>	Drawings where overall dimensions of the assembled object are usually indicated, but the detailed dimension for manufacture is excluded.
<b>BAND SAW</b>	A band saw is a machine which uses a blade consisting of a continuous band of metal with teeth along one edge to cut steel sections.
<b>BEAM LINE</b>	An automatic structural steel processing system. This includes cutting, drilling, coping, and bevelling processes. The components in the line include band saws and drilling machines.
<b>BEARING PLATE</b>	A flat steel plate used under the end of a wall-bearing beam to distribute the load over a broader area.
<b>BISALLOY &amp; HARDOX</b>	Brand names for wear plate. A high strength, wear resistant, and armour grade steel plate. It is a quench and tempered plate.
<b>BORING</b>	In machining, boring is the process of enlarging a hole that has already been drilled (or cast), by means of a single-point cutting tool. Boring is used to achieve greater accuracy of the diameter of a hole, and can be used to cut a tapered hole.

## 4.4 GLOSSARY OF TERMS CONT...

<b>BROACHING</b>	Broaching is a machining process that uses a toothed tool, (called a broach), to remove material. There are two main types of broaching: linear and rotary.
<b>CHECKER/FLOOR PLATE</b>	A type of slip-resistant floor plate with a distinctive raised pattern that is used for walkways and platforms.
<b>COPING</b>	Coping a beam assures it can be fixed to an intersecting column (or another beam) by eliminating a part that could be an interference. Machinery builders developed a means whereby the beam is rolled into a "cutting box" and this is done in a beam line.
<b>GUSSET</b>	A steel plate used to connect two or more structural members in the same plane. Often used to strengthen the section beneath the bottom flange.
<b>HAUNCH</b>	Also known as a Knee. The deepened portion of a column or rafter, designed to accommodate the high stress where column and rafter intersect and connect.
<b>HOT ROLLED</b>	A steel section that is shaped by rollers in a semi-molten state.
<b>FAST CAM</b>	A software system for fabrication of steel elements and all types of processes that go with it. It includes an integrated drawing editor and is fully compatible with CAD and other industry standard files. A quoting system is also built-in to this.
<b>FITTINGS</b>	The term also used to describe cleats and items that are welded onto beams and columns.
<b>LASER CUTTING</b>	A process that cuts material with the heat obtained by directing a laser beam against a metal surface.
<b>PFC</b>	Parallel Flange Channel.
<b>PLASMA CUTTING</b>	Plasma cutters work by sending an electric arc through a gas that is passing through a constricted opening. As the metal being cut is part of the circuit, the electrical conductivity of the plasma causes the arc to transfer to the work.
<b>PLATE PROFILE CUTTING BED</b>	A platform used to support the plate material whilst cutting with the oxy, plasma, or laser cutting machine.
<b>MERCHANT BAR</b>	A steel section that is hot rolled from a billet into a round, square, hexagonal or other shape.

## 4.4 GLOSSARY OF TERMS CONT...

<b>SCALE</b>	Layers of iron oxide formed on the surface of hot steel when oxygen from the atmosphere combines with iron from the steel. Also referred to as Mill Scale.
<b>SHOP DRAWINGS</b>	The drawings used to manufacture the steel components for a structure.
<b>UA</b>	Unequal Angle section
<b>UB</b>	Universal Beam. The section is used as a beam and is an I shape section. A structural member which is ordinarily subject to bending and is usually a horizontal member carrying vertical loads.
<b>UC</b>	Universal Column. The section is used as a column and is a H shape section.
<b>ULTIMATE TENSILE STRENGTH</b>	The maximum stress a material can withstand before the cross section of the product starts to fracture or fail.
<b>WEB STIFFENER</b>	A plate that is welded in between the bottom and top flanges to create stability and strength for the web of the section.
<b>YIELD STRESS / STRENGTH</b>	Stress / Strength measurement at which steel first exhibits plastic deformation. Beyond this point it does not return to it's original form after the stress has been removed.
<b>YIELD POINT</b>	The stress at which material permanently deforms. This is the same stress as the yield strength and is another way of describing it.
<b>300MPa YIELD</b>	The yield stress grade is 300 MPa. The tensile strength is a minimum of 440 MPa.
<b>350 MPa YIELD</b>	The yield stress grade is 350 MPa. The tensile strength is a minimum of 480 MPa.

### DISCLAIMER

The information and advice contained in this document is of a general nature only. You should always obtain specialist advice to ensure that the materials, approach and techniques referred to in this document meet your specific requirements. Orrcon Operations Pty Ltd disclaims all liability and responsibility for any loss or damage, direct or indirect, which may be suffered by any person acting in reliance on anything contained in or omitted from this document.

LEFT BLANK INTENTIONALLY

we'll see it through



67

## 4.5 END CODING CHARTS

### 4.5.1 END CODING CHART - HOT ROLLED STRUCTURAL

4.5.1 End Coding Chart - Hot Rolled Structural

Universal Beams (UB)		
Depth (mm)	Weight (kg/mtr)	Colour
150	14.0	Blue
150	18.0	Purple
180	16.1	Blue
180	18.1	Purple
180	22.2	Red
200	18.2	White
200	22.3	Blue
200	25.4	Purple
200	29.8	Red
250	25.7	Blue
250	31.4	Purple
250	37.3	Red
310	32.0	Blue
310	40.4	Purple
310	46.2	Red
360	44.7	Blue
360	50.7	Purple
360	56.7	Red
410	53.7	Blue
410	59.7	Purple
460	67.1	Blue
460	74.6	Purple
460	82.1	Red
530	82.0	Blue
530	92.4	Purple
610	101.0	Blue
610	113.0	Purple
610	125.0	Red

Universal Columns (UC)		
Depth (mm)	Weight (kg/mtr)	Colour
100	14.8	Blue
150	23.4	Blue
150	30.0	Purple
150	37.2	Red
200	46.2	Blue
200	52.2	Purple
200	59.5	Red
250	72.9	Blue
250	89.5	Purple
310	96.8	White
310	118.0	Blue
310	137.0	Purple
310	158.0	Red

Parallel Flange Channels (PFC)	
Size (mm)	Colour
75 x 40	Blue
100 x 50	Purple
125 x 65	Red
150 x 75	Blue
180 x 75	Purple
200 x 75	Red
230 x 75	White
250 x 90	Orange
300 x 90	Yellow
380 x 100	White

Round & D-Bar	
Diameter (mm)	Colour
6.0	White
8.0	Red
10.0	Yellow
12.0	Pink
14.0	Orange
16.0	Grey
18.0	Purple
20.0	Green
24.0	Pink
27.0	Blue
30.0	Yellow
33.0	Grey
36.0	Red
39.0	Orange

Square Bar	
Thickness (mm)	Colour
10.0	Yellow
12.0	Pink
16.0	Grey
20.0	Green
25.0	Purple
32.0	Orange
40.0	Yellow
50.0	Green

4

## 4.5.1 END CODING CHART - HOT ROLLED STRUCTURAL

Sheet – Flat Plate & Plate	
Thickness (mm)	Colour
0.55	Grey
0.75	Green
0.95	Orange
1.20	White
1.60	Purple
2.00	Yellow
2.10	Grey
2.40	Pink
3.0	Blue
4.0	Green
5.0	Orange
6.0	White
8.0	Red
10.0	Yellow
12.0	Pink
16.0	Grey
20.0	Green
25.0	Purple
28.0	Blue
32.0	Orange
36.0	Red
40.0	Yellow
45.0	Grey
50.0	Green

Flat Bar & Angle	
Thickness (mm)	Colour
2.0	Yellow
3.0	Blue
4.0	Green
5.0	Orange
6.0	White
8.0	Red
10.0	Yellow
12.0	Pink
14.0	Orange
16.0	Grey
20.0	Green
25.0	Purple

**NOTE:**

- Not all products are available at all locations. Please contact your local Orrcon Steel branch for availability of products.
- 350 Grade plate is identified with a red mark on the product.

## 4.5.2 END CODING CHART - TUBE & PIPE

Square (SHS)		
Size (mm)	Thickness (mm)	Colour
20x20	1.6	Purple
25x25	1.6	Purple
30x30	1.6	Purple
35x35	1.6	Purple
40x40	1.6	Purple
50x50	1.6	Purple
65x65	1.6	Purple
25x25	2.0	Yellow
30x30	2.0	Yellow
35x35	2.0	Yellow
40x40	2.0	Yellow
50x50	2.0	Yellow
65x65	2.0	Yellow
75x75	2.0	Yellow
89x89	2.0	Yellow
100x100	2.0	Yellow
25x25	2.5	Pink
30x30	2.5	Pink
35x35	2.5	Pink
40x40	2.5	Pink
50x50	2.5	Pink
65x65	2.5	Pink
75x75	2.5	Pink
89x89	2.5	Pink
100x100	2.5	Pink
25x25	3.0	Blue
30x30	3.0	Blue
35x35	3.0	Blue
40x40	3.0	Blue
50x50	3.0	Blue
65x65	3.0	Blue
75x75	3.0	Blue
100x100	3.0	Blue
75x75	3.5	Grey
89x89	3.5	Grey
40x40	4.0	Green
50x50	4.0	Green
65x65	4.0	Green
75x75	4.0	Green
100x100	4.0	Green
125x125	4.0	Green
50x50	5.0	Orange
65x65	5.0	Orange
75x75	5.0	Orange

Square (SHS)		
Size (mm)	Thickness (mm)	Colour
89x89	5.0	Orange
100x100	5.0	Orange
125x125	5.0	Orange
150x150	5.0	Orange
200x200	5.0	Orange
50x50	6.0	White
65x65	6.0	White
75x75	6.0	White
89x89	6.0	White
100x100	6.0	White
125x125	6.0	White
150x150	6.0	White
200x200	6.0	White
250x250	6.0	White
300x300	6.0	White
100x100	9.0	Purple
125x125	9.0	Purple
150x150	9.0	Purple
200x200	9.0	Purple
250x250	9.0	Purple
300x300	9.0	Purple
350x350	9.0	Purple
400x400	9.0	Purple
200x200	12.5	
250x250	12.5	
300x300	12.5	
350x350	12.5	
400x400	12.5	
200x200	16.0	
250x250	16.0	
300x300	16.0	
350x350	16.0	
400x400	16.0	

Rectangular (RHS)		
Size (mm)	Thickness (mm)	Colour
50x25	1.6	Purple
65x35	1.6	Purple
75x25	1.6	Purple
75x50	1.6	Purple
100x50	1.6	Purple
38x25*	1.6	Purple

Rectangular (RHS)		
Size (mm)	Thickness (mm)	Colour
50x20*	1.6	Purple
76x38*	1.6	Purple
80x40*	1.6	Purple
50x25	2.0	Yellow
65x35	2.0	Yellow
75x25	2.0	Yellow
75x50	2.0	Yellow
100x50	2.0	Yellow
125x75	2.0	Yellow
150x50	2.0	Yellow
38x25*	2.0	Yellow
50x20*	2.0	Yellow
50x30*	2.0	Yellow
50x40*	2.0	Yellow
76x38*	2.0	Yellow
127x51*	2.0	Yellow
75x50	2.3	Silver
50x25	2.5	Pink
65x35	2.5	Pink
75x25	2.5	Pink
75x50	2.5	Pink
100x50	2.5	Pink
125x75	2.5	Pink
150x50	2.5	Pink
38x25*	2.5	Pink
50x20*	2.5	Pink
50x30*	2.5	Pink
76x38*	2.5	Pink
80x40*	2.5	Pink
127x51*	2.5	Pink
50x25	3.0	Blue
65x35	3.0	Blue
75x50	3.0	Blue
100x50	3.0	Blue
125x75	3.0	Blue
150x50	3.0	Blue
150x100	3.0	Blue
50x20*	3.0	Blue
76x38*	3.0	Blue
127x51*	3.0	Blue
100x50	3.5	Grey
102x76*	3.5	Grey
127x51*	3.5	Grey
152x76*	3.5	Grey

Table continues over page



## 4.5.2 END CODING CHART - TUBE & PIPE CONT...

Rectangular (RHS)		
Size (mm)	Thickness (mm)	Colour
65x35	4.0	Green
75x50	4.0	Green
100x50	4.0	Green
125x75	4.0	Green
150x50	4.0	Green
150x100	4.0	Green
200x100	4.0	Green
76x38*	4.0	Green
127x51*	4.0	Green
75x50	5.0	Orange
100x50	5.0	Orange
125x75	5.0	Orange
150x50	5.0	Orange
150x100	5.0	Orange
200x100	5.0	Orange
250x150	5.0	Orange
102x76*	5.0	Orange
127x51*	5.0	Orange
152x76*	5.0	Orange
75x50	6.0	White
100x50	6.0	White
125x75	6.0	White
150x50	6.0	White
150x100	6.0	White
200x100	6.0	White
250x150	6.0	White
300x200	6.0	White
400x200	6.0	White
102x76*	6.0	White
127x51*	6.0	White
152x76*	6.0	White
150x100	9.0	Purple
200x100	9.0	Purple
250x150	9.0	Purple
300x200	9.0	Purple
400x200	9.0	Purple
400x300	9.0	Purple
250x150	12.5	
300x200	12.5	
350x250	12.5	
400x200	12.5	
400x300	12.5	
250x150	16.0	
300x200	16.0	

Rectangular (RHS)		
Size (mm)	Thickness (mm)	Colour
350x250	16.0	
400x300	16.0	

Yard Rail		
Size (mm)	Thickness (mm)	Colour
59x30	1.6	Purple
59x30	2.0	Yellow
97x42	2.0	Yellow
115x42	2.0	Yellow
62x50*	2.0	Yellow
80x61*	2.0	Yellow
115x42	2.3	Silver
97x42	2.5	Pink
62x50*	2.5	Pink
80x61*	2.5	Pink

Pipe (CHS)		
Size (mm)	Thickness (mm)	Colour
25.4 NB	2.0	Green
20 NB / 26.9 OD	2.0	Green
25 NB / 33.7 OD	2.0	Green
32 NB / 42.4 OD	2.0	Green
20 NB / 26.9 OD	2.3	Yellow
40 NB / 48.3 OD	2.3	Green
50 NB / 60.3 OD	2.3	Green
65 NB / 76.1 OD	2.3	Green
20 NB / 26.9 OD	2.6	Blue
25 NB / 33.7 OD	2.6	Yellow
32 NB / 42.4 OD	2.6	Yellow
80 NB / 88.9 OD	2.6	Green
90 NB / 101.6 OD	2.6	Green
100 NB / 114.3 OD	2.6	Green
40 NB / 48.3 OD	2.9	Yellow
50 NB / 60.3 OD	2.9	Yellow
125 NB / 139.7 OD	3.0	Green
150 NB / 165.1 OD	3.0	Green
20 NB / 26.9 OD	3.2	
25 NB / 33.7 OD	3.2	Blue
32 NB / 42.4 OD	3.2	Blue
40 NB / 48.3 OD	3.2	Blue

Pipe (CHS)		
Size (mm)	Thickness (mm)	Colour
65 NB / 76.1 OD	3.2	Yellow
80 NB / 88.9 OD	3.2	Yellow
90 NB / 101.6 OD	3.2	Yellow
100 NB / 114.3 OD	3.2	Green
125 NB / 139.7 OD	3.5	Yellow
150 NB / 165.1 OD	3.5	Yellow
50 NB / 60.3 OD	3.6	Blue
65 NB / 76.1 OD	3.6	Blue
100 NB / 114.3 OD	3.6	Yellow
25 NB / 33.7 OD	4.0	Red
32 NB / 42.4 OD	4.0	Red
40 NB / 48.3 OD	4.0	Red
80 NB / 88.9 OD	4.0	Blue
90 NB / 101.6 OD	4.0	Blue
50 NB / 60.3 OD	4.5	Red
65 NB / 76.1 OD	4.5	Red
100 NB / 114.3 OD	4.5	Blue
80 NB / 88.9 OD	5.0	Red
90 NB / 101.6 OD	5.0	Red
125 NB / 139.7 OD	5.0	Blue
150 NB / 165.1 OD	5.0	Blue
100 NB / 114.3 OD	5.4	Red
125 NB / 139.7 OD	5.4	Red
150 NB / 165.1 OD	5.4	Red

LEGEND	
SHS, RHS & Rails	Pipe (CHS)
Purple 1.6	Green
Yellow 2.0	Extra Light
Silver 2.3	Yellow
Pink 2.5	Light
Blue 3.0	Blue
Grey 3.5	Medium
Green 4.0	Red
Orange 5.0	Heavy
White 6.0	
Purple 9.0	

### NOTE:

- Pipe (CHS) manufactured to AS/NZS1163/API5L is not listed and has no end code.
- Product list without end code has no designated code.
- Other sizes available subject to enquiry.
- + Non-standard rectangular (RHS).
- \* Flat sided round (post).

LEFT BLANK INTENTIONALLY





# CONTACT US

## CALL ORRCON STEEL

1300 ORRCON (1300 677 266)

[www.orrconsteel.com.au](http://www.orrconsteel.com.au)

### HEAD OFFICE

121 Evans Rd,  
**SALISBURY** QLD 4107  
Ph: 07 3274 0500  
Fax: 07 3274 0517  
E: [info@orrcon.com.au](mailto:info@orrcon.com.au)

### QLD

947 Nudgee Rd,  
**BANYO** QLD 4014  
Tel: 07 3621 8400 | Fax: 07 3621 8411  
E: [salesqld@orrcon.com.au](mailto:salesqld@orrcon.com.au)

100 Enterprise St,  
**BUNDABERG** QLD 4670  
Tel: 07 4153 3733 | Fax: 07 4154 3433  
Email: [salesbundy@orrcon.com.au](mailto:salesbundy@orrcon.com.au)

75 Aumuller St,  
**CAIRNS** QLD 4870  
Tel: 07 4035 5155 | Fax: 07 4035 5199  
E: [salescairns@orrcon.com.au](mailto:salescairns@orrcon.com.au)

506 Maroochydore Rd,  
**MAROOCHYDORE** QLD 4556  
Tel: 07 5456 9100 | Fax: 07 5456 9111  
E: [salesmaroochydore@orrcon.com.au](mailto:salesmaroochydore@orrcon.com.au)

10 Reynolds St,  
**MAREEBA** QLD 4880  
Tel: 07 4092 7566 | Fax: 07 4092 7588  
E: [salesmareeba@orrcon.com.au](mailto:salesmareeba@orrcon.com.au)

96 Spencer Rd,  
**NERANG** QLD 4211  
Tel: 07 5578 0600 | Fax: 07 5578 0610  
E: [salesnerang@orrcon.com.au](mailto:salesnerang@orrcon.com.au)

36 Carrington Rd,  
**TOOWOOMBA** QLD 4350  
Tel: 07 4699 9666 | Fax: 07 4699 9699  
E: [salestwba@orrcon.com.au](mailto:salestwba@orrcon.com.au)

17 Leyland St,  
**TOWNSVILLE** QLD 4814  
Tel: 07 4779 1888 | Fax: 07 4779 1022  
E: [salestville@orrcon.com.au](mailto:salestville@orrcon.com.au)

### NSW

Cnr. Glendenning Rd & Lamb St,  
**GLENDENNING** NSW 2761  
Tel: 02 9675 9555 | Fax: 02 9675 9900  
E: [salesnsw@orrcon.com.au](mailto:salesnsw@orrcon.com.au)

### SA

123-131 Bedford St,  
**GILLMAN** SA 5013  
Tel: 08 8245 5900 | Fax: 08 8245 5910  
E: [salessa@orrcon.com.au](mailto:salessa@orrcon.com.au)

### VIC

5 Cambria Rd (Cnr Bridge Rd),  
**KEYSBOROUGH** VIC 3173  
Tel: 03 9238 2544 | Fax: 03 9238 2505  
E: [salesvic@orrcon.com.au](mailto:salesvic@orrcon.com.au)

### WA

25 Cocos Dr,  
**BIBRA LAKE** WA 6163  
Tel: 08 9437 7111 | Fax: 08 9437 7199  
E: [saleswa@orrcon.com.au](mailto:saleswa@orrcon.com.au)

Lot 557 Valencia Way,  
**MADDINGTON** WA 6109  
Tel: 08 9452 1807 | Fax: 08 9452 1861  
E: [salesmaddington@orrcon.com.au](mailto:salesmaddington@orrcon.com.au)

12 Denninup Way,  
**MALAGA** WA 6090  
Tel: 08 9249 5592 | Fax: 08 9248 5191  
E: [salesmalaga@orrcon.com.au](mailto:salesmalaga@orrcon.com.au)

12 Gibbons Rd,  
**BUNBURY** WA 6230  
Tel: 08 9724 7500 | Fax: 08 9725 6544  
E: [salesbunbury@orrcon.com.au](mailto:salesbunbury@orrcon.com.au)

22 Fitzgerald Rd,  
**MANDURAH** WA 6210  
Tel: 08 9582 6900 | Fax: 08 9582 6999  
E: [salesmandurah@orrcon.com.au](mailto:salesmandurah@orrcon.com.au)



we'll see it through

