

Job Name:  Fixture Type:  Qty:

## Energy Efficient MR16 by Times Square Lighting



### S164 MR16 Quad



The S164 is a low voltage MR16 fixture with integral electronic transformers, and four adjustable lamp holders. These lamp holders can be moved on both the x and y axis allowing you to alter the beam spread of the fixture. The S164 lamp holder can also accept glass filters, diffusion, louvers and snoots.

This unit is ideal as a wall wash in an architectural atmosphere, or as a border / footlight in a theatrical setting. Numerous mounting options are available.

#### Features:

- 120, 220 and 277-volt available
- Adjustable lamp holders
- Integral 12-volt dimmable transformers
- Accepts energy efficient MR16 lamps from 20 to 50-watts
- Numerous mounting options and accessories

Manufactured in the USA - IBEW

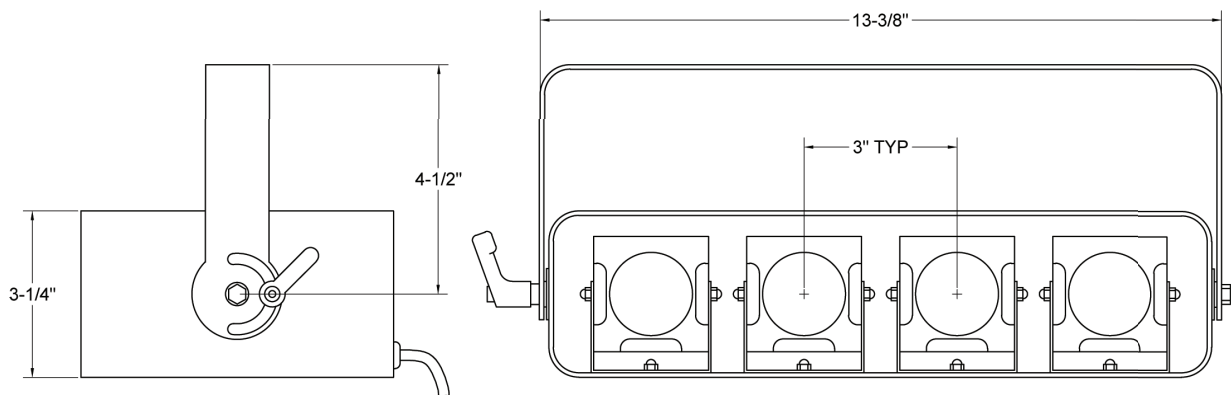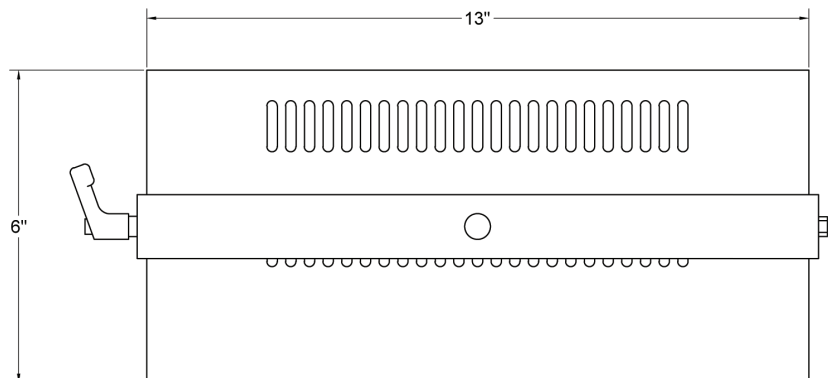

Last updated 08/11/2009.

Specify:	S164	-	-	-
	MODEL NUMBER	FINISH	MOUNTING (optional)	ACCESSORIES (optional)
Example:	S164	-B	-T1	-LV22

## MR16 Glass Cover Lamp Types

**BBF/FG/ULTRA** 20W; 10,000Hrs; 24°  
Beam; 3100°K Color Temp

**BAB/FG/ULTRA** 20W; 10,000Hrs; 36°  
Beam; 3100°K Color Temp

**FMV/FG/ULTRA** 35W; 10,000Hrs; 24°  
Beam; 3100°K Color Temp

**FMW/FG/ULTRA** 35W; 10,000Hrs; 36°  
Beam; 3100°K Color Temp

**FMW/60/FG/ULTRA** 35W; 10,000Hrs;  
60° Beam; 3100°K Color Temp

**EXT/FG/ULTRA** 50W; 10,000Hrs; 12°  
Beam; 3100°K Color Temp

**EXZ/FG/ULTRA** 50W; 10,000Hrs; 24°  
Beam; 3100°K Color Temp

**EXN/FG/ULTRA** 50W; 10,000Hrs; 36°  
Beam; 3100°K Color Temp

**FNV/60/FG/ULTRA** 50W; 10,000Hrs;  
60° Beam; 3100°K Color Temp

## Accessories

LV22	Louver
HD22	Hood
CF22	Color Frame
GF22	Glass Color Filter
DF22	Dichroic Color Filter
GF22-600	5°x50° Linear Lens
GF22-601	Beam Softener
GF22-673	50°x50° Spread Lens
GF22-702	UV Blocking Filter
SC	Safety Cable

## Finish

B	Black
W	White
S	Silver
CC	Custom Color

## Mounting Options

### TA2S

Track adapter for specification grade  
2-circuit track.

### HTA2

Track adapter for specification grade  
2-circuit 277-volt track.

### TA3

Track adapter for specification grade  
3-circuit track.

### US1

Unistrut adapter.

### MN

Medium duty pipe clamp for pipes up to  
2" O.D.

### PC9M

Heavy duty pipe clamp for pipes up to  
2" O.D.

### CM4

6" Canopy for permanent mounting on  
standard 4" octagonal outlet boxes.

### TB8

8" Portable wall mount/table base for  
floor, wall or table use.