

40W to 100W



Approvals:

CSA Certified to C22.2 #250

Suitable for outdoor use and wet locations.



DESCRIPTION

The F21M-I Series Compact Floodlight deliver up to 100 watts of light from a well designed reflector ideally suited for mounting on the side of buildings, poles or ground mount.

EPA: 1.09 ft²

LAMP AND BALLAST

- Estimated life of lamp is 100,000 hours
- Estimated life of generator is 60,000 hours
- Electronic ballast features high power factor (>0.95), flicker free, instant on/ instant re-strike
- Color temperature: 5000K (other colors available upon request)

POWER RANGE

40W to 100W rectangular induction lamp.


CORROSION-RESISTANT HOUSING

Made of corrosion-resistant die-cast aluminum in an architectural bronze standard polyester powder coat finish, the F21M-I compliments most architectural settings. The front lens is easily opened by two captive screws. It is hinged for easy lamp replacement. For special color, contact factory.

MOUNTING

Utilizing a heavy gauge universal mounting yoke and post top fitter, the F21M-I mounts on a standard box, and aims to any vertical degree. It is suitable for wall canopy, ground and pole mounting.

DIMENSIONS

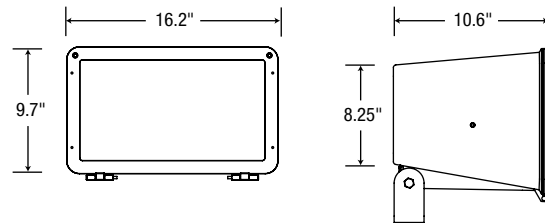

ORDERING GUIDE

| Series | Lamp type | Wattage | Voltage | Lamp color temperature (mandatory selection) | Options |
|--------|---------------|---|--------------------------------|--|---|
| F21M | I - Induction | 0040 - 40W rectangular 0080 - 80W rectangular 0100 - 100W rectangular | 12 - 208-347V* 2 - 120-277V | 41K - 4100K* 50K - 5000K (standard) 65K - 6500K* | G - Wireguard L - Polycarbonate lens P_____ - Photocell (specify input voltage) T - Glare shield CL - Cold location (-40°C) |

* Consult factory.