PO # _____

INSIDE FRAME OPENING SIZE X	HARDWARE GROUP/SET	FIRE DOOR LABEL UL 20 / 30 / 45 / 60 / 90	FBC LABEL	DESIGN OR DOOR ELEVATION	GELCOAT POLYURETHANE
PREFIT DOOR SIZE X	THICKNESS	CORE FOAM HONEYCOMB BALSA MINERAL	FACE SHEET SMOOTH PEBBLE WOODGRAIN	COLOR	

HINGES CORRIM STD LOC (FENESTRA)

SIZE

GAUGE/MFG. NO.

CONTINUOUS MFG #

TEMPLATE NO.

TOP OF DOOR TO TOP OF HINGE

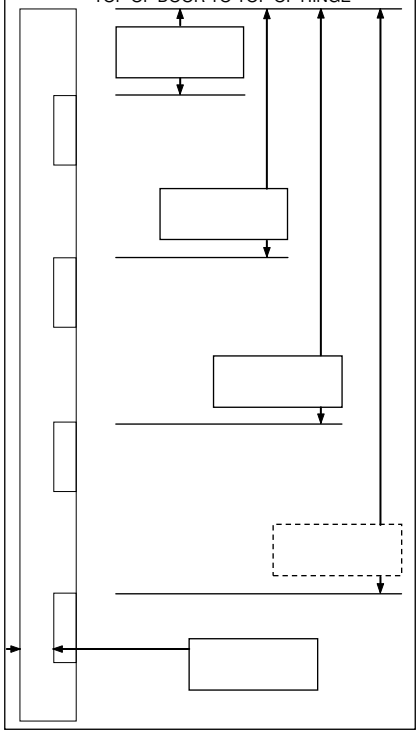

LOCK CORRIM STD LOC (FENESTRA)

MFG. NO.

TEMPLATE NO.

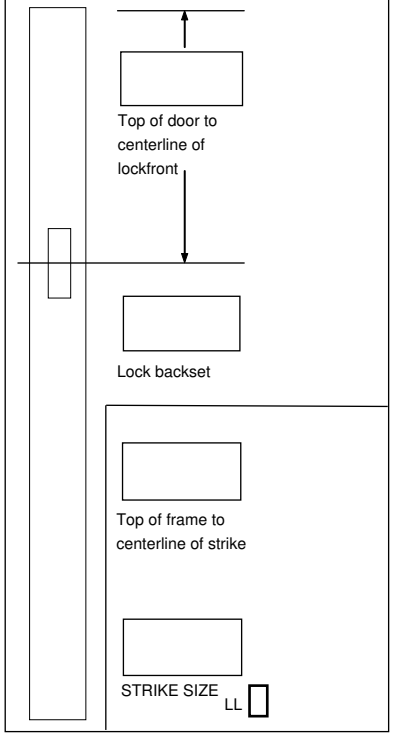

SAME LOCATIONS AS PREVIOUS SHEET

LITE VISIBLE CUTOUT

SIZE W _____ x L _____

LOCKSTILE _____ (6" CUTOUT MARGIN TYPICAL)

TOP RAIL _____ (8" CUTOUT MARGIN TYPICAL)

KIT TYPE _____

GLASS TYPE _____

GLASS THICKNESS _____

FACTORY INSTALL YES NO

SURFACE CLOSER BLOCKING IS STANDARD

FLUSH BOLTS

MORTISE HOLDER/STOP-DEGREE OF OPG.-TEMP.

OTHER HARDWARE/REMARKS

LOUVER VISIBLE CUTOUT

SIZE W _____ x L _____

LOCKSTILE _____ (6" CUTOUT MARGIN TYPICAL)

BTM. RAIL _____ (12" CUTOUT MARGIN TYPICAL)

WITH FRP BUG SCREEN YES NO

DOOR NO.	TOTAL DOORS THIS PAGE _____	HANDING

CORRIM Company

Order Form

FRAME BY CORRIM YES NO

STD 5 3/4" X 2"

MODIFIED _____ X _____

4" HEADER / MOD. HEADER _____

WALL MATERIAL _____

ANCHOR TYPE _____

NEW BUTT

EXISTING WRAP

FACTORY RESIN BONDED (NON-RATED ONLY)

YES NO