




INPRO/SEAL[®]

A DOVER COMPANY

BEARING ISOLATOR REQUEST FOR QUOTE

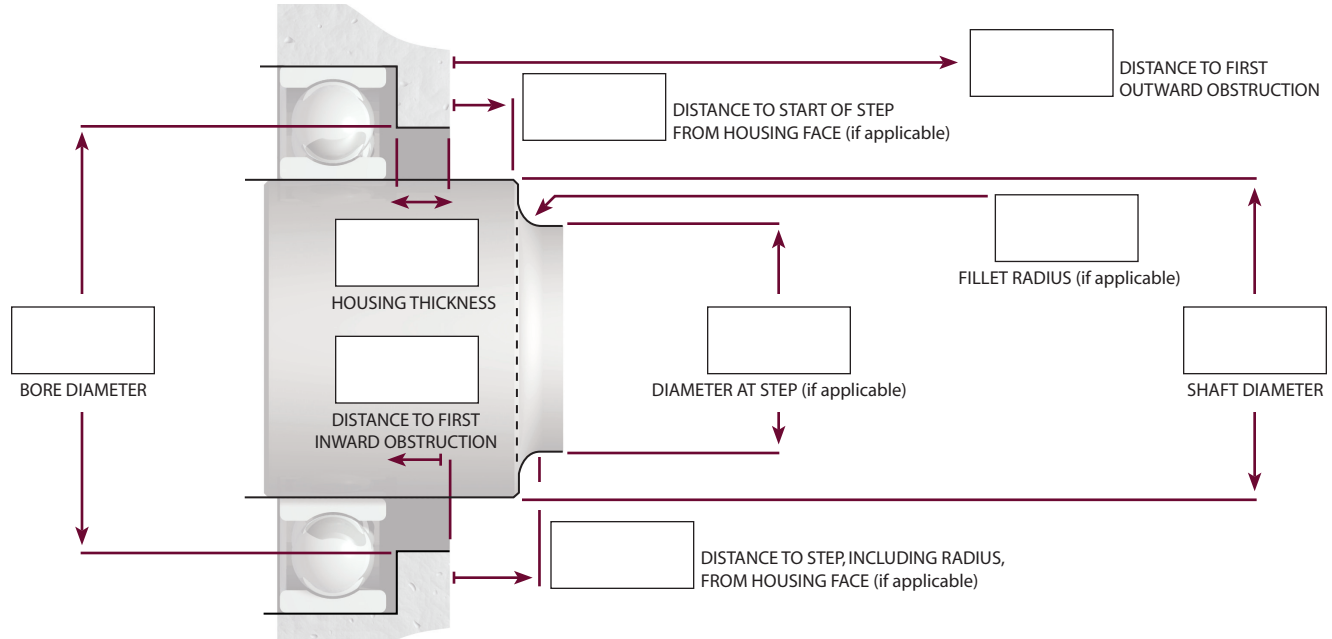

MEASUREMENTS ARE IN: US STANDARD METRIC

PLEASE SUPPLY ALL DIMENSIONS TO 3 DECIMAL PLACES

Data Needed For Quote

APPLICATION: Pump Motor

Other:

CURRENT SEALING SOLUTION: Lip Laby

Other:

SHAFT POSITION: Horizontal Vertical Up Vertical Down

BEARING TYPE: Bal Sleeve Roller

MOUNTING: Standard Press-Fit Flange

Other:

PRIMARY FOCUS: Contamination Lube Retention Both

LUBE: Oi (level):

Grease Oil Mist Forced Oil System

FIRST OBSTRUCTION: Outward Inward Step On Shaft

AXIAL MOVEMENT:

SHAFT SPEED:

MISALIGNMENT:

Diametric Run Out > .005" [0,13mm] TIR? Yes No

Shaft To Bore Misalignment > .007" [0,18mm] TIR? Yes No

TEMPERATURE AT SEAL LOCATION:

ENVIRONMENT:

SEAL HOUSING: Solid Split

SEAL TYPE: Solid Split

CONSTRUCTION MATERIAL: Bronze Stainless

Other:

TOTAL PIECES OF EQUIPMENT:

BRIEFLY DESCRIBE THE APPLICATION

CONTACT INFORMATION

Name:

Company Name:

Contact Number:

Email Address:

Date: