

Create your part-number by filling in the chart on the following page.


GENERAL OPTIONS



36" radius ARQs in Emerald fabric, LED, aircraft cable mount and opal lens



48" radius ARQs in 8 ft. circular formation, Surf fabric, LED, aircraft cable mount and opal lens

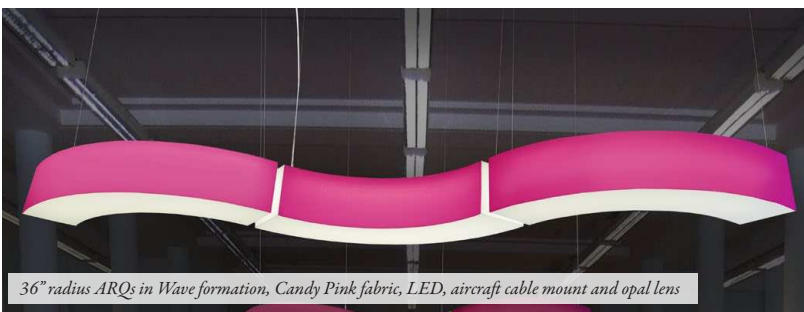

36" radius ARQs in Wave formation, Candy Pink fabric, LED, aircraft cable mount and opal lens

Please see website or catalogue for full listing of fabric colours, prints and trims.

SHADE MATERIAL

- LF - Standard laminated fabric
- LFPS - Printed shade with white fabric backer*
- LPS - Printed shade with opal backer (includes printed wood)*
- FF - Fabric Free, no fabric or printing

SHADE COLOUR/PRINT*

- LF# - Standard Lam. Fabric Colour #
- PS# - Print #, send colour choices
- PW(G#/S#) - Printed Wood, grain # and stain #
- CUSTPRINT - Custom Print, provide graphic file
- FFOA - Fabric Free, Laminated Opal

*Customers are responsible for acquiring licensing rights and paying licensing fees relating to graphics or artwork not included in the Barbican catalogue.

WIDTH/HEIGHT

- 10"

MOUNTING

- ACB - Aircraft cable, 10 ft, black power cord
- ACW - Aircraft cable, 10 ft, white power cord
(includes 1" spacers for adjacent mounting)

BOTTOM LENS

- HTO - High Transmission Opal (std.)
- OA - Opal Lens
- DTC - Double Textured Clear

FINISH (Ceiling canopy only)

- WHT - White, Polyester Powder Coat (std.)
- BA - Brushed Aluminum (std.)
- RAL - RAL Colour, from RAL chart
- PF - Plated Finishes, consult factory
- CUST - Custom, colour match

SOURCE

- Integral electronic driver
LED *(see note below)*
- 72W (per unit)

VOLTAGE

- INC: 120V
- CFL, LED: 120V, 277V

OPTIONAL

- DB - Dimming ballast/driver
-Provide manufacturer's model number for pricing and voltage options.
-For a list of compatible dimming ballasts, see back of catalogue, or visit www.barbican.ca.

Not exactly what you're looking for? Please contact us with your custom requirements.

• Web: www.barbican.ca • Email: info@barbican.ca • Telephone: 1-800-663-5781 • Fax: 905-991-9708


SIZE-SPECIFIC OPTIONS

Please select options specific to the chosen diameter and height.

MODEL CODE

16-2836

16-2848

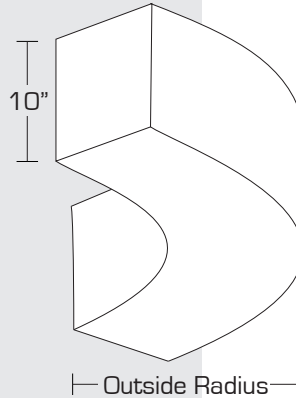

OUTSIDE RADIUS

36"

48"

NUMBER OF ARQS

Specify the total number of Arq fixtures.
Submit a drawing of the desired formation.

NOTE:

36" ARQs require 4 units to make a circle (6 ft.)

NOTE:

48" ARQs require 6 units to make a circle (8 ft.)

EXPOSED END LENSES

Standard:

- HTOE - High Transmission Opal

Other:


- OAE - Opal
- LFE - Laminated Fabric

Standard:

- HTOE - High Transmission Opal

Other:

- OAE - Opal
- LFE - Laminated Fabric

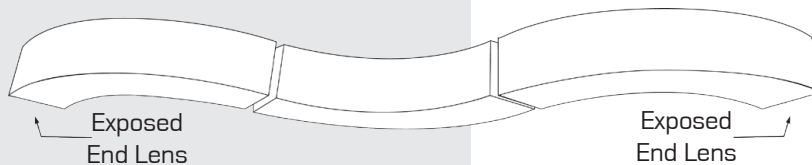

BUILD YOUR PART-NUMBER

MODEL CODE	SHADE MATERIAL	SHADE COL/PRINT	___ pcs	MOUNTING	BOTTOM LENS	END LENSES	FINISH	LED72W SOURCE	VOLTAGE	OPTIONAL
16-2836 16-2848	LF LFPS LPS FF	LF# PS# PW(G#/S#) CUSTPRNT FFOA	Specify total number of Arq fixtures (Submit drawing)	ACB ACW	HTO OA DTC	HTOE OAE LFE	WHT BA RAL PF CUST	LED 72W (per unit)	120V 277V	DB

Please note that not all of the above product configurations have been built. Products and lead times may vary. Specifications subject to change without notice. Please visit our website for the most current specifications and to build part numbers.