


Ordering Information

Style

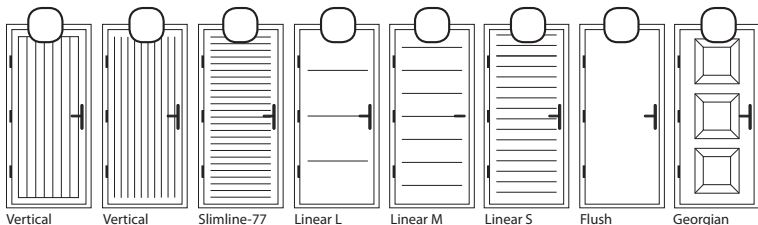

Vertical Tongue & Groove    Vertical Boarded    Slimline-77    Linear L    Linear M    Linear S    Flush    Georgian

Size (refer to notes top right)

Panel

Insulated   
Single Skin

Overall frame width (FW) .....

Overall frame height (FH) .....

Mounting

Opening

Between Brickwork     Outward

Behind Brickwork\*     Inward

Back fixing kit     When viewed from outside the garage

\*A back fixing kit will be required.

Hinge Side

L     R     When viewed from outside the garage

Threshold

Standard 15mm low profile

Optional 30mm ramped

Colour

White     Rosewood (foil)

Golden Oak (foil)\*\*     Black (foil)

Anthracite (foil)

Custom colour, RAL or B.S. number:

\*\*Georgian style not available in Golden Oak

Options

Rain Guard (top of door)

ERA™ anti-bump cylinder

Hoppe™ door closer

Handles (black standard)

Black (standard)

Silver Satin

Smoked Chrome

White

Windows

Stainless Steel: Round     Square     Glass: Clear     Obscure



Specification & Survey Form

Customer Name: .....

Address: .....

Postcode: .....

Tel Mobile: .....

Tel Office: .....

P.O. / Order Reference .....

Email: .....


Sizing Notes

**IMPORTANT: NO FITTING CLEARANCE IS INCLUDED IN SIZES**


**Fixing between brickwork:**  
Recommended ordering size is the minimum structural opening width minus 15mm and height minus 10mm.

**Fixing behind brickwork:**  
15mm must be allowed at the sides and head for outward opening doors. See figure 2.

Dimensions

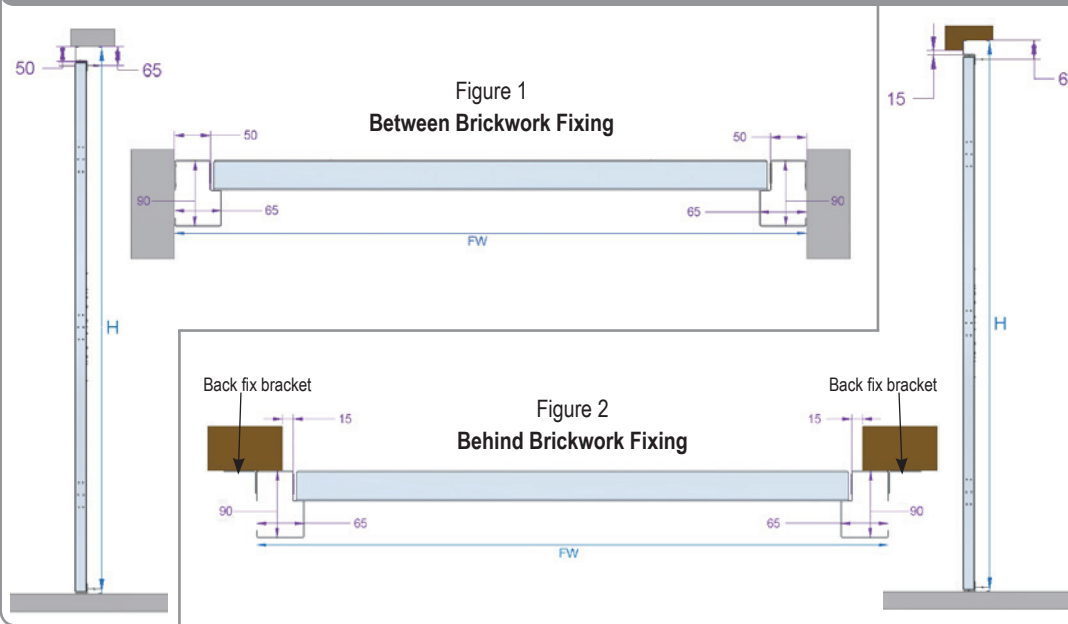

Terminology & Clearances

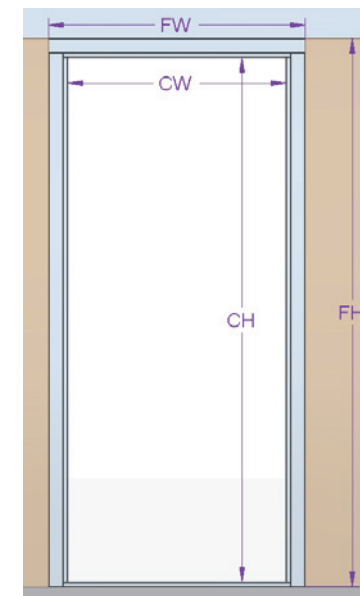

- FW** Overall frame width
- CW** Clear passage width = FW - 127mm
- FH** Overall frame height
- CH** Clear passage height = FH - 80mm  
For standard 15mm low profile threshold
- CH** Clear passage height = FH - 90mm  
For optional 30mm ramped threshold

Thresholds

