


Phone: (800) 670 9475 Fax: (763) 428 5111

sales@twincityhose.com

20615 Commerce Blvd. Rogers, MN 55374

MRCE

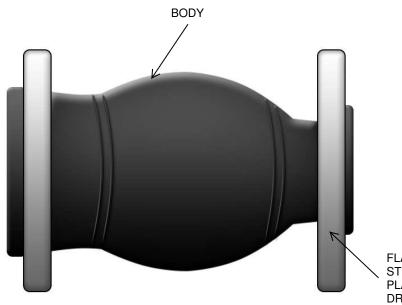

PIPE	PSI			
SIZE	. 0.			
1"- 4"	180			
5"- 10"	135			
12"-14"	90			
16"-24"	45			

^{*} USE CONTROL RODS IF PSI IS AT OR EXCEEDS RATINGS IN CHART

FLANGES-PLATE STEEL CADMIUM PLATED 150# ASA DRILLING, FLOATING

NOTES:

Max negative pressure 26" HG vacuum.

Pressure rating is based on 170°F operating temperature. Minimum burst pressure is 4:1 Angular movement is from a neutral position and can increase in conjunction with compression

QTY	MODEL	Large	Small	OAL	AXIAL	AXIAL	LATERAL	ANGLE	WRK.
	NUMBER	End ID	End ID		COMP.	EXT.	DEFLECT	DEGREE	PRESS
	MRCE0302	3"	2"	8"	1/2"	1/4"	1/2"	11.3º	200
	MRCE0325	3"	2 ½"	8"	1/2"	1/4"	1/2"	10.3º	200
	MRCE0402	4"	2"	8"	1/2"	1/4"	1/2"	9.5⁰	200
	MRCE0403	4"	3"	8"	1/2"	1/4"	1/2"	8.1⁰	200
	MRCE0604	6"	4"	8"	1/2"	1/4"	1/2"	5.7⁰	190
	MRCE0804	8"	4"	8"	3/4"	3/8"	1/2"	7.1º	190
	MRCE0806	8"	6"	8"	3/4"	3/8"	1/2"	6.1⁰	190
	MRCE0108	10"	8"	8"	3/4"	3/8"	1/2"	4.8⁰	190

RAWN BY:	DRAWING NUMBER: REV:
SIGNATURE:	DATE:
PO NUMBER:	PROJECT:
CUSTOMER:	NOTES: