


## Remodel Housing w/ PAR20 Baffle

### LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (PAR16/PAR20)

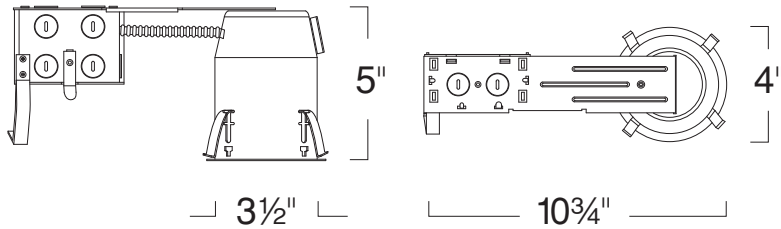

#### SPECIFICATION

Ceiling cut-out: 3 3/4"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** IC rated for 12W LED or lower. Non IC rated for more than 12W housing must be kept 3" from insulation.

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

#### FEATURE:




**Application:** For accent and task lighting applications. The 3" baffle trim with its clean and durable die-cast construction provides a smooth illumination in short throw distances such as soffits and counters.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Application:** For general and task lighting applications. One of the smallest line voltage downlights, the 3" trim, with its clean and durable die-cast construction, provides a smooth illumination in short throw distances such as soffits and counters.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: cETL Listed

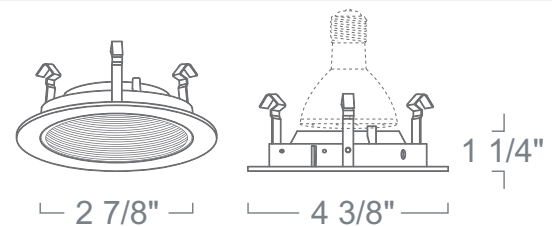

#### REMODEL HOUSING

**LH3R** 120V 50W Max PAR20/PAR16 MED E26

RATING	
LH3R	:Standard
LH3RA	:Airtight

#### PAR20 BAFFLE

**LR323** 120V 50W Max PAR20/PAR16

FINISH	
LR323W	:White Baffle & Ring
LR323B	:Black Baffle/White Ring
LR323N	:Natural Metal Baffle & Ring
LR323CO	:Copper Baffle & Ring
LR323MO	:Mocha Baffle & Ring

Ordering example: LH3R/LR323W