

Planters

Implements

Disc Blades

Tillage  
Tools



# 6010 GAICRL

## Wheel Offset Disk Harrow

**Working Width**  
**06 to 10 ft.**

*Disc Spacing 10.1/2" (270 mm)*  
*Round Axles 1.5/8" (41.28 mm)*  
*Equipped with dual roller bearings.*



**Specially designed for primary tillage**  
**in new cleared forest areas or heavy sugar**  
**cane stubble left after the last ratoon crop.**

**RUGGEDLY BUILT**  
**FOR LONGER LIFE**



## Standard Features:

- TATU - 262 x 1.5/8" oil bath bearings assemblies with tapered roller bearings, duo-cone seals and wear plates.
- 1.5/8" (41.28mm) round heat-treated alloy steel axles.
- Cast iron spacer spools, 10.1/2" (270mm).
- 24" x 6.00mm Notched disc blades on front and rear.
- Adjustable disc blades scrapers.
- Two singles 750 x 16 - 10 ply rib implement tires.
- Hydraulic control group includes hydraulic cylinders, hose holder and hoses with fittings and quick couplers to reach the rear of tractor.
- Hardened bushings and pins on all cylinder pivot points.
- Depth control adjustment.
- Rigid frame.
- Drawbar jack.
- Lock pins wheels for transport in raised position.
- Wheel hubs with two tapered roller bearings on each hub protected against dust and moisture.
- Adjustable gang angles of 18 to 22 degrees.

## Specifications:

Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing		
<b>6010 GAICRL</b>	<b>16</b>	<b>6 ft. 7" (2,000)</b>			<b>3,173 (1,440)</b>	<b>50 - 65</b>
	<b>18</b>	<b>7 ft. 7" (2,300)</b>			<b>3,442 (1,562)</b>	<b>65 - 75</b>
	<b>20</b>	<b>8 ft. 5" (2,570)</b>	<b>24"x6.0mm</b>	<b>10.1/2"</b>	<b>3,605 (1,636)</b>	<b>70 - 75</b>
	<b>22</b>	<b>9 ft. 4" (2,840)</b>		<b>(270mm)</b>	<b>3,768 (1,710)</b>	<b>75 - 80</b>
	<b>24</b>	<b>10 ft. 2" (3,109)</b>			<b>3,931 (1,784)</b>	<b>80 - 85</b>

\* Approx. Net Weight with 24" x 6.0mm disc blades


Depth of Cut: 3" to 6" (80 to 160mm)

\*\* Please note that the tractor draw bar horse power are suggested ranges and vary according to soil conditions and weight added to harrow.

## RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

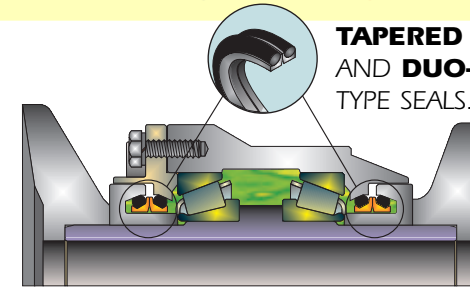

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.



Planters

Implements

Disc Blades

Tillage Tools



**MARCHESAN**

### MARCHESAN - TATU PRODUCTS

Av. Marchesan, 1979 - P.O. Box 131 - ZIP 15994-900 - Matão-SP-Brazil

Fone: (55) 16 3382-8282 - Fax: (55) 16 3382-1003 / 3382-3607

[www.marchesan.com.br](http://www.marchesan.com.br)

e.mail: [tatu@marchesan.com.br](mailto:tatu@marchesan.com.br)

MARCHESAN S.A. reserves the right to improve or modify its products, changing the specifications, without previous notice. - 08/2005 - Edition 02