

DL400 SE Slimline timeflow shower panel

Features and Benefits

- Prefabricated shower
- Adjustable anti-scale shower head including flow regulator
- Ergonomic push button
- Timed flow control set to 30 seconds as recommended in BS EN 816
- Easy and quick to install
- Low profile



Description

A self contained one piece timeflow shower panel, with an anti-scale shower head, incorporating a 10lpm flow regulator, comes complete with all necessary wall mounting fittings. The panel comes in a grey aluminium finish and has a specially designed ergonomic push button for easy operation. The panel's low profile and quick installation make it ideal for group showering installations.

SHOWER PANEL Specification Sheet



The Safety Valve Specialist

Specifications

| | |
|---------------------------|----------------|
| Connection for top inlet | 15mm |
| Connection for back inlet | ½"MBSP |
| Pre-set flowrate | 10 lpm at 1bar |
| Minimum pressure | 0.8bar |
| Maximum working pressure | 5bar |
| Maximum temperature | 80°C |
| Timed flow duration | 30 seconds |

Approvals

WRAS approval application pending


Standards

BS EN 816


Product Codes

| | | |
|--------------|-----------------------------------|--------|
| PANL 400 000 | DL400 SE Exposed panel top inlet | 15mm |
| PANL 400 020 | DL400 SE Exposed panel back inlet | ½"MBSP |

Typical Installation

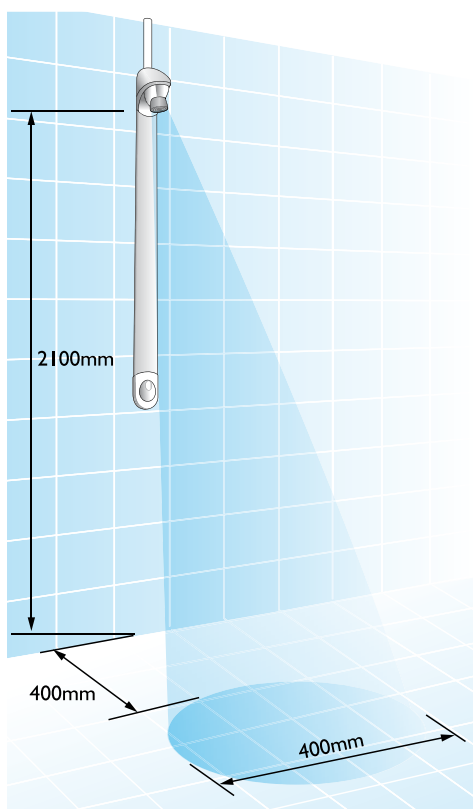

Dimensions

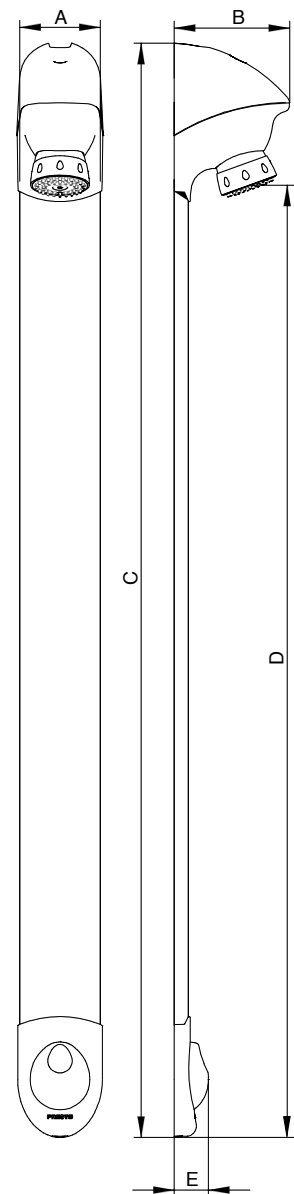

| Model | A | B | C | D | E |
|---------|----|-----|------|------|----|
| DL400SE | 80 | 115 | 1090 | 2100 | 34 |

All dimensions shown in mm unless otherwise stated

Reliance Water Controls Ltd
A Reliance Worldwide Company

Worcester Road, Evesham, Worcestershire, WR11 4RA, UK. UK – Freephone: 0800 389 5931
Freefax: 0800 389 5932 Outside UK – Tel: +44 (0)1386 712400 Fax: +44 (0)1386 712401 Email: sales@rwc.co.uk

www.rwc.co.uk