

SIRCO MC PV Disconnect switches for photovoltaic applications up to 45 A, up to 1000 Vdc UL 508i & IEC 60947-3





Your guarantee for safe & reliable switching of photovoltaic circuits

Taking into account the specificity and technical constraints of solar applications, SOCOMEC was the first manufacturer to release real PV-specific disconnect switches certified by UL, according to UL98B. The SIRCO MC PV follow the same trend and are tested according to the latest industry standards.

Our complete range of PV disconnect switches is fully tested and certified according to the relevant standard for PV applications; this is our commitment to quality and performance.



Save time

Multiple mounting options facilitate easy integration into standard off the shelf enclosures or your custom designs.

Save space

The compact design ensures the **optimum use** of valuable space in the PV inverter or associated local enclosure.

Rationalize your equipments

The same product can be used to ensure that your standard design **conforms to all major international standards and approvals** including UL, IEC and CCC.



To find out more

Visit our website;

www.socomec.fr/en/sircomcpv



2

SIRCO MC PV

UL and IEC Disconnect switches for photovoltaic applications From 25 to 45 A - 600 & 1000 Vdc

Specifically designed for photovoltaic applications, the SIRCO MC PV disconnect switches have been tested for use in applications with high performance characteristics that exceed the requirements of the latest industry standards.

Thanks to its very small size, the **space constraint is largely reduced**, which will allow the usage of much smaller enclosures.

The versatility of the solution, both in terms of installation possibilities and switching options, will make the SIRCO MC PV fit perfectly in your photovoltaic application.



SOCOMEC, your best asset

SOCOMEC is an industrial group specialized in the availability, control and safety of low voltage electrical energy which meets the requirements of the industry and service sectors. As a manufacturer with complete control over its technological processes, SOCOMEC is constantly improving its fields of expertise in order to offer its clients increasingly customised and appropriate solutions. As a recognized world leader in photovoltaic applications, SOCOMEC is offering you a full range of PV disconnect switches perfectly adapted to your needs.



The advantages of SIRCO MC PV

Several switching options

Multiple circuit




Due to its high performance the product for 2 circuits (2 MPPT, Multiple Power Points Tracking) allows the current interruption of two strings under higher voltage using a single compact switch. This improves ergonomics, reduces overall product size, and improves safety.

 Completely isolate the inverter within one operation




One single device can switch both DC and AC circuits, reducing the overall need for space within the inverter and allowing a voltage free maintenance of the inverter. For grounded or ungrounded networks

It is possible to use the SIRCO MC PV in both network systems, either switching one single polarity or both polarities.




Ungrounded system, both polarities are switched.



Grounded system, only one polarity is switched.

SPONCORA A

2MPPT switch, 2 circuits are switched together.



DC and AC circuits are switched with one handle.

Enclosed SIRCO MC PV

SIRCO MC PV is also available in non metallic polycarbonate 4x enclosure.



NEC and photovoltaic



4

Most of the PV systems fall under the provisions of the National Electrical Code (NEC). The requirement for disconnects for PV systems are covered in Article 690 of the National Electrical Code. NEC limits one and two family dwellings, with certain limitations, to 600 V. Other installations with maximum photovoltaic system voltage over 600 Vdc shall comply with Article 690, Part IX.

However, if the most common voltage is still below 600 Vdc, the trend is for higher voltage in order to improve the efficiency of the system.

Various mounting options

· Base mounting

The SIRCO MC PV exists for back plate mounting by means of screws and on DIN rail. This mounting enables quick and efficient installation.



Direct operation

The handle is mounted directly on the switch which can only be operated when the door is open. Modular 45 mm cutout enables integration in modular type panels. The switch must be located behind a hinged cover.

Panel mounting

The switches can be mounted on the door without tools. The switch body is attached to the inside of the enclosure door.



Quickfix

Once the handle is fitted on the door by means of a nut, handle and switches are assembled through a quarter turn fixation.

The standards for PV disconnect switches

USA

- UL98B; Disconnect switches for photovoltaïc systems, usually for rating above 40 A.
- UL508i; Manual disconnect switches for photovoltaic systems, usually for ratings up to 40 A.
- UL1741; Inverters and interconnection system equipment.

Worldwide

 IEC 60947; Low-voltage switchgear and controlgear.
Part 3; Switches, disconnectors, switch-disconnectors and fusecombination units.






External dead front handle The handle is mounted on the door and is connected to the switch when the door is closed.



Standard door mounting This type of mounting is a cost effective and simple solution. The switch is fixed using a nut on the external side of the door.


Space saving

The compact design ensures the optimum use of valuable enclosure space. The SIRCO MC PV is easy to install in the



Base mounting.

modern small photovoltaic inverter where space means cost and competitiveness.




Panel mounting.

5

The selection guide



SIRCO MC PV Solar Disconnect Switch

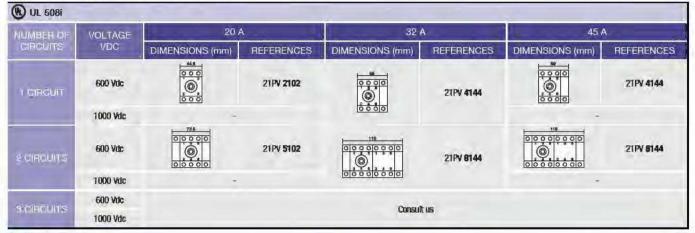

IEC 60947-3

| NUMBER OF CIRCUITS | VOLTAGE VDC | 25 A | | 30 A | | 40 A | | |
|-----------------------|----------------|-----------------|------------------|-----------------|-------------------|---------------------------------------|------------|--|
| | | DIMENSIONS (mm) | REFERENCES | DIMENSIONS (mm) | REFERENCES | DIMENSIONS (mm) | REFERENCES | |
| 1 GIRGUN | 600 Vdc | | 21PV 2102 | | 21 PV 2102 | 45 0 0 0 0 0 0 0 | 21PV 3124 | |
| | 1000 Vdc | | 21PV 3722 | - | | | 21PV 4754 | |
| е сисыта | 600 Vdc | | 21PV 5102 | | 21PV 5102 | | 21PV 6124 | |
| | 1000 Vdc | | 21PV 6722 | 4 | | | 21PV 8154 | |
| 3 GROUNS | 600 Vdc | | Consult us | | | | | |
| | 1000 Vdc | | Providence and | | | | | |

All references are for back plate / DIN rail mounting and ungrounded systems (2 polarities switched), Door mounting and grounded system (1 polarity switched) references are also available, please contact us.



Direct operation

| SWITCH MOUNTING | TYPE | COLOUR | REFERENCES |
|---------------------|------|--------|------------|
| Back plate/DIN rail | MC01 | Black | 2119 1012 |

External operation

| HANDLE | | | | SHAFT | | ACCESSORIES | |
|---------------------|-------------------|------------|------------|---------------------|----------------------------|----------------------------------|--------------------------|
| SWITCH MOUNTING | ТҮРЕ | COLOUR | REFERENCES | SHAFT REFERENCES | LENGHT (switch + shaft) | AUXILIAIRY CONTACT (NO+NC) | BRIDGING BAR (10 pcs) |
| | MC1 | Black | 2119 3312 | 2107 0517 % | 265 mm | 2119 0001 | 2109 0005 ® |
| | | Red/yellow | 2119 3313 | | | | |
| Back plate/DIN rail | S00 ^{ra} | Black | 147D 1111 | | | | |
| | | Red/yellow | 147E 1111 | | | | |

(1) With door interlock. (2) To switch single polarity, a bridging bar shall be added on the product. Please consult us on UL/IEC connection of ungrounded systems. (3) IEC only.


5

The SIRCO range


A complete offer for the photovoltaic applications from 16 A to 2500 A

As experts in the solar energy equipment field, SOCOMEC has the specialized know-how for implementing key strategic functions in PV facilities, including safety, through specially designed switch disconnectors to interrupt the DC current generated by solar panels regardless of the facility configuration and operating conditions.

Typical electrical distribution of a residential installation



Typical electrical distribution of a large PV installation

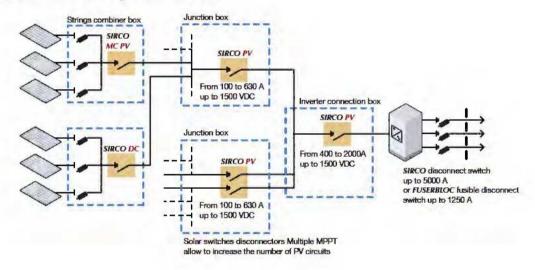

Also available

SIRCO DC PV up to 2500 A

SIRCO DC disconnect switches are heavy duty switches that break and make up to 1500 Vdc photovoltaic circuits on load.

They are suitable for use in accordance with NEC Article 690 photovoltaic installations and Application UL1741.



Other UL products

- SIRCO M; Manual motor controller from 16 to 80A
- SIRCO; AC disconnect switches from 30 to 1200A
- FUSERBLOC; Fusible disconnect switches from 30 to 800A
- SIRCOVER; Manual transfer switches from 100 to 1200A
- DIRIS; Multi function metering devices



BICO-MIC 006 A GB

Socomec worldwide

IN EUROPE

BELGIUM

UPS / Power Control & Energy Efficiency / Solar Tel. +32 2 340 02 30 Fax +32 2 346 28 99 info.be@socorrec.com

FRANCE

UPS / Power Control & Energy Efficiency / Solar Tel: +33 1 45 14 63 00 Fax +33 1 48 67 31 12 dom ups ir@socomec.com

GERMANY

Power Control & Energy Efficiency Tel. +49 7243 65292 0 Fax +49 7243 65292 13 info.scp.de@socorrec.com UPS Tel. +49 621 71 68 40 Fax +49 621 71 68 444 info.uss.de@socorrec.com

ITALY

Power Control & Energy Efficiency Tel, +39 02 98 49 821 Fax +39 02 98 24 33 10 info.scp.it@socomec.com Solar

Tel. +39 0444 598611 Fax +39 0444 598627 info.solar.it@socomec.com

UPS Tel.+39 02 98 242 942 Fax +39 02 98 240 723 info.ups.it@socornec.com

NETHERLANDS

UPS / Power Control & Energy Efficiency / Solar Tel. +31 30 760 0900 Fax +31 30 637 2166 info.nl@socomec.com

POLAND

Power Control & Energy Efficiency Tel. +48 91 442 64 11 Fax +48 91 442 64 19 info.scp.pl@socomec.com UPS

Tel. +48 22 825 73 60 Fax. +48 22 825 73 60 info.ups.pl@sacomac.com

HEAD OFFICE

SOCOMEC GROUP S.A. SOCOMEC capital 10 816 800€ R.C.S. Strasbourg B 548 500 149 B.P. 60010 - 1, rue de Westhouse F-67235 Benfeld Cedex - FRANCE Tel. +33 3 88 57 41 41 Fax +33 3 88 74 08 00 info.scp isd@socomec.com

www.socomec.com

PORTUGAL

UPS / Solar Tel.+351 261 812 599 Fax +351 261 812 570 info.ups.pt@socomec.com

ROMANIA

UPS / Power Conirol & Energy Efficiency / Solar Tel. +40 21 319 36 88 Fax +40 21 319 36 89

info.ro@socomec.com

RUSSIA

UPS / Power Control & Energy Efficiency / Solar Tel. +7 495 775 19 85 Fax +7 495 775 19 85 info ru@socomec.com

SI OVENIA

UPS / Power Control & Energy Efficiency / Solar Tel. +386 1 5807 860 Fax: +386 1 561 11 73

info.si@socomec.com

UPS / Power Control & Energy Efficiency / Solar

Tel. +34 93 540 75 75 Fax +34 93 540 75 76 info.es@socomec.com

UNITED KINGDOM

Power Control & Energy Efficiency Tel. +44 1462 440 003 Fax +44 1462 431 143 info.scp.uk@socomec.com UPS

Tel.+44 1285 863 300 Fax+44 1265 852 304 info.ups.uk@socomec.com

TURKEY

UPS / Power Control & Energy Efficiency / Solar

Tel. +90 216 540 71 20-21-22 Fax +90 216 540 71 27 info.tr@socomec.com

IN ASIA PACIFIC

AUSTRALIA UPS Tel. +61 2 9325 3900 Fax +61 2 9888 9544

rax +61 2 9000 9044 info.ups.au@socomec.com

UPS / Power Control & Energy Efficiency Tel: +86 21 52 98 95 55 Fax +86 21 62 28 34 68 info.cn@socomec.com

INDIA

Power Control & Energy Efficiency Tel. +91 124 4027210 Fax +91 124 4562738 info.scp.in@socomec.com UPS / Solar Tel. +91 44 39215400 Fax +91 44 39215450 & 51 info.ups.in@socomec.com info.solar.in@socomec.com

SINGAPORE

UPS / Power Control & Energy Efficiency Tel.+65 6506 7600 Fax +65 64 58 7377 into.sg@socorrec.com

THAILAND

UPS Tel. +66 2 941 1644 7 Fax +66 2 941 1650 info.ups.th@socomec.com

VIETNAM

UPS Tel. +84 8 3559 1220 Fax +84 8 3559 1221 info.ups.vn@socomec.com

IN MIDDLE EAST

UNITED ARAB EMIRATES UPS / Power Control & Energy Efficiency / Solar Tel.+971 4 29 98 441 Fax +971 4 29 98 449 info.ae@socomec.com

IN AMERICA

USA, CANADA & MEXICO Power Control & Energy Efficiency Tel. +1 617 245 0447 Fax +1 617 245 0437 info us@socomec.com

OTHER COUNTRIES

NORTH AFRICA

Algeria / Morocco / Tunisia info.naf@socomec.com

AFRICA Other countries info.africa@socornec.com

SOUTH EUROPE Cyprus / Greece / Israel / Malta info.se@sccomec.com

SOUTH AMERICA Tel. +34 93 540 75 75 info.es@socomec.com

MORE DETAILS www.socomec.com/worldwide

YOUR DISTRIBUTOR

DCC 176033 - 11/13 - Photo: Manth Barrhart - Realization; SOCOMEC

The second







