

SHERIFF™

SH548 SERIES FOR WET WALL MOUNT LOCATIONS

PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

PRODUCT FEATURES:

- » Surface wall mount – 5"×48"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage



SPECIFICATIONS

BASEPLATE: One-piece 16-gauge CRS baseplate with welded corners. Baseplate provided with six-point mounting holes and one wireway hole – see Cross Section/Details. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Lens is positioned in baseplate channels and retained with six stainless steel Torx® fasteners Baseplate/end caps mount flush to wall surface.

LENS: Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Stainless steel Torx® fasteners secure lens in baseplate channel.

ELECTRICAL: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

INSTALLATION: Six-point mounting required for Peace of Mind Guarantee®.

LISTINGS: UL and CUL listed for Wet Location. (Horizontal wall mount only.)




ORDERING INFORMATION (Ex: SH548W-2-32-RS-1-DV-FS)

Model	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options	Accessory
SH548W							
Lamp Quantity		Ballast Type		Options			
1	One Lamp	IS	Instant Start Electronic <10% THD (T8)	EL	Standard Lumen Battery Pack (32°F one-lamp operation)		
2	Two Lamps (T5,T8,40B)	RS	Rapid Start Electronic <10% THD (CFL, T8, T5, T5HO)	.187	.187" P12 Polycarbonate Lens		
3	Three Lamps (T8 only)	SB	Specified Ballast	AL	Marine Grade Aluminum Housing		
Lamp Type		Ballast Quantity		BSS	Brush Stainless Steel Housing		
28	F28T5	1	One	DLN	LED Night Light w/Light Level Control (100% - 20%)		
32	F32T8	2	Two	FS	Single Fuse & Holder		
54*	F54T5HO	Voltage		KO	Two 1/2" EMT Conduit Entry Knockouts (one per end cap)		
40B	F40TT (2)	120	120 Volt	OP	Opal Polycarbonate Lens		
		277	277 Volt	PSS	Painted Stainless Steel Housing		
		347	347 Volt	TN	5 Watt Twin Tube NPF Night Light (n/a w/ 347V or DV)		
		DV	120-277 Volts	Accessory			
				9500	Torx® Screwdriver		

*Available with one lamp only

DIMENSIONAL DATA

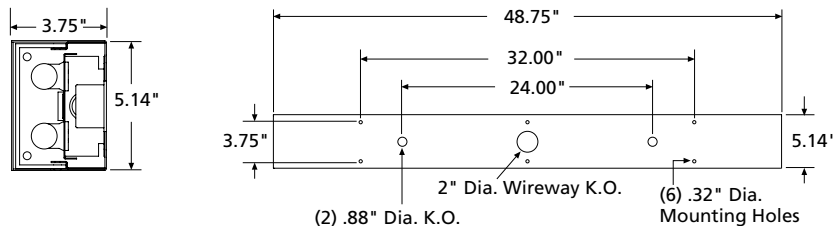

www.kenall.com

P: 800-4-Kenall

F: 847-360-1781

1020 Lakeside Drive Gurnee, Illinois 60031

When you see this image, you will know the Kenall product shown or described is designed and manufactured in the USA with components purchased from US suppliers, and meets the Buy American requirements under the ARRA. Kenall has not determined the origin of its domestically purchased components or the subcomponents thereof. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. © 2014 Kenall Mfg. Co. All rights reserved.

SH548W-021914