

# Turning Vane

## Double Wall Vane

Job: \_\_\_\_\_


Location: \_\_\_\_\_

Submitted To: \_\_\_\_\_

Submittal Prepared By: \_\_\_\_\_

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_

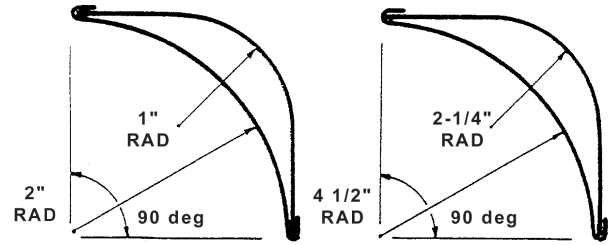

### MANUFACTURED BY



1502 Industrial Drive  
 Monongahela, PA 15063  
 800-245-3188  
 www.ductmate.com

### LOCAL SUPPLIER

### INDUSTRY REGULATIONS



Conforms to SMACNA dimensional and gauging requirements.

### PRODUCT GUARANTEE

Ductmate Double Wall Turning Vane is guaranteed against defective material.

### PACKAGING INFORMATION

Part Number	Size	Gauge	Feet/Bundle
2VGA26	2"	26	100'
4VGA24	4"	24	100'

### DESCRIPTION

2" and 4" Double Wall Turning Vane

### BASIC USE

Provide easy means for construction of consistent, double wall turning vanes systems, for the purpose of directing air around mitered elbow.

### FEATURES

- Dimpled seam for superior strength
- Consistent product quality
- Union made in the U.S.A.
- Available in a variety of specialty metals
- Available for 2" and 4" turning vanes

### TECHNICAL INFORMATION

#### Steel

Standard construction consists of G-60 galvanized. Available in Galvannealed, Stainless, Aluminized, Aluminum, Black Iron and PVC Coated.

#### Requirements

Ductmate Double Wall Vane is required when specifying the Ductmate PROrail system.