



Penal-Ware® 1695 Series Siphon Jet Toilet - Floor Outlet



1695-W-3-CN

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Siphon Jet Toilet - Floor Outlet

Fixture is arranged to be installed on finished wall and serviced from an accessible pipe chase. Optional Wall Sleeve or Metal Template is recommended for all installations for required wall openings. Toilet bowl is fabricated from 14 gage, type 304 stainless steel and is seamless welded construction. Housing is structurally reinforced and is sound-deadened with fire-resistant material. Exterior is polished to a satin finish. The inside of the toilet bowl also has a satin finish. There are no accessible voids or crevices where contraband can be concealed.

Toilet is siphon jet type with elongated bowl manufactured to ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.6 GPF. Trap has a minimum 3-1/2" seal and will pass a 2-1/8" ball. Toilet waste outlet is 7-1/2" Gasketed Waste with 6" mounting centers. Connecting hardware provided by installer.

Regularly Furnished items include 1/4"-20 x 1" long floor fasteners and mounting hardware for walls up to 8" thick.

GUIDE SPECIFICATION

Provide and install Acorn Penal-Ware Siphon Jet Toilet, Floor Outlet (specify model number and options). Toilet bowl shall be fabricated from 14 gage, type 304 stainless steel. Construction shall be seamless welded and exposed surfaces shall have a satin finish. Toilet shall be concealed siphon jet type with an elongated bowl, a self-draining flushing rim, and an integral contoured seat. Toilet shall meet ASME A112.19.3-2008 and CSA B45.4-2008 requirements and will flush with a minimum of 25 PSI flow pressure when used in conjunction with a minimum of 1.6 GPF. Toilet trap shall have a minimum 3-1/2" seal that shall pass a 2-1/8" diameter ball and be fully enclosed. Toilet waste outlet shall be 7-1/2" Gasketed Waste with 6" mounting center. Connecting hardware provided by installer. Fixture shall withstand loadings of 5,000 pounds without permanent damage. Fixture shall be furnished with necessary fasteners for proper installation.

Penal-Ware® 1695: Siphon Jet Toilet - Floor Outlet



WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: ☐ Concrete ☐ Block ☐ Steel

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

☒ 1695 Siphon Jet Toilet

SUPPLY (Must Specify)

☐ -T Top (Exposed)
☐ -W Wall (Concealed)

FIXTURE MOUNTING AND WASTE (Must Specify)

☒ -3 On-Floor, Floor Outlet

FLUSH VALVE GPF'S (Must Specify)

☐ -HET 1.28 GPF
☐ -ULF 1.6 GPF
☐ -3.5 GPF

FLUSH VALVE OPTIONS (Must Specify)


Refer to Acorn Dura-Ware Supplementary for Box Cover(s) and Access Panel(s)

- ☐ -EVSFV Electronic Flush Valve (N/A for Top Supply)
☐ -EVSPFV Electronic Flush Valve w/ Piezo Pushbutton (N/A for Top Supply)
☐ -FV Flush Valve, Mechanical (N/A for ADA)
☐ -FVBO Flush Valve by Others
☐ -FVH Flush Valve, Hydraulic
☐ -FVL Flush Valve, ADA Lever Handle
☐ -MVCFV Time-Trol Flush Valve (N/A for Top Supply)

PRODUCT OPTIONS (Must Specify)

- ☐ -ADA ADA Compliant - 18" Integral Seat Height
☐ -CN Cap Nuts (2) (for 5/16"-18 UNC Hardware By Others)
☐ -EG Enviro-Glaze, Specify Color: _____
☐ Toilet Exterior Only
☐ Toilet Interior
☐ -FT Flood-Trol (Manual Reset)
☐ -FTA Flood-Trol Auto-reset
☐ -FTE Flood-Trol Electronic
☐ -FVT Flush Valve Thru Wall Connector
☐ -HET High Efficiency Toilet Design
☐ -HPS High Polished Seat #7 Finish
☐ -HS Hinged Seat
☐ -MT Metal Template (Only 1 Required Per Project)
☐ -PFS Punched for Hinged Seat by Others
☐ -SPS Suicide Prevention Skirt
☐ -SW Wall Sleeve
☐ -TF Transformer, 120VAC to 24VAC
☐ -TG 12 Gage Cabinet
☐ -TSC Toilet Shipping Cover
☐ -VAC Acorn Vac System

Please visit www.acorneng.com for most current specifications.

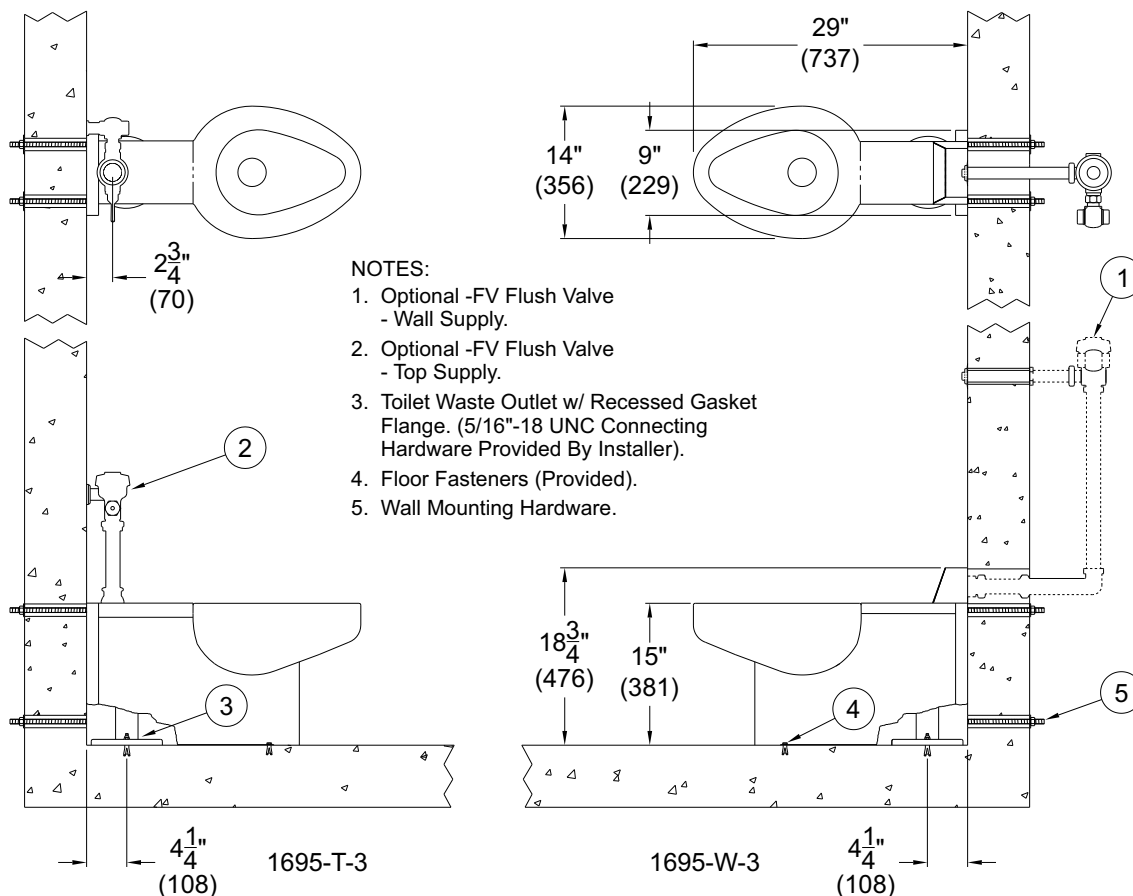

NOTES:

- Optional -FV Flush Valve - Wall Supply.
- Optional -FV Flush Valve - Top Supply.
- Toilet Waste Outlet w/ Recessed Gasket Flange. (5/16"-18 UNC Connecting Hardware Provided By Installer).
- Floor Fasteners (Provided).
- Wall Mounting Hardware.

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>