

SX-2000U2

Hi-Speed USB Device Server

! New - Print Server Functionality !




Provides Local Area Network Connectivity for USB 2.0 Hi-Speed Devices

Affordably turn your scanner & storage devices into a shared resource

Features & benefits

- Convert your USB 2.0 Hi-Speed devices to a shared Local Area Network resource.** The Hi-Speed USB device server provides fast Ethernet connectivity for your 2.0 Hi-Speed devices, instantly making it accessible anywhere on your LAN. The USB 2.0 Hi-Speed interface support assures seamless data transfer, thus it is most ideal for sharing a USB scanner and storage device on your existing LAN.
- Versatile, flexible and intuitive networkability with almost any USB devices.** The Hi-Speed USB device server allows the business or home user to improve productivity and save money by sharing a USB device among multiple LAN users. Examples of supported devices are Multi-Function or All-In-One printers, CD/DVD/ZIP drives, MP3 players, printers and digital cameras.*
- Smart utility for easy device management.** The Hi-Speed USB device server comes with "SX Virtual Link" which allows you to visually manage all of your networked USB devices in one window. You can remotely know the connected device availability in your LAN on a realtime basis. You can also use the USB device application software as if it were directly connected to your PC.
- Print server functionality.** Turn your SX-2000U2 USB device server easily into a true print server. Simply print from your application like you normally do. The bundled utility SX Virtual Link can be set to connect to the printer and send the job automatically, while still ensuring that the printer will become available for another user's print job or functions (e.g. scanning or storing with AIO printer).

Networking example

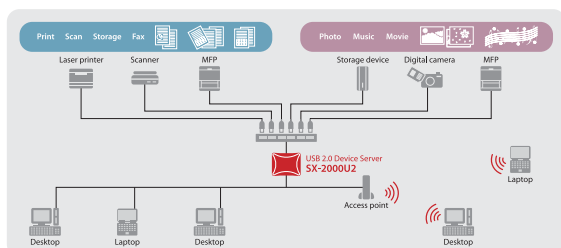

Specifications

! Macintosh compatible !

Supported Operating Systems	Windows 2000/XP, MacOS 10.2.7 or higher
Supported protocol	TCP/IP
Device interface	USB 2.0 Hi-Speed (A-Type) x 1
Network interface	10 BASE-T / 100 BASE-TX (Auto-detection)
Total number of USB interface connections	15 (including USB hub)
Configuration	Web browser, Quick Setup, telnet
Languages (Installation utility)	English, German, French, Italian, Spanish, Portuguese, Chinese, Japanese
Power supply	Universal AC adapter (AC100 - 240V)
Power consumption	5W (DC5V 1.0A)
Warranty	2 years
Regulatory approvals	FCC, CE, VCCI Class B
Package contents	SX-2000U2, Setup Guide, AC adapter, Warranty booklet, CD-ROM with configuration utilities and PDF manuals
Dimensions	3.1 x 3.9 x 1.1 in / 80 x 100 x 28 mm
Weight	3.5 oz / 100 g

*Does not support USB devices using isochronous data transfer over USB, such as web cameras and speakers.

*Some USB devices may not be supported depending on the USB device driver specification. Please visit our web site for the latest compatibility information.

SILEX TECHNOLOGY is a registered trademark of SILEX TECHNOLOGY, Inc. Other company or product names may be trademarks or registered trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2008 SILEX TECHNOLOGY EUROPE GmbH. All rights reserved.

Global sales & support: