


# Accessories



**AIRLESS PAINT SPRAYERS** 





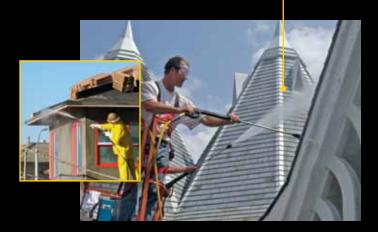

HEAVY-DUTY
PRESSURE WASHERS



TEXTURE SPRAYERS





## **Airless Tip Selection**

From state-of-the-art features to our color-coded tip handles, we make spray tips easier to use and select. Plus, we provide the technology to give you durable, reliable accessories that delivers a consistent spray pattern for a variety of materials.

White — 50 Mesh, For Latex

Green — 30 Mesh, For Heavy-Bonded Paints

- Patented diffuser allows atomization at lower pressures, reducing tip wear and extending tip life
- Pinned handle resists twisting and breakage
- Reversible for easy cleaning
- Liquid-honed for long life and double-tested to ensure accurate spray pattern and flow rate
- Highest-quality carbide tip produces longer useable life
- Color-coded handles for easy identification

ASM's color-coded tip handle and corresponding tip selection guide make it simple to select the right orifice and fan pattern for your painting application. Follow the steps below for easy tip selection.

## **Spray Tip Application Guide**

- 1 Identify the surface you will be spraying
- 2 Choose your coating
- **3** Determine your spray pattern width [spraying 12 in (30.5 cm) from the surface]
- 4 Follow chart to tip number

Tip handles are color-coded by orifice (tip hole) size for easy identification on the job site.

## Red — 200 Mesh, For Varnishes and Lacquers Yellow — 100 Mesh, For Enamels and Stains #5 = 1/2 Fan Width or 2 x 5 = 10 Inch Fan #5 = 1/2 Fan Width or 2 x 5 = 10 Inch Fan #5 = 1/2 Fan Width or 2 x 5 = 10 Inch Fan

#17 Orifice is diameter of opening in thousandths

**How to Determine Spray Tip Size:** 

**EXAMPLE**:

		Fan Width	Grey	Red	Orange	Yellow	Blue	Green	Purple	Brown	Black	Black	Black	Black	Black	Black	Black	Filter Mesh
Surface	Coating	in Inches	.009	.011	.013	.015	.017	.019	.021	.023	.025	.027	.029	.031	.035	.045	.061	Color Code
Wood Interiors,	Lacquer, Varnish, Shellac	2 in 4 in 6 in 8 in	309 409	211 311 411	413													
	Alkyd Stain, Alkyd Enamel, Sanding Sealer	10 in 12 in 4 in 6 in 8 in		211 311 411	513 613 213 313 413	415												
Interior Walls, Ceilings, Drywall	Latex, Vinyl, Acryl	2 in 4 in 6 in 8 in 10 in		211	113 213 313	115 215 315 415 515	417 517	419 519										
Roof Overhangs	Primer, Enamel, Latex, Acrylic	12 in 2 in 4 in 6 in 8 in 10 in			113 213	315 415 515	217 317 417 517	319 419 519	621	623								
Masonry, Block, Stucco, Concrete	Vinyl, Oil Base, Alkyd	12 in 6 in 8 in 10 in 12 in 16 in				415 515 615	617 417 517 617	619 419 519 619	421 521 621	423 523 623								
	Latex, Acrylic	8 in 10 in 12 in				013	417 517 617	419 519 619	421 521 621	423 523 623								
	Smooth Elastomeric	6 in 8 in 10 in 12 in 16 in						419 519 619	421 521 621	423 523 623	425 525 625	327 427 527	429	431 531 631	435 535 635 835	645	661	
Wood Exteriors, Shingle Siding, Shiplap	Exterior Stain	6 in 8 in 10 in 12 in				315 415 515	417 517 617	519 617							633			
	Vinyl, Acrylic, Latex	6 in 8 in 10 in 12 in				315 415	417 517 617	419 519 619	421 521 621									
Open Joists Ceiling Areas RIB Deck	Mil White High Build	6 in 8 in 10 in				315	317 417 517	319 419 519	321 421 521									
Ceilings	Dry Fall	12 in 6 in 8 in 10 in 12 in				315 415	317 417 517	419 519	421 521 621	423 523 623	425 525 625							

## **Universal Reversible Spray Tips**

- The Uni-Tip<sup>®</sup> is universal with major brands, including Titan<sup>®</sup>, SprayTECH<sup>®</sup>, Graco<sup>®</sup> RAC<sup>®</sup> IV and RAC 5 and Airlessco<sup>®</sup>. Not compatible with Graco RAC X<sup>®</sup>, ASM Super-Zip<sup>®</sup> or Zip-Tip<sup>®</sup>.
- Best quality carbide tip means a superior spray pattern and a longer useable fan pattern life
- The color-coded handle makes it easy to identify the tip size on the job
- Each tip individually tested for consistent fan and orifice size
- One-piece Uni-Tip seal means fewer parts on hand
- Uni-Tip seal is compatible with the full range of paints and solvents
- Pinned Handle resists twisting and breakage
- Nib on handle for seal replacement Part # **69-XXX**

## **Striping Uni-Tip**

- Specifically manufactured to provide crisp, clean edges
- Available in all common striping tip sizes



## **Fine-Finish Uni-Tip**

- All the features of the Uni-Tip Plus, double orifice gives greater break-up of fine-finish materials
- Provides the finest atomization and a high-quality finish
- Up to 85% transfer efficiency Part # 69-FFXXX

### Uni-Tip Hand-Tight Base/Guard (Tip not included)

- Aluminum won't rust
- Virtually eliminates paint buildup and dripping
- Easy no-tools assembly
- Quickly change from horizontal to vertical spray pattern Part # 248200 "G" thread is 7/8" (22 mm)

Part # **249303** "F" thread is 11/16" (17 mm)

## **Uni-Tip Seal**

• Easily installs without tools! Part # **248228** (5-pack)



## Standard Uni-Tips (69-XXX)

Fan Width in Inches	Grey .009	Red .011	Orange .013	Yellow .015	Blue .017	Green .019	Purple .021	Brown .023	Black .025	Black .027	Black .029	Black .031	Black .035	Black .045	Black .061
2 in			113	115											
4 in	209	211	213	215	217	219	221								
6 in	309	311	313	315	317	319	321			327					
8 in	409	411	413	415	417	419	421	423	425	427	429	431	435		
10 in	509	511	513	515	517	519	521	523	525	527		531	535		
12 in	609		613	615	617	619	621	623	625			631	635	645	661
16 in													835		

## Striping Uni-Tips (69XXXST)

Fan Width in Inches	Yellow .015	Blue .017	Green .019	Purple .021	Black .027
4 in	215	217			
6 in	315	317	319	321	327
8 in		417			
10 in		517			
12 in	615	617			

## Fine Finish Uni-Tips (69-FFXXX)

Fan Width in Inches	Red .011	Orange .013	Yellow .015	Blue .017	Green .019
4 in	211	213	215		
6 in	311	313	315		
8 in	411	413	415		
10 in		513		517	
12 in					619

## **Super-Zip**

## **Reversible Spray Tips**

- Liquid-honed and double-tested to ensure an accurate spray pattern
- Patented diffusion chamber for superior atomization
- Color-coded tip handles for easy selection
- Reversible to quickly clear tip clogs Part # **59-xxx**

## **Striping Super-Zips**

- Specifically manufactured to provide crisp, clean edges
- Available in all common striping tip sizes (213, 215, 315, 217, 317, 417, 219, 319, 419, Part # 59xxxST
   321, 421, 621, 323, 623, 625, 327, 627)



## **Fine-Finish Super-Zips**

- Double orifice gives greater break-up of fine-finish materials
- Provides the finest atomization and a high-quality finish
- Up to 85% transfer efficiency Part # **59FFXX-XXX**

CIII	nor-7in	<b>Hand-Tig</b>	ht Raca	/Guard
3u	per-zip	nallu-lly	IIIL Dase	Juaru

- Hand-Tight Base no tools required!
- Patented Cartridge Seal is compatible with all materials, will last through multiple tips and is spring-loaded for easy tip insertion and removal
- Patented safety tab design locks for safe tip reversing when unclogging tip
- Available to fit all makes of guns
   Part # 5901-F Fits "F" thread size 11/16 in (17 mm)
   Part # 5901-G Fits "G" thread size 7/8 in (22 mm)

## **Super-Zip Cartridge Seals**

- Replace Cartridge Seals quickly, without tools
- No loose gaskets
   Part # 5907 Hand-Tight Cartridge Seal



Tip size imprinted

Handle color-coded

denoting orifice size

on handle

Locking tab

Patented diffuser chamber

Tungsten carbide spray tip

Hardened stainless

steel barrel




## **Super-Zip Selection Guide**

	FAN WIDTH IN INCHES	GREY .009 0.08	FILTER	RED .011 0.12	FILTER	ORANGE .013 0.17	FILTER	YELLOW .015 0.23	FILTER	.017 0.30	FILTER	GREEN .019 0.36	FILTER	PURPLE .021 0.46	FILTER	BROWN .023 0.55	FILTER	.025 0.66	FILTER	.027 0.77	FILTER	.029 0.88	FILTER
	2 in	•		111		113		115		117		119		121		•		•		•		•	
	4 in	209		211		213		215		217		219		221		•		•		•		•	
Į	6 in	309		311		313		315		317		319		321		323		325		327		•	
Į	8 in	409		411		413		415		417		419		421		423		425		427		429	
ı	10 in	•		511		513		515		517		519		521		523		525		527		529	
ı	12 in	•		611		613		615		617		619		621		623		625		627		629	
	14 in	•		•		•		715		717		719		721		723		725		•		729	Ш
Į	16 in	•		•		813		815		817		819		821		823		•		827		829	Ш
	18 in	•		•		•		915		917		•		921		•		925		•		•	
j	FAN WIDTH IN INCHES	BLACK .031 1.02	FILTER	BLACK .033 1.16	FILTER	BLACK .035 1.31	FILTER	BLACK .039 1.62	FILTER	BLACK .041 1.79	FILTER	BLACK .043 1.98	FILTER	BLACK .045 2.16	FILTER	BLACK .047 2.36	FILTER	BLACK .049 2.57	FILTER	BLACK .051 2.81	FILTER	BLACK .053 3.00	FILTER
	WIDTH IN	.031	FILTER	.033	FILTER	.035	FILTER	.039	FILTER	.041	FILTER	.043	FILTER	.045	FILTER	.047	FILTER	.049	FILTER	.051	FILTER	.053	FILTER
	WIDTH IN INCHES	.031 1.02	FILTER	.033 1.16	FILTER	.035 1.31	FILTER	.039 1.62	FILTER	.041 1.79	FILTER	.043 1.98	FILTER	.045 2.16	FILTER	.047 2.36	FILTER	.049 2.57	FILTER	.051 2.81	FILTER	.053 3.00	FILTER
	WIDTH IN INCHES 2 in	.031 1.02	FILTER	.033 1.16	FILTER	.035 1.31	FILTER	.039 1.62	FILTER	.041 1.79 •	FILTER	.043 1.98 •	FILTER	.045 2.16	FILTER	.047 2.36	FILTER	.049 2.57 •	FILTER	.051 2.81	FILTER	.053 3.00	FILTER
	WIDTH IN INCHES 2 in 4 in	.031 1.02 •	FILTER	.033 1.16	FILTER	.035 1.31	FILTER	.039 1.62 •	FILTER	.041 1.79 •	FILTER	.043 1.98 •	FILTER	.045 2.16	FILTER	.047	FILTER	.049 2.57	FILTER	.051	FILTER	.053 3.00 •	FILTER
	WIDTH IN INCHES 2 in 4 in 6 in	.031 1.02 • •	FILTER	.033 1.16 • •	FILTER	.035 1.31 • • 335	FILTER	.039 1.62 • • 339	FILTER	.041 1.79 •	FILTER	.043	FILTER	.045	FILTER	.047	FILTER	.049 2.57	FILTER	.051	FILTER	.053	FILTER
	WIDTH IN INCHES 2 in 4 in 6 in 8 in	.031 1.02 • • 331 431	FILTER	.033 1.16 • • 333 433	FILTER	.035 1.31 • • 335 435	FILTER	.039 1.62 • • 339 439	FILTER	.041 1.79 • • 441	FILTER	.043	FILTER	.045 2.16	FILTER	.047 2.36 • • 447	FILTER	.049 2.57 • • • 449	FILTER	.051 2.81 • • 451	FILTER	.053 3.00 • • 453	FILTER
	WIDTH IN INCHES 2 in 4 in 6 in 8 in 10 in	.031 1.02 • • 331 431 531	FILTER	.033 1.16 • • 333 433 533	FILTER	.035 1.31 • • 335 435 535	FILTER	.039 1.62 • • 339 439 539	FILTER	.041 1.79 • • • 441 541	FILTER	.043 1.98 • • 443 543	FILTER	.045 2.16 • • 445 545	FILTER	.047 2.36 • • 447 547	FILTER	.049 2.57 • • 449 549	FILTER	.051 2.81 • • 451 551	FILTER	.053 3.00 • • 453 553	FILTER

REFERENCE

---- COLOR ---- ORIFICE SIZE ---- GPM / FLOW



## Flat Tip Systems Standard Flat Tips

• Flat Tips are universal and fit all makes of Flat Tip Bases Part # **90-xxx** 



## Flat Tip Base/Guard

- Flat Tip Bases are universal and are available to fit all makes of guns
- Accommodates Flat Tip-n-Gasket (93-xxx) and Standard Flat Tips (90-xxx)

Part # **420-F** Fits "F" thread size - 11/16 in (17 mm)
Part # **420-G** Fits "G" thread size - 7/8 in (22 mm)

• Separate tip gasket available in tubes of eight (8)

Part # **401-8** 




## **Flat Tip Selection Guide**

FAN WIDTH IN INCHES	.007 0.04	FILTER	.009 0.08	FILTER	.011 0.12	FILTER	.013 0.17	FILTER	.015 0.23	FILTER	.017 0.30	FILTER	.019 0.36	FILTER	.021 0.46	FILTER	.023 0.55	FILTER
2 in	•		109		111		113		115		•		119		121		•	Ш
4 in	207		209		211		213		215		217		219		221		223	
6 in	307		309		311		313		315		317		319		321		323	
8 in	407		409		411		413		415		417		419		421		423	
10 in	•		509		511		513		515		517		519		521		523	
12 in	•		609		611		613		615		617		619		621		623	П
14 in	•		•		•		•		715		717		719		721		723	
16 in	•		•		•		813		815		817		819		821		823	
18 in	•		•		•		•		•		917		•		921		•	

FAN WIDTH IN INCHES	.025 0.66	FILTER	.027 0.77	FILTER	.029 0.88	FILTER	.031 1.02	FILTER	.033 1.16	FILTER	.035 1.31
2 in	•		•		•		•		•		•
4 in	•		227		•		•		•		235
6 in	325		327		•		331		•		•
8 in	425		427		429		431		433		435
10 in	525		527		529		531		533		535
12 in	625		627		629		631		633		635
14 in	725		•		729		•		•		735
16 in	•		827		829		831		833		835
18 in	925		•		•		•		•		935

FAN WIDTH IN INCHES	FILTER	.039 1.62	FILTER	.043 1.98	FILTER	.045 2.16	FILTER	.051 2.81	FILTER	.055 3.17	FILTER
2 in		•		•		•		•		٠	
4 in		•		•		•		•		•	
6 in		•		•		•		•		•	
8 in		439		•		•		451		•	
10 in		•		543		•		•		•	
12 in		•		•		645		•		655	
14 in		•		•		•		•		•	
16 in		•		•		•		•		•	
18 in		•		•		•		•		•	

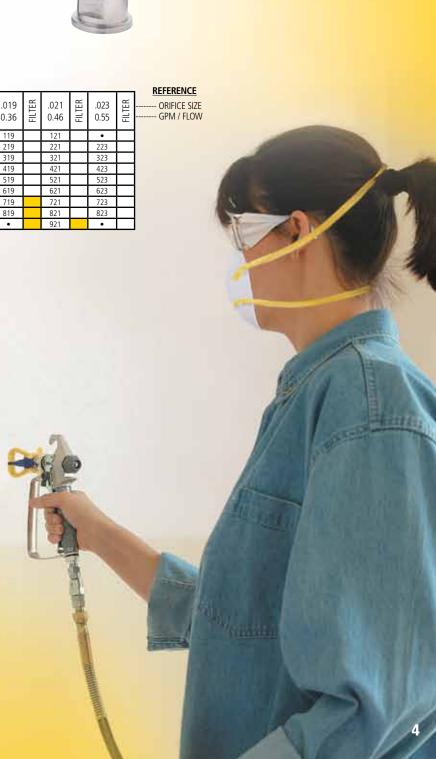

## THREAD SIZE ON DIFFUSER "F" = 11/16 "G" = 7/8

#### Guns

## **500 Series Professional Airless Spray Gun**

The ASM 500 Contractor Gun is new and designed for durability, spraying performance and a long life (Includes 517 Uni-Tip and Guard)

- Lightweight gun with easy trigger pull
- Heavy-duty swivel allows easy gun movement
- Split handle for easy filter removal
- Available "G" thread only
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # 289316 2-Finger Gun with Uni-Tip

Part # 288681 4-Finger Gun with Uni-Tip

Repair Kit # 288817



- Improved! Life of the 400 Series gun before repair is equal to or better than that of competitive guns (Includes 517 Uni-Tip and Guard)
- Heavy-duty swivel allows easy gun movement
- Anodized body resists corrosion
- Split handle for easy access to filter
- Available with "F" and "G" diffusers to match all systems
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # 248240 2-Finger Gun with Uni-Tip ("G" thread only)

Part # 456-SF, 456-SG 2-Finger Gun with Super-Zip

Part # 248239 4-Finger Gun with Uni-Tip ("G" thread only)

Part # 451-SF, 451-SG 4-Finger Gun with Super-Zip

Repair Kit # 4427-F, 4427-G

## 300 Series Professional Airless Spray Gun

- Improved! New needle design for reduced spitting and long life (Includes 517 Uni-Tip and Guard)
- Available with "F" and "G" diffusers to match all systems
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # 248238 2-Finger Gun with Uni-Tip ("G" thread only)

Part # 356-SF, 356-SG 2-Finger Gun with Super-Zip Tip

Part # 248237 4-Finger Gun with Uni-Tip ("G" thread only)

Part # 351-SF, 351-SG 4-Finger Gun with Super-Zip Tip

Repair Kit # 3027-F, 3027-G

## **200 Series Airless Spray Gun**

- Easy-access in-handle paint filter reduces tip clogging and improves finish (Includes 515 Uni-Tip and Guard)
- Comfortable 4-Finger Trigger
- Ideal for small projects
- Maximum working pressure 3600 psi (24.8 MPa, 248 bar)

Part # 251-U 4-Finger Gun with Uni-Tip

Part # 251-SG 4-Finger Gun with Super-Zip Tip

Not repairable

#### Combo Gun

- Well-balanced, lightweight, comfortable handle and trigger
- In-handle gun filter and internal trigger lock
- Add a Mini Pole or Maxi Pole for extra reach

Part # 248241 with 517 Uni-Tip and Uni-Tip Hand-Tight Base ("G" thread only)

Part # 6700-SF, 6700-SG with 517 Super-Zip and Super-Zip Hand-Tight Base

Repair Kit # **6727-F**, **6727-G** 













#### Hose

#### **Airless Hose**

- 3300 psi (22.7 MPa, 227 bar) rating
- Swivel couplers and spring guards on both ends
- Can be coupled with other airless hose
- Female fitting ends.

Part # **HSE1450** 1/4 in (6.4 mm) x 50 ft (15 m)

Part # **HSE3850** 3/8 in (9.5 mm) x 50 ft (15 m)

Part # **245449** 1/4 in (6.4 mm) x 25 ft (7.5 m)

## **Whip Hose**

Whip Hoses add flexibility and reduce operator fatigue

Part # **HSE3163** 3 ft (0.9 m) x 3/16 in (4.8 mm) (MXF)

Part # **HSE3165** 5 ft (1.5 m) x 3/16 in (4.8 mm) (MXF)

#### **Gun Hose Kits**

• 500 Series Contractor Gun with Uni-Tip, Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose ("G" thread only)

Part # **256244** (4-Finger)

Part # **256245** (2-Finger)

 400 Series Professional Gun with Uni-Tip, Uni-Tip Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose

Part # 248249 ("G" thread only) (4-Finger)

Part # 248250 ("G" thread only) (2-Finger)

 400 Series Professional Gun with Super-Zip, Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose

Part # **451-SHF** ("F" thread), **451-SHG** ("G" thread) (4-Finger)

Part # **456-SHF** ("F" thread), **456-SHG** ("G" thread) (2-Finger)

• 300 Series Contractor Gun with Super-Zip, Hand-Tight Base and 1/4 in (6.4 mm) x 50 ft (15 m) Airless Hose

Part # **351-SHF** ("F" thread), Part # **351-SHG** ("G" thread) (4-Finger)

Part # **356-SHF** ("F" thread), Part # **356-SHG** ("G" thread) (2-Finger)

#### **Gun and Hose Connectors**

Part # 4410 3/8 in (npt) x 3/8 in (npt) MBE

Part # **4413** 1/4 in (npt) x 1/4 in (npt) Hex Nipple MBE

Part # **4414** 1/4 in (npt) x 3/8 in (npt) MBE

Part # **162485** 3/8 in (npt) x 3/8 in (npsm) MBE

Part # 239663 1/4 in (npt)(M) x 1/4 in (npsm)(F) Swivel

#### **Hose Cover**

 4 mil poly protects your airless hose from paint and abrasion damage. Comes in 1000 ft roll with perforations each 50 ft

Part # 865696 ASM Hose Cover Roll

Part # 867610 ASM Hose Case of 6 Rolls













#### **Mini Poles**

- Durable stainless steel construction for rust resistance
- Hand-Tight system allows for easy attachment to gun, without tools
- Two or more poles can be combined for extended reach
- Available in 4 lengths and "F" and "G" thread sizes to fit all guns
- For spraying ceilings, overhangs, floors, and decks

#### 3400 Series

#### With Uni-Tip Hand-Tight Base ("G" thread only)

,	Part # <b>248233</b>	6 in (15.2 cm)
3400 Series	Part # <b>248234</b>	12 in (30.5 cm)
Mini Pole	Part # <b>248235</b>	18 in (45.7 cm)
	Part # <b>248236</b>	24 in (61.0 cm)

#### With Super-Zip Hand-Tight Base

6 in (15.2 cm)	Part # <b>3406-SF</b>	Part # <b>3406-SG</b>
12 in (30.5 cm)	Part # <b>3412-SF</b>	Part # <b>3412-SG</b>
18 in (45.7 cm)	Part # <b>3418-SF</b>	Part # <b>3418-SG</b>
24 in (61.0 cm)	Part # <b>3424-SF</b>	Part # <b>3424-SG</b>

#### With Flat Tip Base Wrench Tight

6 in (15.2 cm)	Part # 2406-F	Part # <b>2406-G</b>
12 in (30.5 cm)	Part # <b>2412-F</b>	Part # <b>2412-G</b>
18 in (45.7 cm)	Part # <b>2418-F</b>	Part # <b>2418-G</b>
24 in (61.0 cm)	Part # <b>2424-F</b>	Part # <b>2424-G</b>

#### 3500 Series\*(with Anglehead)

#### With Uni-Tip Hand-Tight Base ("G" thread only)

6 in (15.2 cm)	Part # <b>255258</b>	
12 in (30.5 cm)	Part # <b>255259</b>	3500 Series
18 in (45.7 cm)	Part # <b>255260</b>	Mini Pole
24 in (61.0 cm)	Part # <b>255261</b>	

#### With Super-Zip Hand-Tight Base

6 in (15.2 cm)	Part # <b>3506-SF</b>	Part # <b>3506-SG</b>
12 in (30.5 cm)	Part # <b>3512-SF</b>	Part # <b>3512-SG</b>
18 in (45.7 cm)	Part # <b>3518-SF</b>	Part # <b>3518-SG</b>
24 in (61.0 cm)	Part # <b>3524-SF</b>	Part # <b>3524-SG</b>

#### With Flat Tip Base Wrench Tight

6 in (15.2 cm)	Part # <b>2506-F</b>	Part # <b>2506-G</b>
12 in (30.5 cm)	Part # 2512-F	Part # <b>2512-G</b>
18 in (45.7 cm)	Part # 2518-F	Part # <b>2518-G</b>
24 in (61.0 cm)	Part # <b>2524-F</b>	Part # <b>2524-G</b>

#### **Maxi Poles**

Hand-Tight Maxi Poles accept Hand-Tight adapters and an additional Maxi Pole or Mini Pole for 12 ft maximum length.

- Includes Anglehead™ to adjust spray angle
- Available in "F" and "G" thread sizes to fit all guns

#### With Uni-Tip Hand-Tight Base ("G" thread only) With Super-Zip Hand-Tight Base

Part # <b>248242</b> 2 ft (60.9 cm)	Part # <b>7402-SF, 7402-SG</b> 2 ft (60.9 cm)
Part # <b>248243</b> 3 ft (91.4 cm)	Part # <b>7403-SF, 7403-SG</b> 3 ft (91.4 cm)
Part # <b>248244</b> 4 ft (121.9 cm)	Part # <b>7404-SF, 7404-SG</b> 4 ft (121.9 cm)
Part # <b>248245</b> 6 ft (182.9 cm)	Part # <b>7406-SF, 7406-SG</b> 6 ft (182.9 cm)
Part # <b>248246</b> 9 ft (274.2 cm)	Part # <b>7409-SF, 7409-SG</b> 9 ft (274.2 cm)

#### With Flat Tip Base

Part # **7302-F**, **7302-G** 2 ft (60.9 cm)
Part # **7303-F**, **7303-G** 3 ft (91.4 cm)
Part # **7304-F**, **7304-G** 4 ft (121.9 cm)
Part # **7306-F**, **7306-G** 6 ft (182.9 cm)
Part # **7309-F**, **7309-G** 9 ft (274.2 cm)

Maxi Pole

## Part # **233951** Pole Gasket (1)

Part # **3430-G**, **3430-F** Connect two poles

## AngleHead

• In-line AngleHead Swivel provides accurate spraying at any height or angle

- Swivels to 90° (shown) for easy spraying of challenging areas
- Tip not included

Part # 7506A ("F" thread) no base included

Part # 7506AG ("G" thread) no base included

Part # 248247 with Uni-Tip Hand-Tight Base ("G" thread only)

Part # **7506-SF** with Super-Zip Hand-Tight Base

Part # **7506-SG** with Super-Zip Hand-Tight Base

Part # **7551-G** Pole to Gun Adapter, Hand-Tight

Part # **7551-F** Pole to Gun Adapter, Hand-Tight

Part # 87500G With Flat Tip Guard, Wrench-Tight

Part # 87500F With Flat Tip Guard, Wrench-Tight

Part # **7556-G** Pole Gun Adapter, Wrench-Tight

Part # 7556-F Pole Gun Adapter, Wrench-Tight



0° to 90° (90° Shown)

## Zip-Roll™ Pressure Roller

The Zip-Roll pressure roller accessory attaches and is fed paint from your airless pump allowing you to use your system to roll in areas where spraying is not practical. Provides smooth, continuous delivery of paint to all types of surfaces. Just trigger gun to release paint to roller. Pressure rolling is 4 times faster than standard rolling!

- Extends reach no need for a ladder
- Chrome-plated stainless steel frame provides rust resistance and eliminates streaking
- Hand-Tight system for easy assembly no tools required

## Zip-Roll Pressure Roller

(Includes Combo Gun)	3 ft	6 ft
Wrench-Tight with Flat Guard	Part # <b>970309(F)</b>	Part # <b>970609(F)</b>
Wrench-Tight with Flat Guard	Part # <b>970309(G)</b>	Part # <b>970609(G)</b>
Hand-Tight with Zip Guard	Part # <b>980309(F)</b>	Part # <b>980609(F)</b>
Hand-Tight with Zip Guard	Part # <b>980309(G)</b>	Part # <b>980609(G)</b>
Hand-Tight with Super Zip Guard	Part # <b>980309(SG)</b>	Part # 980609(SG)
Hand-Tight with Super Zip Guard	Part # <b>980309(SF)</b>	Part # <b>980609(SF)</b>
Zip-Roll Frame only	Part # <b>244278</b>	



## 45° Swivel Fitting Kit

To be used between the gun and Heavy-Duty Extension for pressure rolling. ("G" to "G" thread)

Kit Includes (239531, 166969, 114049)

Part # 239531



#### **Gun Filters – 2-Pack**

Stainless Steel Mesh to eliminate rust
 200 Series



Part # **248677** 60 Mesh & 100 Mesh (1 ea.) **300, 400, 500 Series and Combo Gun** 

Part # 4435-2 Extra Fine 200 Mesh Red for Varnishes and Lacquers

Part # 4434-2 Fine 100 Mesh Yellow for Enamels and Stains

Part # 4433-2 Medium 50 Mesh White for Latex Paints

Part # 4436-2 Coarse 30 Mesh Green for Heavy-bodied Paints

#### **Paint Strainers**

Pre-filter your paint using Strainer Bags.
Part # **865662** Suction Filter Cover — 12 Pack
Part # **238769** Strainer Bags — 25 Pack



- Convenient Zip-Clip<sup>™</sup> holds roller cover securely on frame and quickly releases for easy cleanup
- Few parts for quicker cleaning time

## **Zip-Roll Pressure Roller**

Attaches to gun that comes with units. Includes: 45° "G" thread gun adapter, 24 in. (61 cm) extension, 9 in (23 cm) roller frame & 1/2 in (13 cm) nap cover Part # **287713** 



## **Zip-Roll Pressure Roller Covers**

High-quality, all-purpose Pressure Roller Covers, Available in a variety of Naps. (Must be ordered in multiples of 6)
Part # 7721 Smooth Surfaces — 9 in x 3/8 in (23 cm x .95 cm)
Part # 7722 Semi-Smooth Surfaces — 9 in x 1/2 in (23 cm x 1.27 cm)
Part # 7723 Medium Surfaces — 9 in x 3/4 in (23 cm x 1.90 cm)
Part # 7724 Rough Surfaces — 9 in x 1 1/4 in (23 cm x 3.18 cm)



## Quick Flush™

- The only clean water flushing system
- Cuts Sprayer clean-up time in half!
- Connects to standard garden hose to backflush sprayer through gun
- Includes "F" Adapter to work with all brands of gun Part # 865681 (Spray gun not included)

## **Gun Repair Kits**

 Includes Ball Valve Plunger, Assembly and Diffuser.

Part # **288817** 500 Gun repair kit

Part # 4427-F, 4427-G 400 Series Gun

Part # 3027-F, 3027-G 300 Series gun

Part # 6727-F, 6727-G Combo Gun

Note: 400 Series Gun Repair Kits may be used in 300 Series Guns.

## "F" to "G" Adapter

Converts 11/16 in (17 mm) "F"
 Thread to 7/8 in (22 mm) "G" Thread
 Part # 248248



## **ASM Professional Hopper Gun**

Sprays acoustics, drywall mud, waterproofing material, pool deck sealant, stucco, and most gravity-fed materials. Angled 1-1/2 gallon (5.7 L) hopper allows more material capacity for longer spraying before refills!

Zip-Tex<sup>™</sup> 650 Gun

Part # 288906 Gun only Zip-Tex 750, 900 and 1000 Part # 288905 Gun only

Part # **246409** Gun including Hopper





#### **Spray Nozzles**

Part # **234153** Beige, 4 mm — Fine Finish, Orange Peel

White, 6 mm — Orange Peel, Fine Splatter

Gray, 8 mm — Splatter, Small to

Medium Knockdown

Black, 12 mm — Acoustics, Large Knockdown, Popcorn

#### **Replacement Parts**

Part # **234149** 25 ft (7.6 m) Material/Air Hose

(Zip-Tex 750, 900 & 1000)

Part # 288622 20 ft Material/Air Hose Kit for Zip-Tex 650

Part # 15C090 Viscosity Ball – All Machines

Part # 234156 RotoFlex Replacement Pump Hose

(Zip-Tex 750 & 1000 only) Recommended replacement after 2000-2500 gallons (7571-9463 L) of gypsum-based material

Part # 288623 RotoFlex II Replacement Pump Hose

(Zip-Tex 650 & 900 only)

Part # 234159 Gun Repair Kit (All guns except 288906 Gun)

Part # **258000** Gun Repair Kit for 288906 Gun
Part # **234162** Material Hose Plug and Hopper Gun

Attachment Plug

Part # 234188 Hopper Clamp

## **PRESSURE WASHER ACCESSORIES**

## Standard Nozzles (2525)(2730)

Part # **244768** - Includes: 0°, 15°, 25°, 40°

Part # 805634 - Includes: Chemical Injector Nozzle

Part # 805535 - 0° Red

Part # **805536** - 15° Yellow

Part # **805537** - 25° Green

Part # 805538 - 40° White



## Standard Nozzle (3030)

Part # **244769** - Includes: 0°, 15°, 25°, 40°

Part # 805634 - Includes: Chemical Injector Nozzle

Part # **805539** - 0° Red

Part # **805540** - 15° Yellow

Part # 805541 - 25° Green

Part # 805542 - 40° White

## **Rotating Nozzle**

Part # 198012

Oscillating Nozzle (Not Shown)

Part # 198013



## High Pressure Non-Marking Hose

3/8 in x 50 ft (10 mm x 15 m), 3000 psi (21.0 MPa, 210 bar) Part # **245416** for 2730/3030

3/8 in x 30 ft (10 mm x 8 m), 3000 psi (21.0 MPa, 210 bar) Part # **118125** for 2525

## Guns

#### Part # 244784

Gun with vented composite wand handle and quick-connect fittings, 5000 psi (344 bar, 34.4 MPa) max. working pressure

Part # **246674** for use with 2525 only Gun only

Part # **118124** Gun Extension for 2525



#### **Fluids**

ASM fluids and protectants keep your equipment in top performing condition. ASM fluids are approved for use in all airless pumps.

### **Pump Life**™

- Protects pump from corrosion and rust during shortand long-term storage
- Lubricates and cleans to help stop sticking valve seats
- Freeze proof to -30° F (-34° C)
   Part # 245650 (8 oz, 237 ml; 48 per case)
   245423 (32 oz, 946 ml; Available in multiples of 6)

## **Packing Seal®**

- Prevents coating material from adhering to the pump's piston rod
- Prolongs pump packing life in all brands of piston pumps Part # **245427** (8 oz, 237 ml; Available in multiples of 6) Part # **245428** (32 oz, 946 ml; Available in multiples of 12)

## **Hydraulic Fluid**

- Non-foaming formula
- Resists emulsifying and chemical breakdown Part # 245425 (32 oz, 946 ml; Available in multiples of 12)

#### **Starter Kit**

• For lubrication and protection
Part # **245651** (8 oz, 237 ml; Pump Life) (4 oz, 119 ml; Packing Seal)

#### **STAY CLEAN™**

Spray protectant for machine to prevent paint from sticking to it.
 Keeps your sprayer looking new for years!
 Part # 865705 (14 oz, 379 grams) case of 12 cans

## **MagiCLEAN**<sup>™</sup>

 Safely removes paint from sprayers hose, tips and guns
 Part # 865657 (Starter kit with 3 gal. MagiCLEAN, strainer basket and residue tray)

Part # **865656** Refill bottle for starter kit
Part # **865655** Case of 12-8 oz jars for cleaning tips, guards
and gun filters

## **Pump Conditioner**

• Should be used on piston pumps between uses to prevent paint from drying on the piston & causing packing wear

Part # **865712** Display of 48 - 1 oz bottles

Part # **865714** (1 Quart; .951) bottle – case of 12

Part # **865715** (1 Gallon; 3.78 l) bottle – case of 4

Case quantity: 12 on quarts, 4 on gallons





#### **ASM CUSTOMER SERVICE**

20500 David Koch Ave. Rogers, MN 55374 Phone: 800-854-4025 Fax: 800-228-5104

#### **WARRANTY**

ASM warrants its products to be free of defects in material and workmanship for one year. See operation manual for complete warranty information.

#### **ASM AUTHORIZED SERVICE AGENCIES**

Call 1-800-854-4025 or see our website for the nearest ASM Authorized Service Agency.

VISIT US ON THE WEB FOR PROMOTIONS, PRODUCT UPDATES, MANUALS, SERVICE CENTERS AND GENERAL INFORMATION.

www.asmcompany.com







©2010 ASM Company. Form No. 341524 Rev. A 12/10 Printed in U.S.A. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.