



PROFESSIONAL  
OUTDOOR LIGHTING

Type:

Model:

Project:

## SPECIFICATION SHEET

### MODEL 2150 Landscape Series • Brass & Copper • Specialty Lights

#### FIXTURE SPECIFICATIONS:

##### HOUSING:

Heavy-gauge, extruded, solid copper or Stainless steel tubing fitted to a precision CNC-machined, solid brass base with dual silicone O-ring gaskets – providing a superior weather-tight seal.

##### FINISH:

Brushed natural copper or stainless steel.

##### SOCKET/LAMP HOLDER:

Top grade ceramic socket with nickel contacts, stainless steel springs, and Teflon-jacketed wire leads.

##### LENS:

Clear, tempered, shock and heat-resistant, soda-lime glass lens. Optical effect lenses are available; see accessories column on fixture ordering information chart.

##### LAMP TYPE:

MR-16 Halogen – 35W maximum. LN-20 BAB (20W) Standard.

##### MOUNTING:

Solid brass loop with a six-foot stainless steel cable-hanger included.

##### FASTENERS:

Fasteners are stainless steel and brass.

##### WIRING:


Prewired with a three-foot pigtail of 18-2 SPT1 UV-resistant cable and weather-resistant connectors for a secure connection to supply cable.

##### CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838). Maximum wattages allowed by Underwriters Laboratories (UL) for U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN U.S.A.**

#### DIMENSIONS:

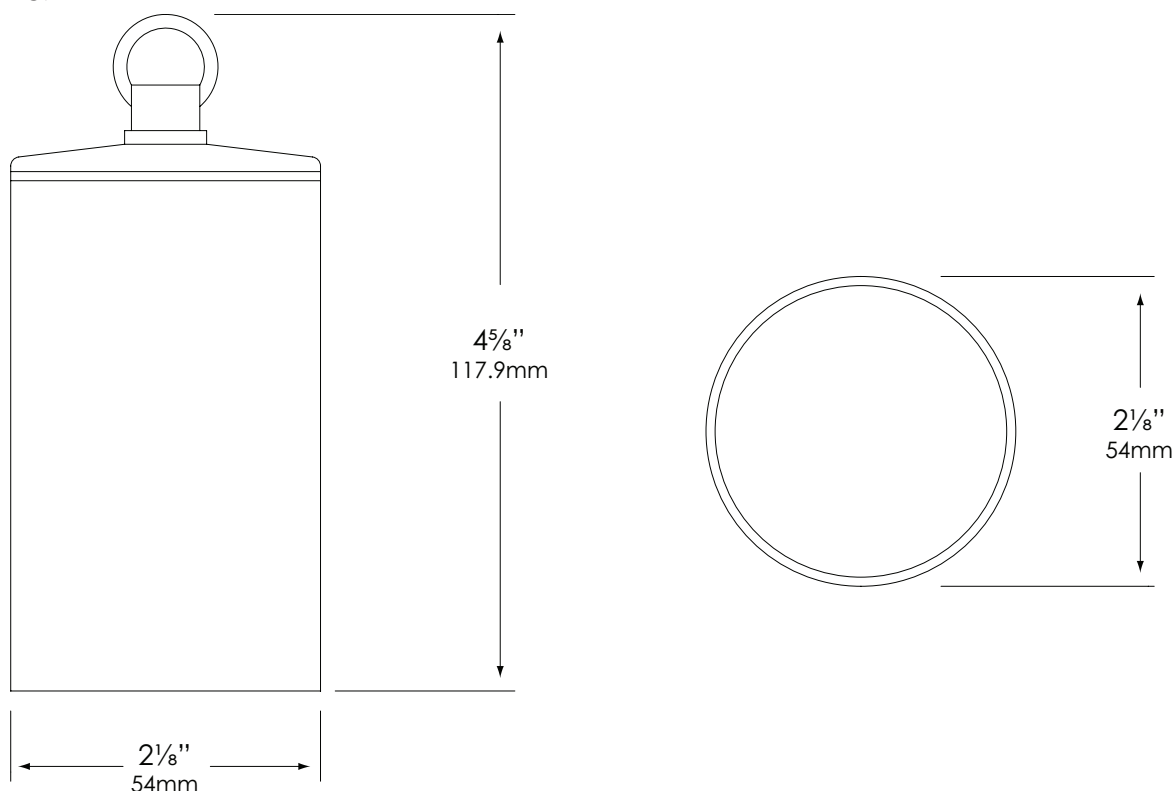

Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



PROFESSIONAL  
OUTDOOR LIGHTING

## SPECIFICATION SHEET

### MODEL 2150 Landscape Series • Brass & Copper • Specialty Lights

#### FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

**EXAMPLE: HT-2150-CSN-BAB-BL**

MOUNTING	MODEL	FINISH	LAMP	ACCESSORIES
HT- Brass loop with stainless steel cable	2150	CSN - Natural copper SS - Stainless steel	MR-16 Halogen 35W maximum LN-20 BAB/FG (20W) Standard  (Please see lamp order code column on lamp guide, Vista product catalog.)	BL – Flat Cool Blue lens SL – Flat Spread lens FR – Flat Frosted lens CX – Convex Clear lens CFR – Convex Frosted lens DBL – Flat Dark Blue lens GL – Flat Dark Green lens RL – Flat Red lens YL – Flat Amber lens HL – Honeycomb louver

*Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.*